
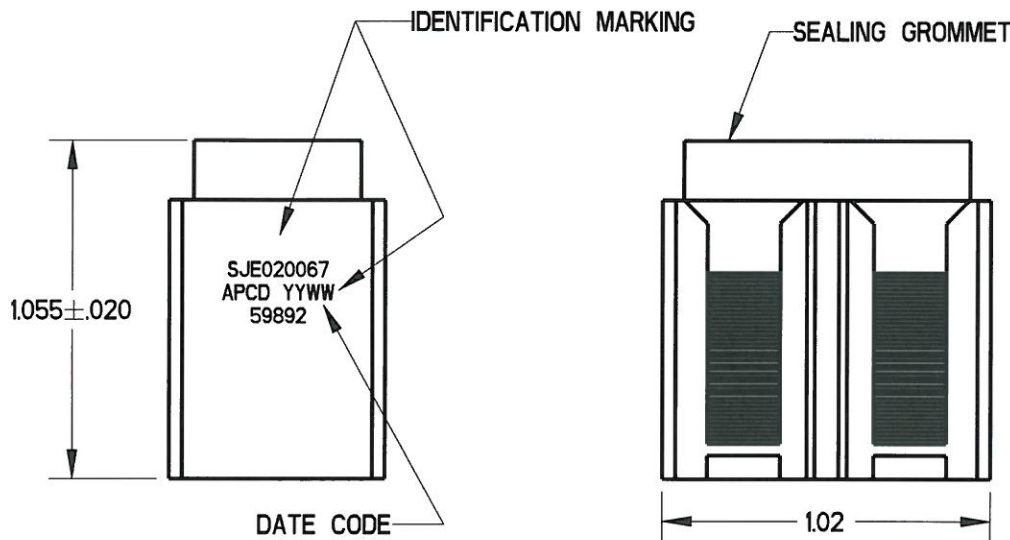
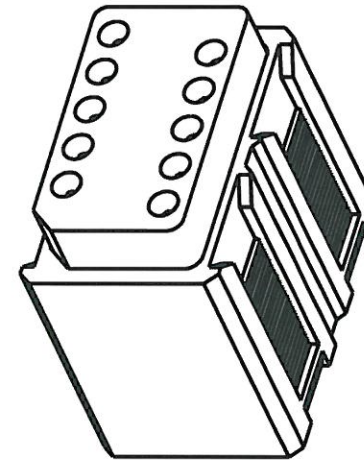


REV	ECN	APP'D
-	6519	JT 4/15/10



NOTES:

1. MATERIALS:
 BODY: POLYETHERIMIDE PER ASTM-D5205.
 GROMMET: SILICONE BLEND ELASTOMER.
 RESISTOR: 56.2KΩ, RNC55H5622FS, POWER RATING:
 1/8W @ 70 °C, 1/10W @ 125 °C. QTY: 5.
 INTERNAL PIN CONTACT:
 COPPER ALLOY, HARD GOLD PLATE PER MIL-DTL-45204.
2. PERFORMANCE SPECIFICATION PER SAE-AS8174.
 (SUBJECT TO LIMITATIONS OF THE ELECTRONIC COMPONENTS)
 TEMPERATURE: -65 °C TO 200 °C.
 INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 25 °C.
 DIELECTRIC WITHSTANDING VOLTAGE:
 1500 VRMS AT SEA LEVEL,
 AND 200 VRMS AT 100,000 FT. ALTITUDE.
 CURRENT RATING: 7.5A FOR SIZE 20 CONTACTS.
 VIBRATION AND SHOCK: PER SAE-AS8174 PARA 3.5.8 & 9.
3. MODULE ACCEPTS SOCKET CONTACTS (10) M39029/22-192.
4. MODULE TO BE MOUNTED ON M81714/67 RAIL SYSTEM.

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±1.0°	PROJECTION 	Amphenol Pcd SPECIFICATION DRAWING ENGR M. DiGIACOMO 3/29/10			TITLE SJE SERIES ELECTRONIC MODULE (5) 56.2KΩ, RNC55H5622FS		
			ORIGINAL 	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD BEVERLY, MA, USA		CHKD <i>Rid Neuman 4/15/10</i>	APPD <i>Jalut 4/15/10</i>	SIZE A
			CODE: 58982	SCALE: 1.667	SHEET 1 OF 1			