



soberton inc.

SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-1511S-1



Release | Revision: B/2018

CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

Page 1
Speaker Electroacoustic Characteristics

General Specifications

Page 2
Frequency Measuring Circuit (Receiver Mode)

Typical Frequency Response Curve (Speaker Mode)

Test Climatic Conditions

Page 3
Reliability Tests

Page 4
Heat Shock Test

Temp. Cycle Test

Page 5
Dimensions

Page 6
Packing

Dynamic Speaker Electroacoustic Characteristics

Sound Pressure Level

83±3dB SPL @ 2KHz 1.0V(Sine wave) 0.1m measured with baffler shown in Fig.1. (1CC BOX)

Measuring Diagram

Shown in Fig.1

Typical Frequency Response Curve

Shown in Fig. 2

Resonance Frequency

850±20%Hz @ 1Vrms. (In 1CC BOX)

Input Power (Nominal and Maximum)

Rated Noise Power: 0.7W (In 1CC Box)

Short Term Max Power: 0.8W (In 1CC Box)

Operation Test

Must be free audible noise (buzzes and rattles)

400 ~ 5000Hz frequency range, input level up to 2.0Vrms (In 1CC BOX)

Distortion

Less than 5% at 1KHz 1V

General Specifications

Operating Temperature Range

-25°C ~ +65°C

Storage Temperature Range

-40°C ~ +75°C

AC Impedance

8Ω±15% (@2KHz 1Vrms)

Dimension

15 x 11 x 3.3 mm

IP Rating

No rating



soberton inc.

SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-1511S-1



Release | Revision: B/2018

CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

Page 1

Speaker Electroacoustic Characteristics

General Specifications

Page 2

Frequency Measuring Circuit (Receiver Mode)

Typical Frequency Response Curve (Speaker Mode)

Test Climatic Conditions

Page 3

Reliability Tests

Page 4

Heat Shock Test

Temp. Cycle Test


Page 5

Dimensions


Page 6

Packing

Frequency Measuring Circuit - Receiver Mode (Fig. 1)

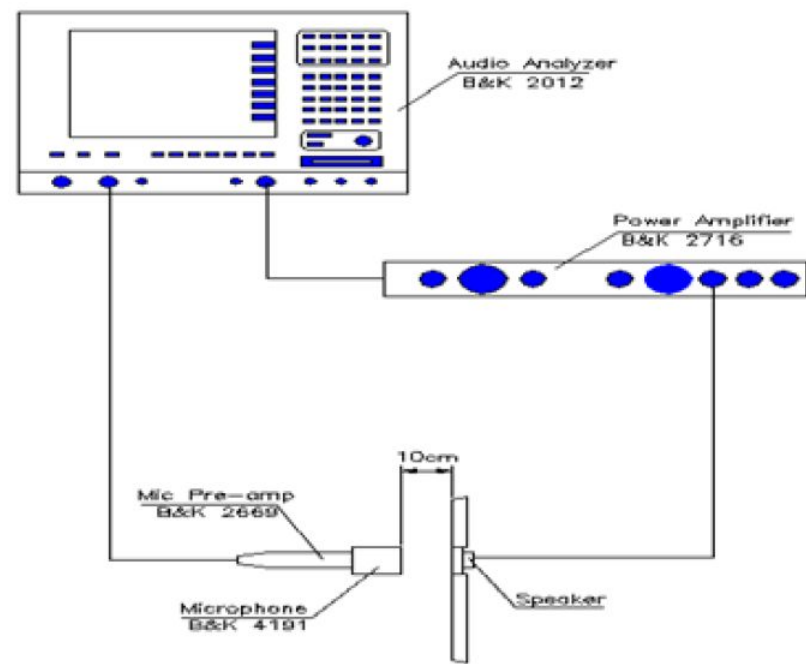

Typical Frequency Response Curve - Speaker Mode (Fig. 2)

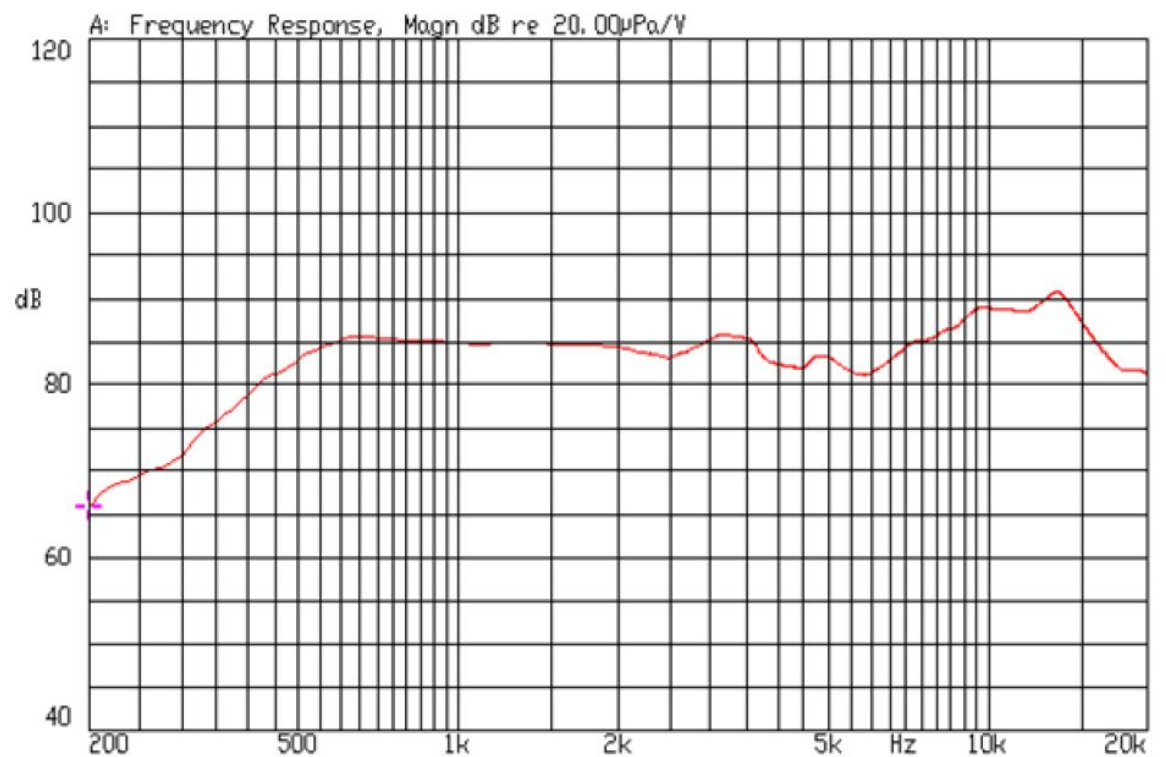

TEST CLIMATIC CONDITIONS

Standard Test Condition

Temperature 17 ~ 25°C

Relative humidity 45% ~ 80%(RH)

Air pressure 860~1060 hPa



soberton inc.

SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-1511S-1



Release | Revision: B/2018

CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

Page 1

Speaker Electroacoustic Characteristics

General Specifications

Page 2

Frequency Measuring Circuit (Receiver Mode)

Typical Frequency Response Curve (Speaker Mode)

Test Climatic Conditions

Page 3

Reliability Tests

Page 4

Heat Shock Test

Temp. Cycle Test

Page 5

Dimensions

Page 6

Packing

Reliability Tests

The sound pressure as specified will neither deviate more than $\pm 3\text{dB}$ from the initial value, nor have any significant damage after any of following testing.

High Temperature Test

High Temperature $+80\pm 2^\circ\text{C}$

Duration 48 hours

Low Temperature Test

Low Temperature $-30\pm 2^\circ\text{C}$

Duration 48 hours

Heat Shock Test (See in Fig. 3)

High Temperature $+80\pm 2^\circ\text{C}$

Low Temperature $-30\pm 2^\circ\text{C}$

Changeover Time $< 5\text{ min}$

Duration 1 hour

Cycle 10

Humidity Test

Temperature $+40\pm 2^\circ\text{C}$

Relative Humidity 90%~95%

Duration 48 hours

Temperature Cycle Test (See in Fig. 4)

Temperature -40°C $+75^\circ\text{C}$

Duration 45 minutes 45 minutes

Temperature gradient $1\sim 3^\circ\text{C}/\text{min}$

Cycle 10

Drop Test

Mounted with dummy set mass 100 g

Height 1.5 m

Cycle 6 (1 each plain) onto the concrete board

Load Test

Speaker mode: White noise (EIA filter) for 96 hours @ 0.7W (1CC BOX) (2.0Vrms)



soberton inc.

SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-1511S-1



Release | Revision: B/2018

CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

Page 1

Speaker Electroacoustic Characteristics

General Specifications

Page 2

Frequency Measuring Circuit (Receiver Mode)

Typical Frequency Response Curve (Speaker Mode)

Test Climatic Conditions

Page 3

Reliability Tests

Page 4

Heat Shock Test

Temp. Cycle Test


Page 5

Dimensions


Page 6

Packing

Heat Shock Test (Fig. 3)

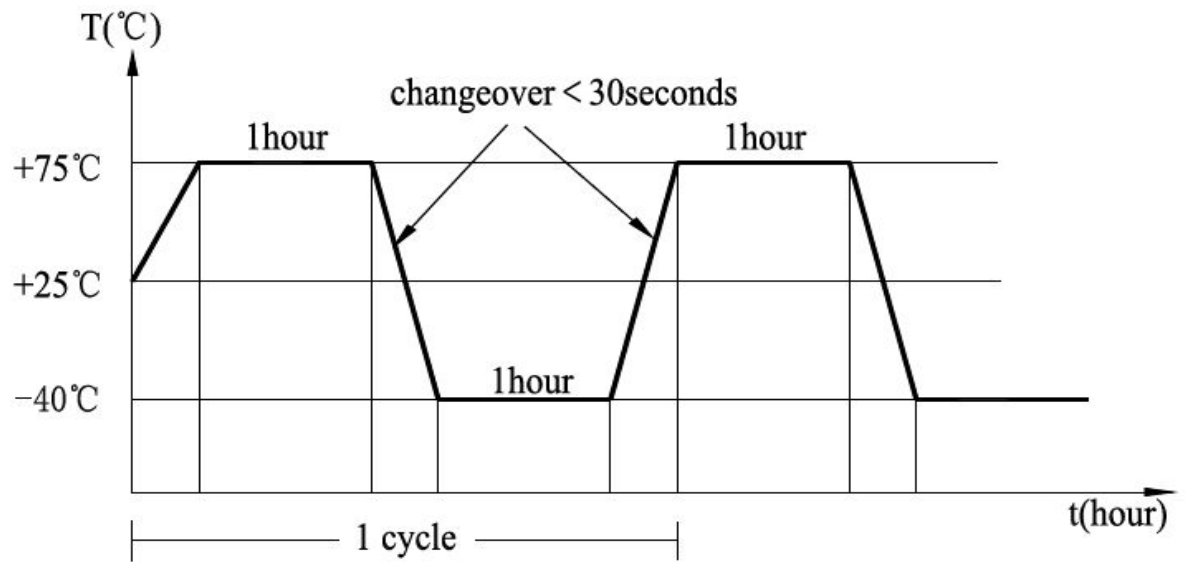

Temp. Cycle Test (Fig. 4)

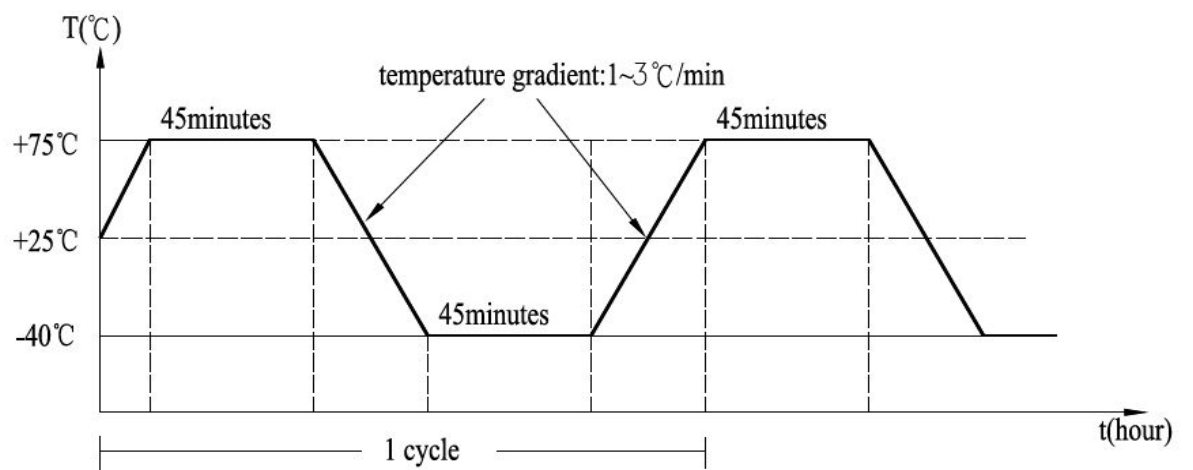



soberton inc.

SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-1511S-1



Release | Revision: B/2018

CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

Page 1

Speaker Electroacoustic Characteristics

General Specifications

Page 2

Frequency Measuring Circuit (Receiver Mode)

Typical Frequency Response Curve (Speaker Mode)

Test Climatic Conditions

Page 3

Reliability Tests

Page 4

Heat Shock Test

Temp. Cycle Test

Page 5




Dimensions

Page 6

Packing

Dimensions

Tolerance: ± 0.5 (unit: mm)

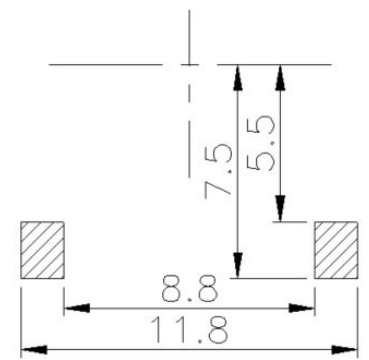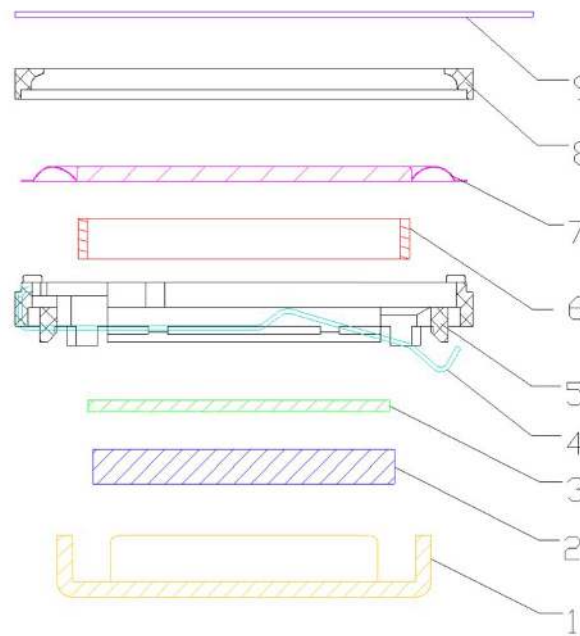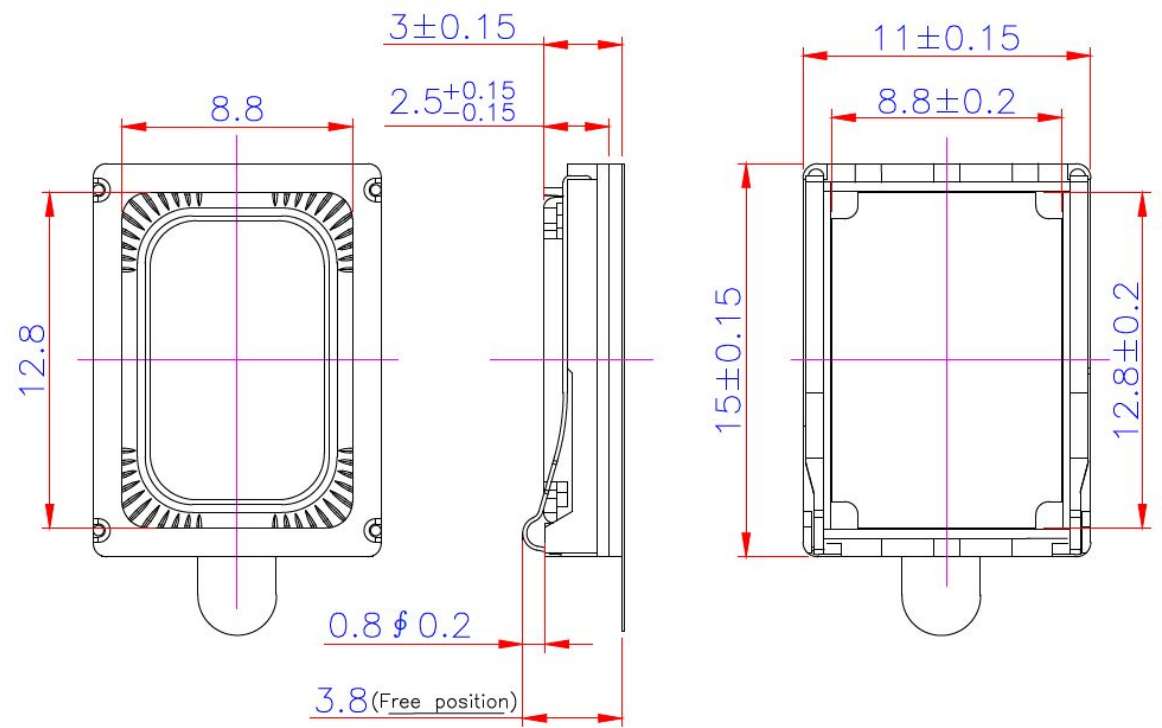

Pad Layout

No.	Part Name	Material	Quantity
1	Yoke	Iron	1
2	Magnet	Nd Fe B	1
3	Plate	Iron	1
4	Spring Terminal	SUS	2
5	Frame	PPA	1
6	Voice Coil	Copper	1
7	Diaphragm	PEEK	1
8	Cap	PPA	1
9	PAD	PE	1



soberton inc.

SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-1511S-1



Release | Revision: B/2018

CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

Page 1

Speaker Electroacoustic Characteristics

General Specifications

Page 2

Frequency Measuring Circuit (Receiver Mode)

Typical Frequency Response Curve (Speaker Mode)

Test Climatic Conditions

Page 3

Reliability Tests

Page 4

Heat Shock Test

Temp. Cycle Test

Page 5

Dimensions

Page 6

Packing

Packing

