MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING
10BS161

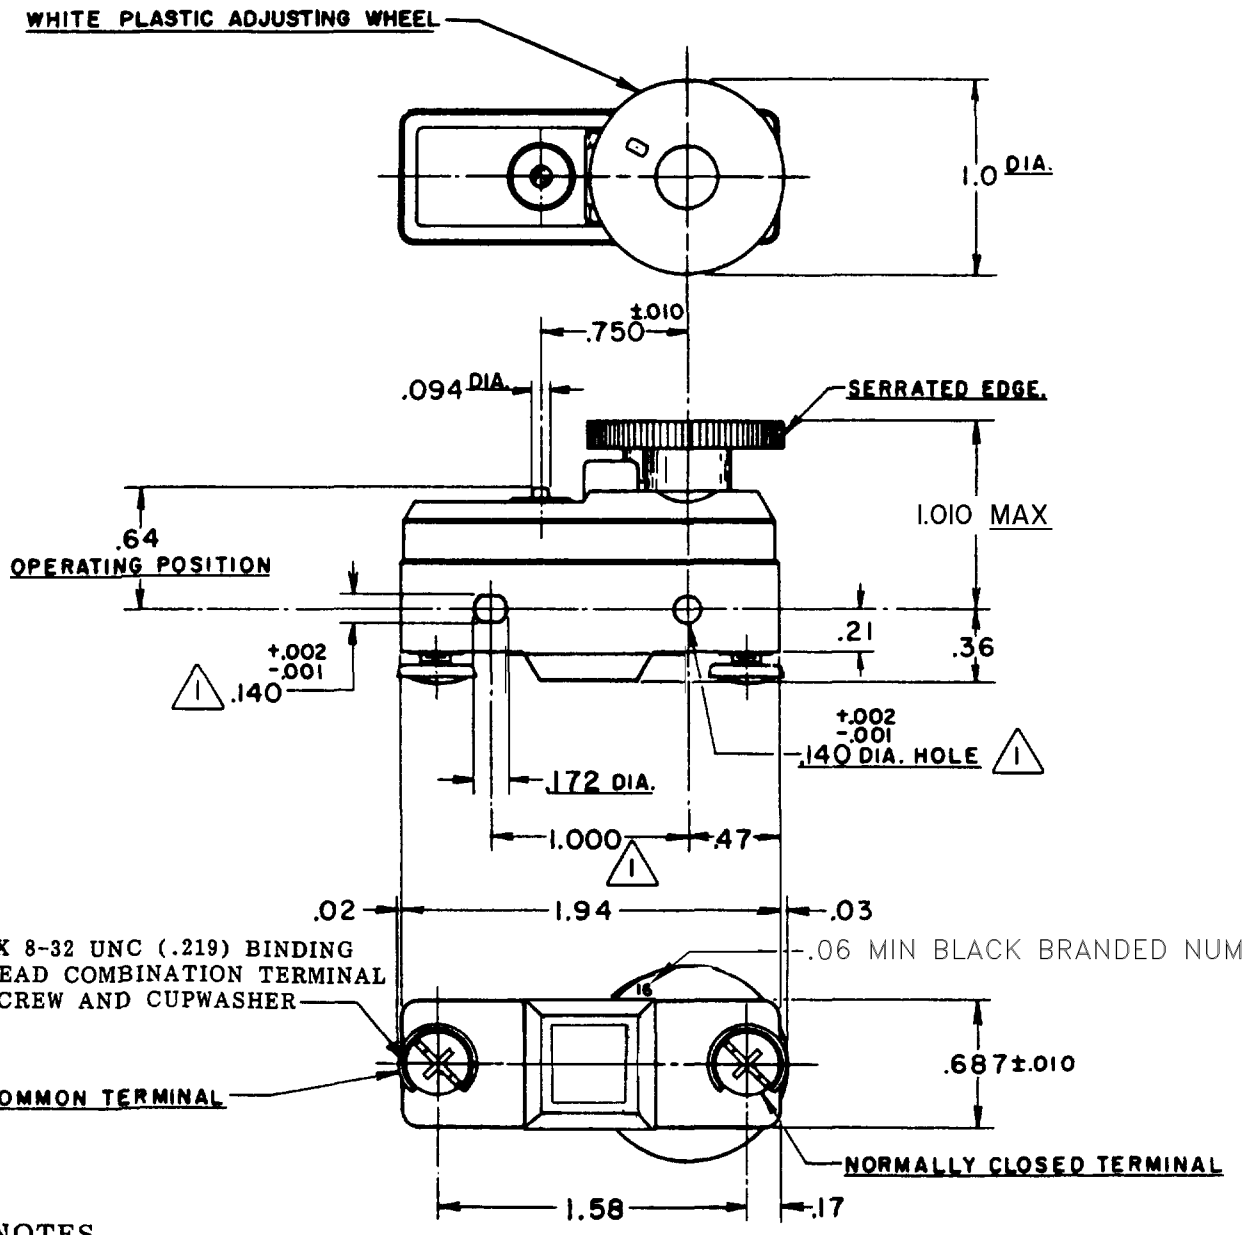

NOTES

1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 CENTERS
2. MINNEAPOLIS-HONEYWELL REGULATOR CO. PART NO. "130914" BRANDED ON BOTTOM OF SWITCH
3. DIAL WHEEL IS SHOWN AT THE MAX SETTING OF BREAK DISTANCE
4. DIAL WHEEL ROTATION 300°

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS (AT MIN SETTING)	ELECTRICAL DATA	SCALE FULL — DO NOT SCALE PRINT
AT MIN SETTING OPERATING FORCE – – – – – – – 17–22 OZ RELEASE FORCE – – – – – – – 14 OZ MIN DIFFERENTIAL TRAVEL – – – – .0025 – .0035 OVERTRAVEL – – – – – – – – .014 MIN AT MAX SETTING DIFFERENTIAL TRAVEL – – – – – .007 MIN	CONTACT ARRANGEMENT SPNC	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ± WEIGHT

CATALOG LISTING 10BS161 PAGE 1 OF 1
RELEASE NO. PR-18724 REPLACES
ISSUE 9

REVISIONS

A	CO-81165						
GJW 13 JULY 95							

DRAWN	CHECK	CHECK	CHECK	CHECK
GJW 13 JULY 95		WJC 13 JUL 95		

FORMTEK