




PART NO.

**RFU-601-4**


REV	DESCRIPTION	DWN	DATE	APPROVED
C	UPDATED DWG FORMAT & SPECS	CZS	06/03/19	JDMc

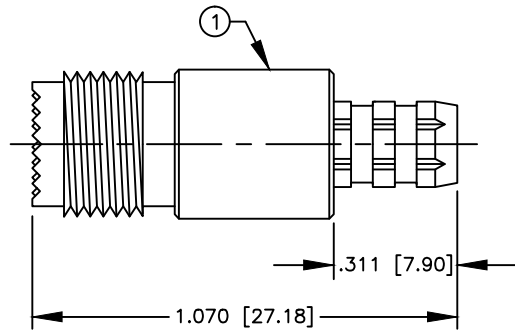

RECOMMENDED CRIMP DIE: .068"



RECOMMENDED CRIMP DIE: .255"

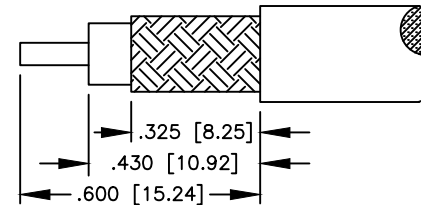

RECOMMENDED STRIPPING DIMENSIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-2.5 GHz

WORKING VOLTAGE: 335 V rms Max. @ Sea Level

INSULATION RESISTANCE: 5k M Ohms min.

TEMPERATURE RANGE: -65°C TO 165°C

FOR RG-8/X, BELDEN 9258, MAXRAD M8X-100 &amp;

M8X-1000, MICRO 8/U, REMEE 1600, SAXTON 8315,

TIMES LMR-240 &amp; LMR-240 ULTRAFLEX CABLE

5	FERRULE	1	BRASS	NICKEL
4	PRESS FIT WASHER	1	BRASS	NICKEL
3	CONTACT	1	BRASS	SILVER
2	INSULATOR	1	DELTRIN	---
1	BODY	1	BRASS	NICKEL
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER  
OUTLINE DRAWINGALL DIMENSIONS  
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
AND [MILLIMETERS]DRAWN  
C. ZUNIGA 06/03/19

CHECKED

ORJ DRAWN  
K. MAXWELL 1/29/96**RoHS  
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL  
THIS DRAWING CONTAINS  
INFORMATION PROPRIETARY TO  
RF INDUSTRIES. ANY  
UNAUTHORIZED USE OF THIS  
DRAWING IS EXPRESSLY  
PROHIBITED WITHOUT WRITTEN  
PERMISSION FROM RF  
INDUSTRIES. ANY VIOLATION IS  
PUNISHABLE UNDER U.S.  
COPYRIGHT LAWS.

**RFconnectors**

DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

RFINDUSTRIES.COM  
7610 MIRAMAR RD.  
SAN DIEGO, CA 92126  
(858) 549-6340**MINI UHF FEMALE  
CRIMP**

CABLE GROUP	DWG #	REVISION
X	<b>RFU-601-4</b>	C
FORMAT	SCALE	CONTROL #
A	NTS	000000
SHEET 1 OF 1		