

In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO	
PCK	

△	▽	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△											
△											

**SPECIFICATIONS**

<b>APPLICATION STANDARD</b>											
<b>OPERATING TEMPERATURE RANGE</b>	-55 °C TO 85 °C						<b>STORAGE TEMPERATURE RANGE</b>	-10 °C TO 60 °C			
<b>VOLTAGE</b>	AC 50 V						<b>OPERATING HUMIDITY RANGE</b>	RELATIVE HUMIDITY : 95 % MAX (NO DEW CONDENSATION IS PERMITTED)			
<b>CURRENT</b>	0.3 A										

**TEST METHOD**


**REQUIREMENT**

Q/TAT

ITEM	TEST METHOD	REQUIREMENT	Q	T	A
<b>CONSTRUCTION</b>	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING	X	X	X
<b>GENERAL EXAMINATION</b>	CONFIRMED VISUALLY.		X	X	X
<b>MARKING</b>			X	X	X
<b>ELECTRICAL CHARACTERISTICS</b>					
<b>CONTACT RESISTANCE</b>	100 mA (DC OR 1000 Hz).	70 mΩ MAX.	X	X	X
<b>INSULATION RESISTANCE</b>	100 V DC.	100 MΩ MIN.	X	X	X
<b>VOLTAGE PROOF</b>	150 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	X	X	X
<b>MECHANICAL CHARACTERISTICS</b>					
<b>INSERTION AND WITHDRAWAL FORCES</b>	MEASURED BY APPLICABLE CONNECTOR.	INSERTION FORCE: 48 N MAX. WITHDRAWAL FORCE: 2 N MIN.	X	X	X
<b>MECHANICAL OPERATION</b>	50 TIMES INSERTION AND EXTRactions.	1) CONTACT RESISTANCE: 80 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X	X	X
<b>VIBRATION</b>	FREQUENCY: 10 TO 55 Hz, SINGLE AMPLITUDE: 0.75 mm, m/s <sup>2</sup> AT 10 CYCLES FOR 3 DIRECTIONS.	1) NO ELECTRICAL DISCONTINUITY OF 1 μs MIN. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X	X	X
<b>SHOCK</b>	490 m/s <sup>2</sup> DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.		X	X	X

**ENVIRONMENTAL CHARACTERISTICS**

<b>DAMP HEAT (STEADY STATE)</b>	EXPOSED AT 40±2 °C. 90~95 %. 96 h.	1) CONTACT RESISTANCE: 80 mΩ MAX. 2) INSULATION RESISTANCE: 100 MΩ MIN. 3) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X	X	X
<b>RAPID CHAGE OF TEMPERATURE</b>	TEMPERATURE -55→-15~35→ 85→15~35°C TIME 30→ 2~ 3→ 30→ 2~ 3 min. UNDER 5 CYCLES.		X	X	X
<b>DRY HEAT</b>	EXPOSED AT 85 °C. 96 h.	1) CONTACT RESISTANCE: 80 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X	X	X
<b>COLD</b>	EXPOSED AT -55 °C. 96 h.		X	X	X
<b>CORROSION SALT MIST</b>	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.	NO HEAVY CORROSION.	X	X	X
<b>SULPHUR DIOXIDE</b>	EXPOSED IN 10 PPM FOR 96 h. (TEST STANDARD: JIS C 0090)	1) CONTACT RESISTANCE: 80 mΩ MAX. 2) NO HEAVY CORROSION.	X	X	X
<b>RESISTANCE TO SOLDERING HEAT</b>	REFLOW : RECOMMENDED TEMPERATURE PROFILE	NO MELTING OF RESIN WHICH AFFECTS THE PERFORMANCE OF COMPONENT.	X	X	X

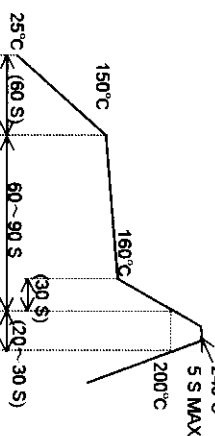

<b>SOLDERABILITY</b>	TO BE TESTED UNDER THE ABOVE CONDITIONS. SOLDERED AT SOLDER TEMPERATURE, 235 °C FOR IMMERSION DURATION, 2 s.	NO PINHOLE OR DEWETTING ON SOLDERED SURFACE.	X	X	X
----------------------	---	--	---	---	---

<b>REMARKS</b>					
----------------	--	--	--	--	--

UNLESS OTHERWISE SPECIFIED, REFER TO JIS C 5402.	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
NOTE Q.T. QUALIFICATION TEST AT ASSURANCE TEST X: APPLICABLE TEST	<i>M. Nakamura</i>	<i>M. Nakamura</i>	<i>H. Okawa</i>	<i>H. Yoshimura</i>	
	00.06.20	0008.20	00.06.21	00.06.23	

**HRS** HIROSE ELECTRIC CO., LTD. **SPECIFICATION SHEET** PART NO. **FX11B - 80P - SV0.5 (21)**

CODE NO.(OLD)	DRAWING NO.	CODE NO.	1
CL	ELC4 - 152631 - 01	CL 573 - 0658 - 9 - 21	1