


3 LEAD BICOLOR T-1 3/4 (5 mm) SOLID STATE LAMPS


PACKAGE DIMENSIONS

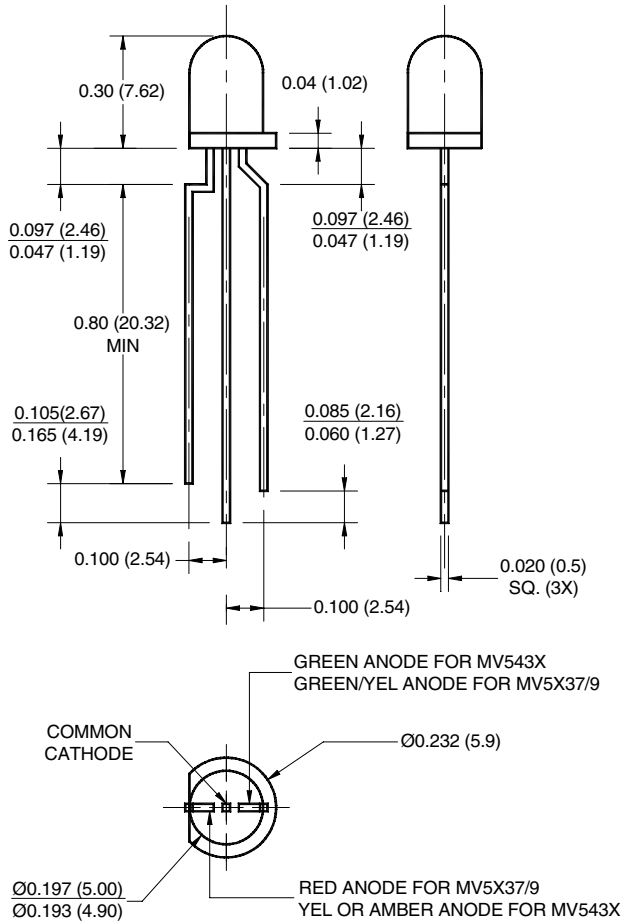

NOTES:

1. Dimensions for all drawings are in inches (mm).
2. Tolerance is $\pm 0.12''$ unless otherwise specified.

GREEN / YELLOW	MV5433
GREEN / ORANGE	MV5438
YELLOW / HER	MV5337
GREEN / HER	MV5437
GREEN / AlGaAs RED	MV5439



FEATURES

- Popular T-1 3/4 package
- Wide viewing angle
- Solid state reliability
- TTL compatible

DESCRIPTION

The MV5X3X T-1 3/4 (5 mm) lamp is a three-lead bicolor light source with a central common cathode lead. Each lamp comes with a white diffused lens and has a 100° viewing angle.

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	AlGaAs RED	HER	Green	Yellow	Orange	Units
Continuous Forward Current (I_F)	30	30	30	20	30	mA
Peak Forward Current (I_F) ($f = 1.0$ KHz, Duty Factor = 1/10)	90	90	90	60	90	mA
Power Dissipation (P_D)	120	120	120	85	100	mW
Reverse Voltage (V_R)	5	5	5	5	5	V
Operating Temperature (T_{OPR})	-55 to +100					$^\circ\text{C}$
Storage Temperature (T_{STG})	-55 to +100					$^\circ\text{C}$
Lead Soldering Time (T_{SOL})	260 for 5 sec					$^\circ\text{C}$

GREEN / YELLOW	MV5433
GREEN / ORANGE	MV5438
YELLOW / HER	MV5337
GREEN / HER	MV5437
GREEN / AlGaAs RED	MV5439

ELECTRICAL / OPTICAL CHARACTERISTICS (T_A = 25°C)

Part Number	MV5437 Grn/HER	MV5337 Yel/HER	MV5433 Grn/Yel	MV5438 Grn/Orange	MV5439 Grn/AlGaAs Red	Condition
Luminous Intensity (mcd)						I _F = 20 mA
Minimum	2/2	2/2	2/2	2/2	2/10	
Typical	6/6	6/6	6/6	6/6	6/25	
Forward Voltage (V)						I _F = 20 mA
Maximum	3.0/3.0	3.0/3.0	3.0/3.0	3.0/3.0	3.0/2.4	
Typical	2.1/2.1	2.1/2.1	2.3/2.3	2.3/2.3	2.3/1.7	
Peak Wavelength (nm)	565/635	585/635	565/585	565/610	565/660	I _F = 20 mA
Spectral Line Half Width (nm)	30/45	35/45	30/35	30/40	30/20	I _F = 20 mA
Viewing Angle (°)	100°	100°	100°	100°	100°	I _F = 20 mA

TYPICAL PERFORMANCE CURVES

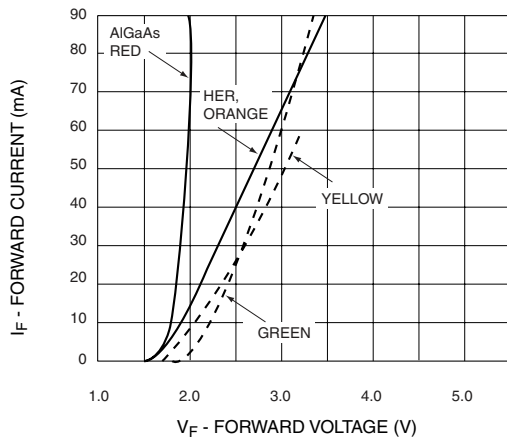


Fig. 1 Forward Current vs. Forward Voltage

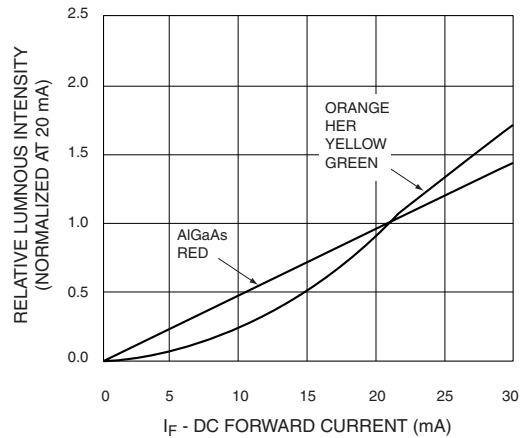


Fig. 2 Relative Luminous Intensity vs. DC Forward Current

3 LEAD BICOLOR T-1 3/4 (5 mm) SOLID STATE LAMPS

GREEN / YELLOW	MV5433
GREEN / ORANGE	MV5438
YELLOW / HER	MV5337
GREEN / HER	MV5437
GREEN / AlGaAs RED	MV5439

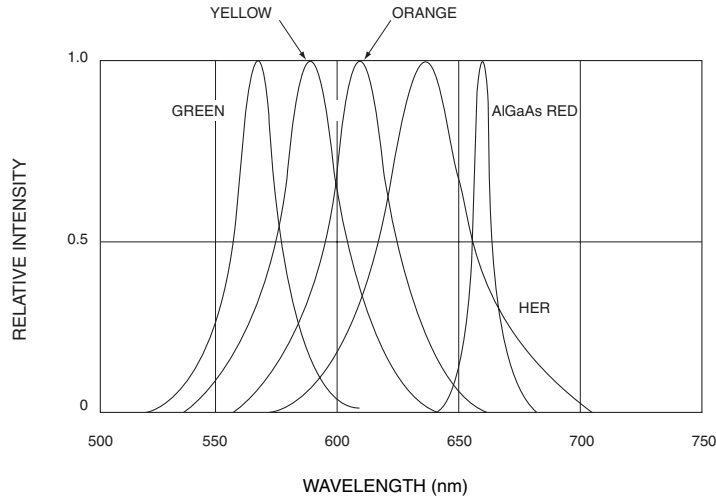


Fig. 3 Relative Intensity vs. Peak Wavelength

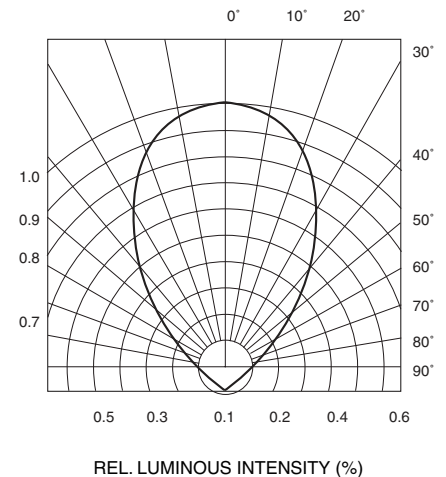


Fig. 4 Radiation Diagram

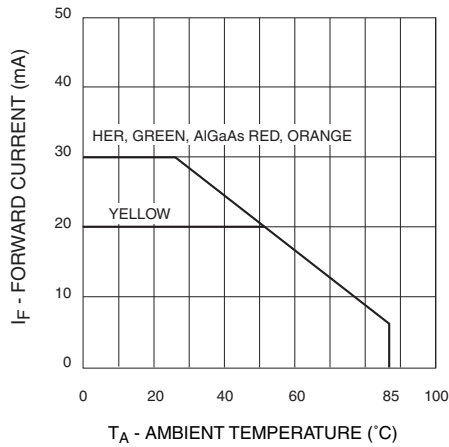


Fig. 5 Current Derating Curve

GREEN / YELLOW	MV5433
GREEN / ORANGE	MV5438
YELLOW / HER	MV5337
GREEN / HER	MV5437
GREEN / AlGaAs RED	MV5439

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Fairchild Semiconductor

SEARCH | [Parametric](#) | [Cross Reference](#) [Product Folders and](#) [Applies](#)

find products

[Home >>](#) [Find products >>](#)[Products groups](#)[Analog and Mixed](#)[Signal](#)[Discrete](#)[Interface](#)[Logic](#)[Microcontrollers](#)[Non-Volatile](#)[Memory](#)[Optoelectronics](#)[Markets and applications](#)[New products](#)[Product selection and parametric search](#)[Cross-reference search](#)

MV5437

Green/High Efficiency Red 3 Lead Bicolor T-1 3/4 (5 mm) Solid State Lamps

Contents

[General description](#) | [Features](#) | [Testing conditions](#) | [Additional information](#) | [Product status/pricing/packaging](#)

General description

The MV5X3X T-1 3/4 (5 mm) lamp is a three-lead bicolor light source with a central common cathode lead. Each lamp comes with a white diffused lens and has a 100° viewing angle.

Datasheet

[Download this datasheet](#)[PDF](#)[e-mail this datasheet](#)[\[E-\]](#)

This page

[Print version](#)

Related Links

[Request samples](#)[Dotted line](#)[How to order products](#)[Dotted line](#)[Product Change Notices \(PCNs\)](#)[Dotted line](#)[Support](#)[Dotted line](#)[Distributor and field sales representatives](#)[Dotted line](#)[Quality and reliability](#)[Dotted line](#)[Design tools](#)[technical information](#)[buy products](#)[technical support](#)[my Fairchild](#)[company](#)[back to top](#)

Features

- Popular T-1 3/4 package
- Wide viewing angle
- Solid state reliability
- TTL compatible

[back to top](#)

Testing conditions

- $V_F @ I_F = 20 \text{ mA}$; $I_V @ I_F = 20 \text{ mA}$

[back to top](#)

Additional information

- HER = High Efficiency Red

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Packing method
MV5437	Full Production	\$0.089	T-1 3/4	BULK
MV5437.MP12	Full Production	N/A	T-1 3/4	BULK
MV5437.A6R0	Full Production	\$0.096	T-1 3/4	TAPE REEL
MV5437.A6A0	Full Production	\$0.096	T-1 3/4	AMMO

* 1,000 piece Budgetary Pricing

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) | [Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor