



Electrical specifications

Passband: 0-150 MHz
Insertion Loss: ≤ 0.5 dB
Return Loss @ Passband: ≤ 15 dB
Rejection: >50 dB@300-1000 MHz
Power Handling: 200 W

Mechanical


Connectors: N-Type (F)
Dimensions: 6" x 2" x 1.5" in

Environmental

Operating Temperature: -40°C to +85°C

This product is RoHS compliant.

Outline Drawing:

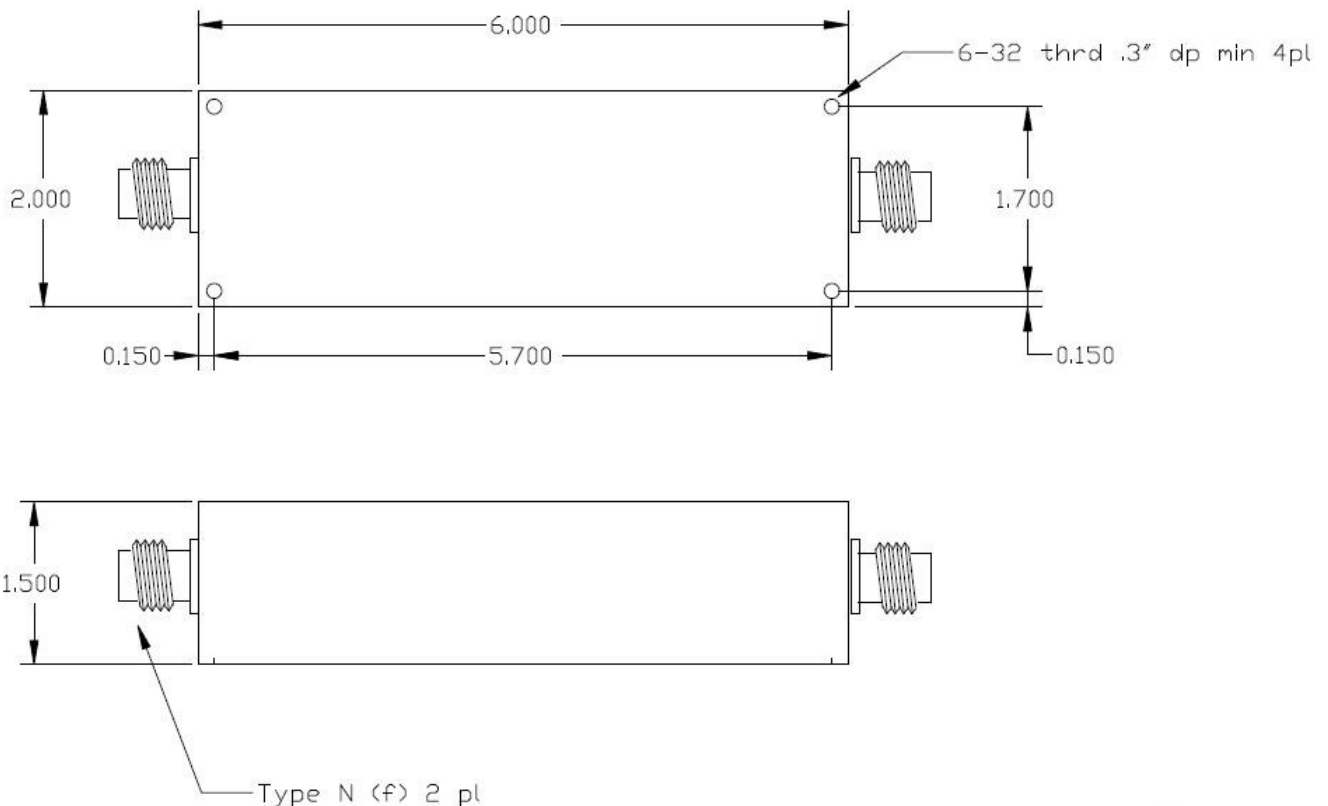



Response Plot:

