

6

5

4



3

2

1

PART NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300480195	E11B03015M002	7.87' +0.75'/-0' [ 0.2M +19.1/-0 mm ]

AUX VIEW  
SCALE 1:4

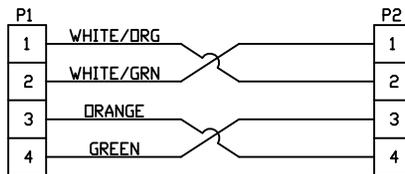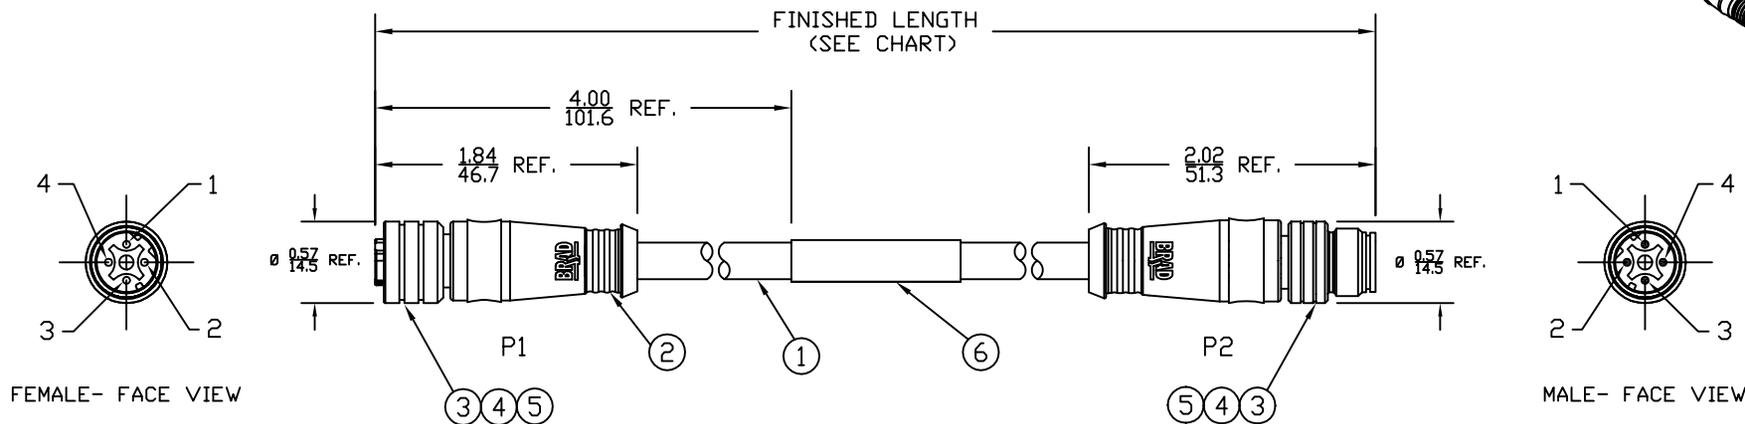

WIRING DIAGRAM

NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) CABLE: #26/4 SHIELDED PVC
- 4) ELECTRICAL DATA:  
ACCORDING TO CAT5e ETHERNET STANDARD  
MAX. VOLTAGE: 30V  
MAX. CURRENT 1.5A
- 5) ENVIRONMENTAL:  
PROTECTION IP67  
TEMPERATURE RANGE: -20°C TO 75°C
- 6) WRAP LABEL IS MARKED WITH P/N, DATE CODE,  
VOLTAGE & AMPERAGE.
- 7) ASSEMBLY IS RoHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	1	LABEL	PLASTIC FILM	BLACK/YELLOW
5	2	INSERT	PUR	BLACK
4	8	PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	2	M12 COUPLING NUT	BRASS	NICKEL
2	2	OVERMOLD	PUR	BLACK
1	1	ETHERNET CABLE-CAT5E	PVC JACKET	TEAL

SD RELEASE EC NO: MEL2010-0005 DRWN: VOU CHKD: BWOODMAN APPR: JFMURPHY 2009/07/20	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0 ∇=0	mm	INCH	IN/MM	3:4	INCH	
		4 PLACES ±----	±----	DRAWN BY	DATE	TITLE	
		3 PLACES ±----	±.005	VOU	2009/07/06	MICRO-CHANGE CABLE ASSY 4P M/MFE ST/ST CROSSOVER #26/4 SHIELDED PVC	
	2 PLACES ±----	±.010	CHECKED BY	DATE	MOLEX INCORPORATED		
	1 PLACE ±----	±.020	BWOODMAN	2009/07/31	DOCUMENT NO. SD-120108-028		
		ANGULAR ±1/2°	APPROVED BY	DATE	SHEET NO. 1 OF 1		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			SIZE				
			A				

6

5

4

3

2

1