

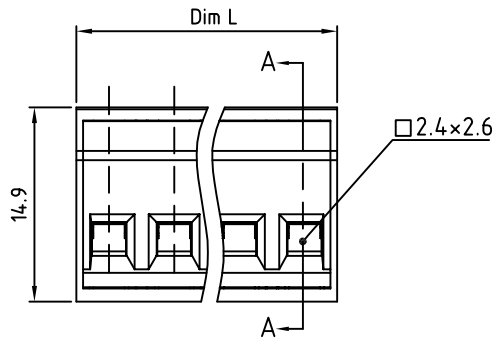


SIGN	DATE	DESCRIPTION	APPROVER
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

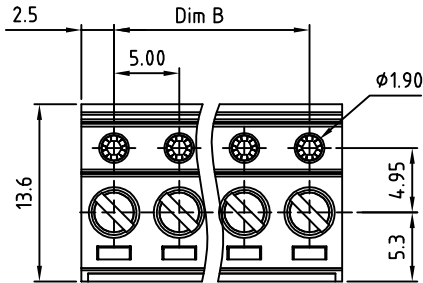

N=Number of poles



SECTION A-A

Material

- Insulating body Thermoplastic (UL94V-0)
- Insulating cover Thermoplastic (UL94V-0)
- Terminal screw Steel Zinc plating M3
- Terminal body(house) Brass, Ni plated
- Wire guard PhBz , Tin plated

Electrical

- Voltage rating: 300V
- Current rating: 15A
- Wire range:
 - Solid wire(AWG): 12-28
 - Stranded wire(AWG): 12-28
- Torque: 4.5Lb-In
- Screw: M3
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: us

RoHS Compliant

PART NUMBER:

OSTEOXX0102

- No. of Poles
- 02 2 Poles
 - 03 3 Poles
 -
 - 124 12 Poles

- COLOR
- 0: Black (Standard)
 - 5: Green
 - 6: Blue
 - 8: Grey

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

Dim L=N×5.0
Dim B=(N-1)×5.0

Poles	02	03	04	05	06	07	08	09	10	11	12	
Dim L	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	
Dim B	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	
TOL	±0.10				±0.15				±0.20			



TITLE		OSTEO 5.0 series (A type 1.90mm)									
PART NO.		OSTEOXX0102				DWG NO.		OSTEOXX0102.DWG			
APPROVED		CHECKED	DESIGNED	DRAWN		CUST NO.		Tolerance			
 Jacke 2009.02.23		 Jacke 2009.02.23	 Jacke 2009.02.23	 Jacke 2009.02.23	 Jacke 2009.02.23	 Jacke 2009.02.23	 Jacke 2009.02.23	 Jacke 2009.02.23	UNIT: mm	X. ±0.50	
									SCALE: NONE	X.X ±0.30	
SHEET: 01/01		REV: B	X.XX ±0.10		X° ±1°						