


COIL: @ 25° C	
RESISTANCE	675 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.47 VDC

CUSTOMER DATA SHEET

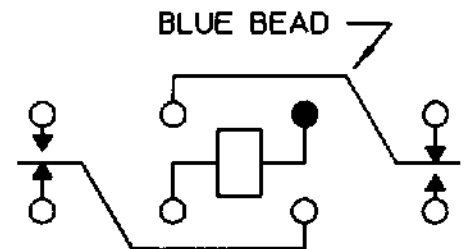

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

CONTACT RATING: LOW LEVEL TO 3 AMPS
RESISTIVE 28 VDC 100,000 OPERATIONS

NOTES: OPERATE & RELEASE TIME 5 MS MAX.
CONTACT BOUNCE 2 MS MAX.

DR. R.B. 6/3/94 CK. 6/3/94



CUST. C.I.I. STD.
CUST. NO.

TYPE 'FW' RELAY

FW1109G00