

ITEM	MOLEX P/N	DESCRIPTION	QTY	UOM
A,B	436450600	MicroFit 3.0 Receptacle Sgl Row 6Ckt	2	PC
C	430300001	MicroFit 3.0 F Crp Term Chn Tin 20-24	12	PC
D	--	RESIN TPE NAT SANTOPRENE	A/R	KG
E	--	MOLD PART INNER CAP	4	PC
F	--	MASTER BATCH BLACK COLOR	A/R	KG

FROM	TO	CABLE DESCRIPTION	COLOR
A1	B1	6CX20AWG UNSHD BK UL2464	RED
A2	B2		YELLOW
A3	B3		BLUE
A4	B4		GREEN
A5	B5		WHITE
A6	B6		BLACK

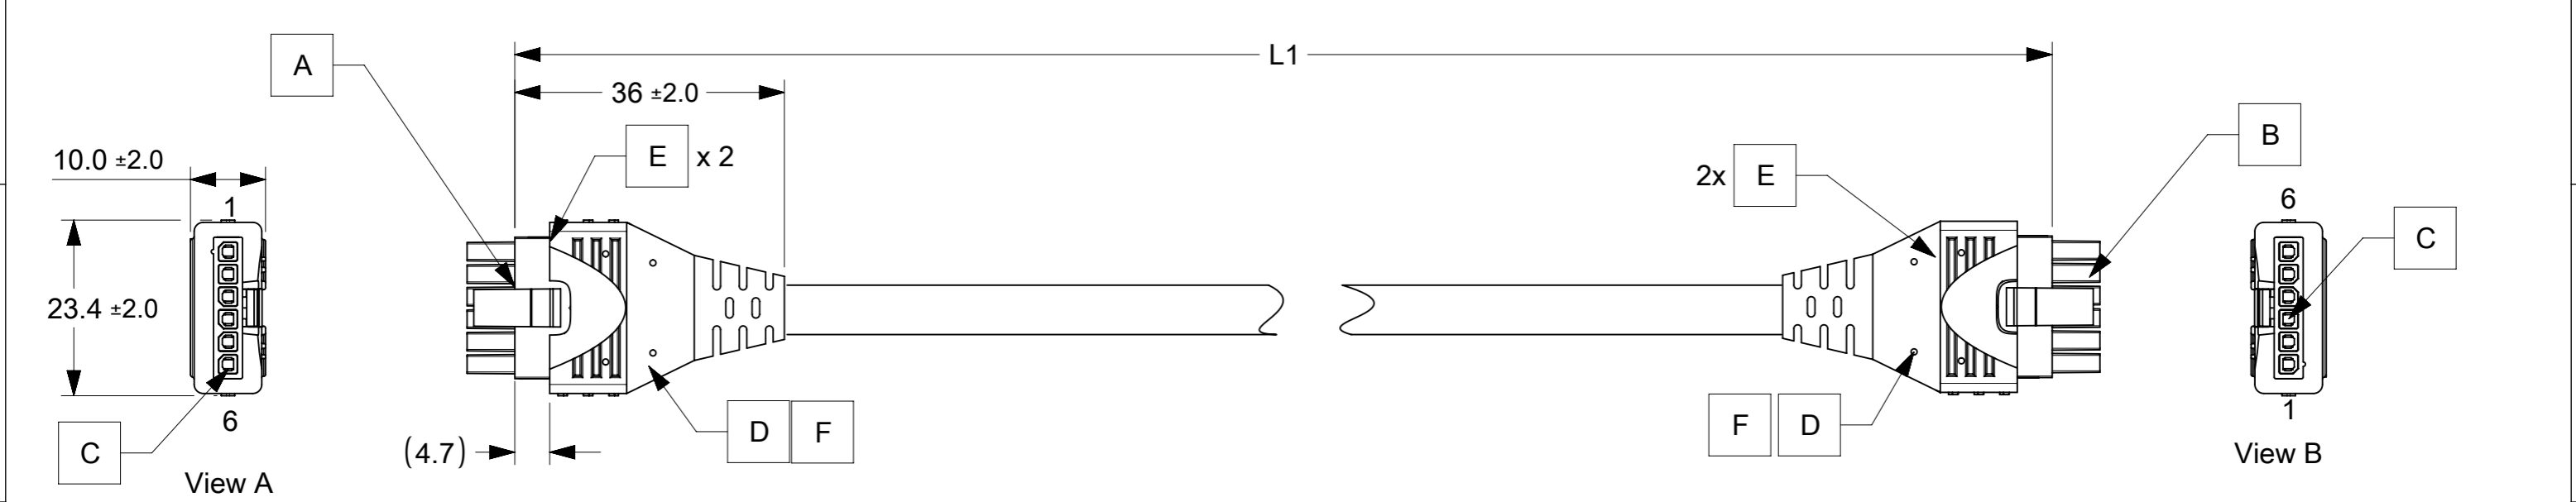


TABLE		
PART NUMBER	DESCRIPTION	L1
2147700605	6CKT OVERMOLDED MICROFIT CABLE 500MM	500±10
2147700610	6CKT OVERMOLDED MICROFIT CABLE 1M	1000±20
2147700620	6CKT OVERMOLDED MICROFIT CABLE 2M	2000±25
2147700630	6CKT OVERMOLDED MICROFIT CABLE 3M	3000±30

NOTES:

- MOLDING MATERIAL:
 - INNERCAP: PA66 NYLON RESIN.
 - OVERMOLD: SANTOPRENE TPE RESIN & MASTER BATCH BLACK.
- ELECTRICAL PERFORMANCE:
 - VOLTAGE RATING: 300V AC.
 - THIS PRODUCT MUST PASS 100% CONTINUITY TEST PER MOLEX ES-36586-004.
 - DIELECTRONIC STRENGTH: 500V DC/0.01 SEC.
 - INSULATION RESISTANCE: 20M OHMS
- CONNECTOR VIEWS ARE SHOWN FROM MATING SIDE.
- MECHANICAL PERFORMANCE:
 - CABLE HARNESS SHOULD WITHSTAND AN AXIAL FORCE OF 5KGF FOR ONE MINUTE BETWEEN OVERMOLD AND CONNECTOR WITHOUT PHYSICAL DAMAGE.
 - OVERMOLD SIDE CAN PASS THE BENDING TEST IN 100 CYCLES AT EACH OF 2 PLANES, PER EIA364-41 CONDITION I.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC:		molex																								
	<table border="1"> <tr> <th>DIMENSION UNITS</th> <th>SCALE</th> </tr> <tr> <td>mm</td> <td>NTS</td> </tr> </table>	DIMENSION UNITS	SCALE		mm	NTS	<table border="1"> <tr> <td>EC NO: 662516</td> <td>2021/04/30</td> </tr> <tr> <td>DRWN: SBS04</td> <td>2021/05/10</td> </tr> <tr> <td>CHK'D: MNARAYAN01</td> <td>2021/05/10</td> </tr> <tr> <td>APPR: MNARAYAN01</td> <td>2021/05/10</td> </tr> </table>		EC NO: 662516	2021/04/30	DRWN: SBS04	2021/05/10	CHK'D: MNARAYAN01	2021/05/10	APPR: MNARAYAN01	2021/05/10	SEE TABLE											
DIMENSION UNITS	SCALE																											
mm	NTS																											
EC NO: 662516	2021/04/30																											
DRWN: SBS04	2021/05/10																											
CHK'D: MNARAYAN01	2021/05/10																											
APPR: MNARAYAN01	2021/05/10																											
DIVISIONAL SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	INITIAL REVISION:		PRODUCT CUSTOMER DRAWING																								
	<table border="1"> <tr> <td>ANGULAR TOL</td> <td>±</td> <td>*</td> </tr> <tr> <td>4 PLACES</td> <td>±</td> <td></td> </tr> <tr> <td>3 PLACES</td> <td>±</td> <td></td> </tr> <tr> <td>2 PLACES</td> <td>±</td> <td></td> </tr> <tr> <td>1 PLACE</td> <td>±</td> <td></td> </tr> <tr> <td>0 PLACES</td> <td>±</td> <td></td> </tr> </table>	ANGULAR TOL	±	*	4 PLACES	±		3 PLACES	±		2 PLACES	±		1 PLACE	±		0 PLACES	±		<table border="1"> <tr> <td>DRWN: SBS04</td> <td>2021/04/23</td> </tr> <tr> <td>APPR: MNARAYAN01</td> <td>2021/05/10</td> </tr> </table>		DRWN: SBS04	2021/04/23	APPR: MNARAYAN01	2021/05/10	DOCUMENT NUMBER	DOC TYPE	DOC PART
ANGULAR TOL	±	*																										
4 PLACES	±																											
3 PLACES	±																											
2 PLACES	±																											
1 PLACE	±																											
0 PLACES	±																											
DRWN: SBS04	2021/04/23																											
APPR: MNARAYAN01	2021/05/10																											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER																					
			A3-SIZE	214770	2147700605	GENERAL MARKET	1 OF 1																					