

| т | ۵ | п | m | 0 |
|---|---|----------|---|---|
| | | | | |



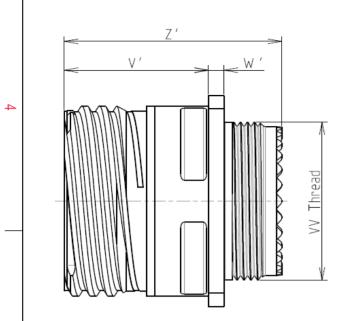



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material | : Composite | | | |
|--|--|--|--|--|
| -Shell Plating | : Olive drab Cadmium | | | |
| -Insulator | : Thermoplastic | | | |
| -Contacts | : Copper Alloy | | | |
| -Seals & Grommet | : Silicon Elastomer | | | |
| -Contact Plating | : Gold over copper Alloy $0.8 \mu m$ minimum | | | |
| -Durability | : 500 Mating cycles | | | |
| -Delivered with Souriau contacts and Accessories | | | | |
| -Temperature Range | _∶ -65°C to +175°C | | | |
| -Salt Spray | : 2000 hours | | | |

: 11.8 g ± 10%

8D 0

G

11

J

02

В

F

А

| Connector dimension | | | |
|---------------------|-------------|--|--|
| Dim | Nominal | | |
| Р | 3.25±0.2 | | |
| PP | 4.93±0.2 | | |
| R1 | 20.62 | | |
| R2 | 18.26 | | |
| S | 26.2±0.3 | | |
| V' | 19.5+1.4/-0 | | |
| W' | 2.1/3.65 | | |
| Z' | 32 Max | | |
| VV THREAD | M15x1-6g | | |


ORIENTATION : A

CONTACT LAYOUT : 11-02

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommend

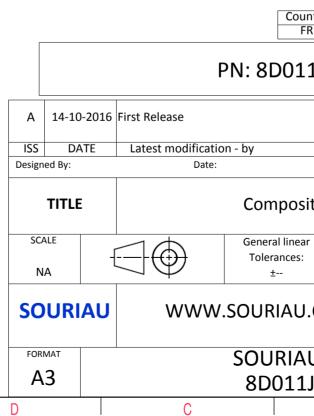

| | σ | | A | | |
|---|---|------------------------------|---|--------|---|
| | | | | | 4 |
| AS EXA | AMPLE | | | | 3 |
| s which er of t indation untry FR | non-conformit th does not co he Parties or to n, technical n Jurisd | mply with by a third part | | | 2 |
| | | CUSTOME | | MOD N° | |
| site | CUSTOMER DRAWING Receptacle 8D series NPRDS / PROJECT | | | | |
| | 859 | | | | 1 |
| J.CC | COM This document is the property of SOURIAU it must not be reproduced or communicated without permission | | | | |
| | DRG N° | | | SHEET | |
| LJO2 | 2BA-C | | | 1/2 | J |
| | В | | А | | |
| | | | | | |

| ſ | Ŧ | ۵ | нт — | m | D | 0 | |
|----------|-------------------------------|--|------|---|--------------------------|---|----------------------|
| | | Contact Layout | | | | Panel | l Cutou |
| 4 | .× .0 (2. | +Y B A B A A A A A A A A A A A A A | | | ~ - | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING | |
| | Shell Arrangement size no. | tion X-axis Y-axis (mm) (mm) +.095 (2.41) +.000 (.00) | | | <u>v</u> | Dim | |
| ω | | | | | | ØA ØAA R1 ØT | |
| | F | | | | | SOURIAU shall not be liable due to a use of the Produ the Specifications issued by ei (professional recomm | icts wh ther of |
| N | | | | | | PN: 8D0 | Countr FR D11. |
| _ | | | | | ISS DATE Designed By: | 16 First Release Latest modification - by Date: | |
| <u> </u> | | | | | SCALE NA | Comp General li Tolerand ± | inear |
| | | | | | FORMAT | J WWW.SOURIA SOUR | |
| | Н | G | F | E | A3 D | 8D01 | |

