
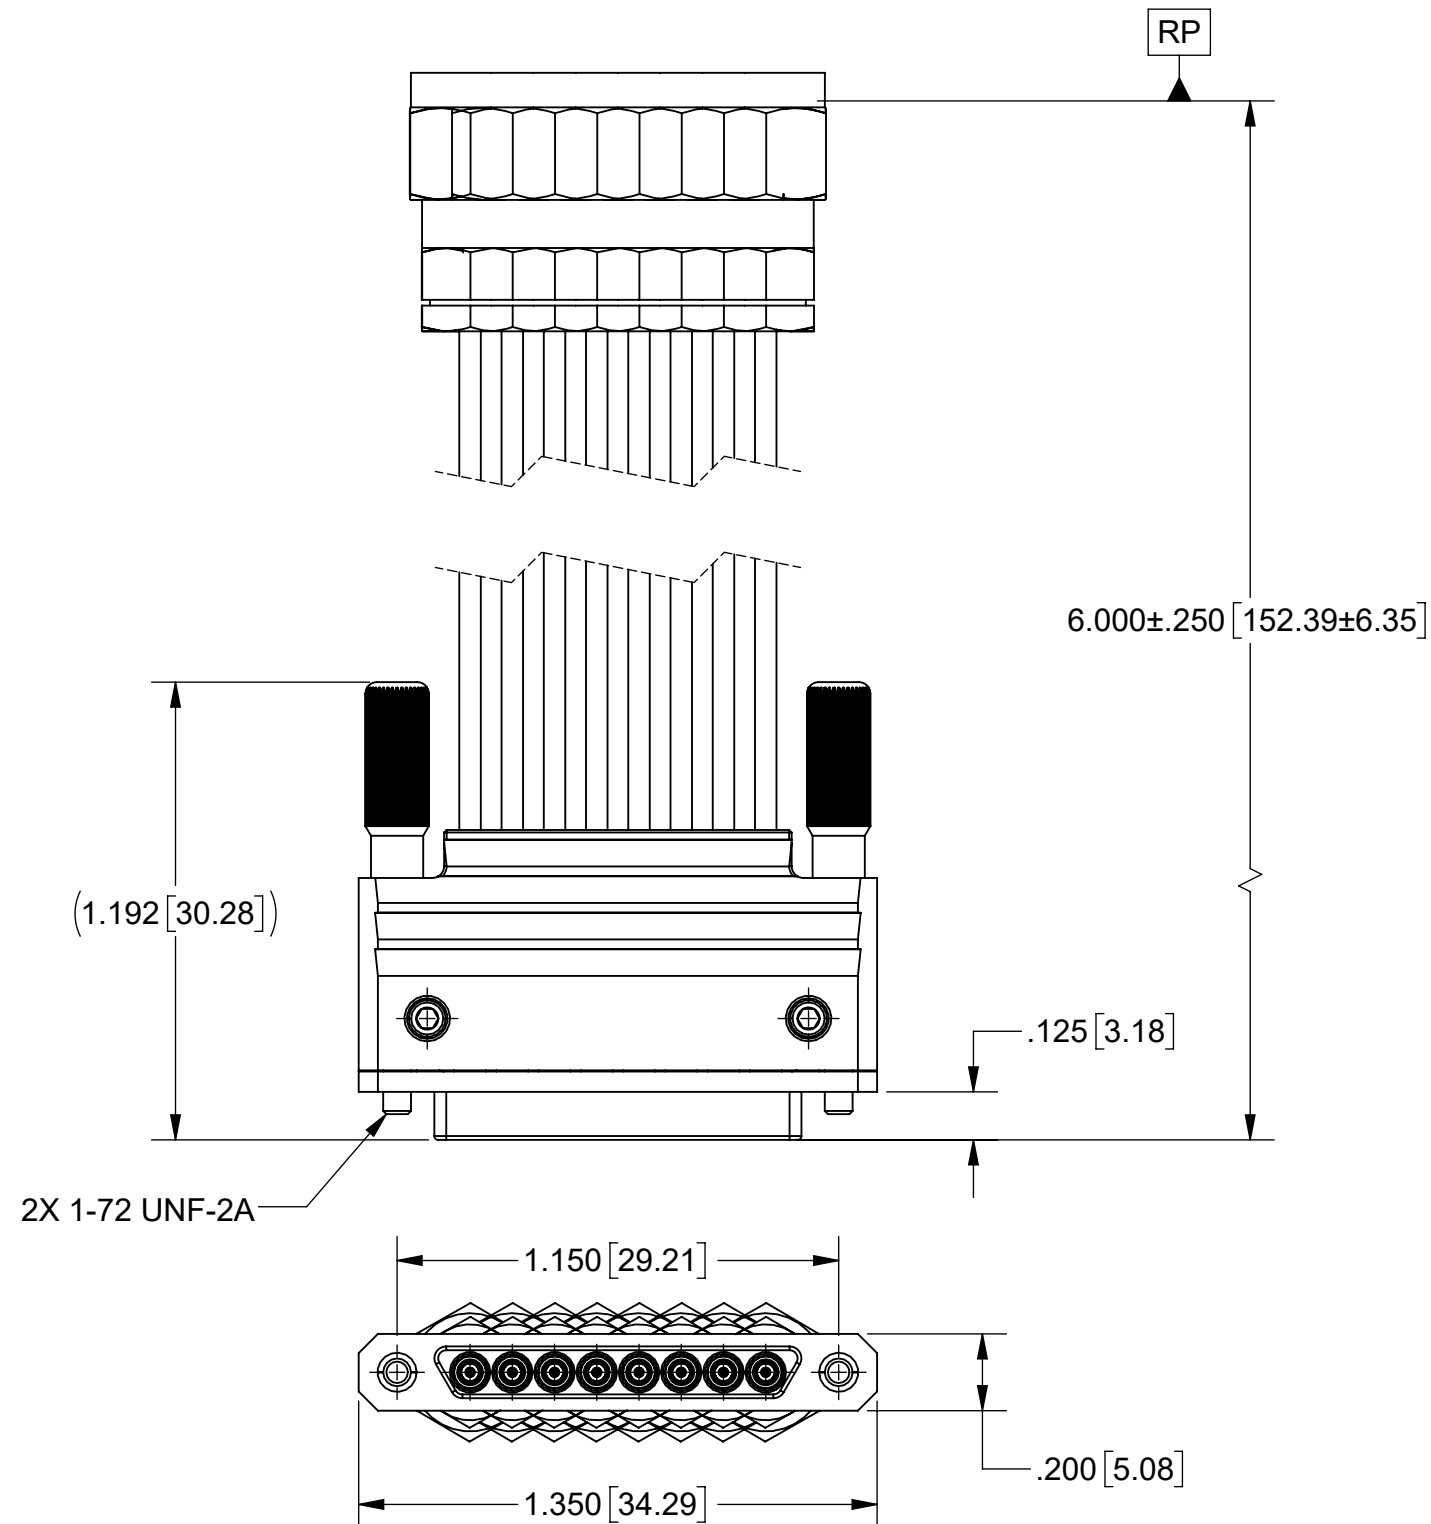


# PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 47236	02/18	DAL
A	DCN 47600	06/18	STW
B	DCN 49344	09/19	STW

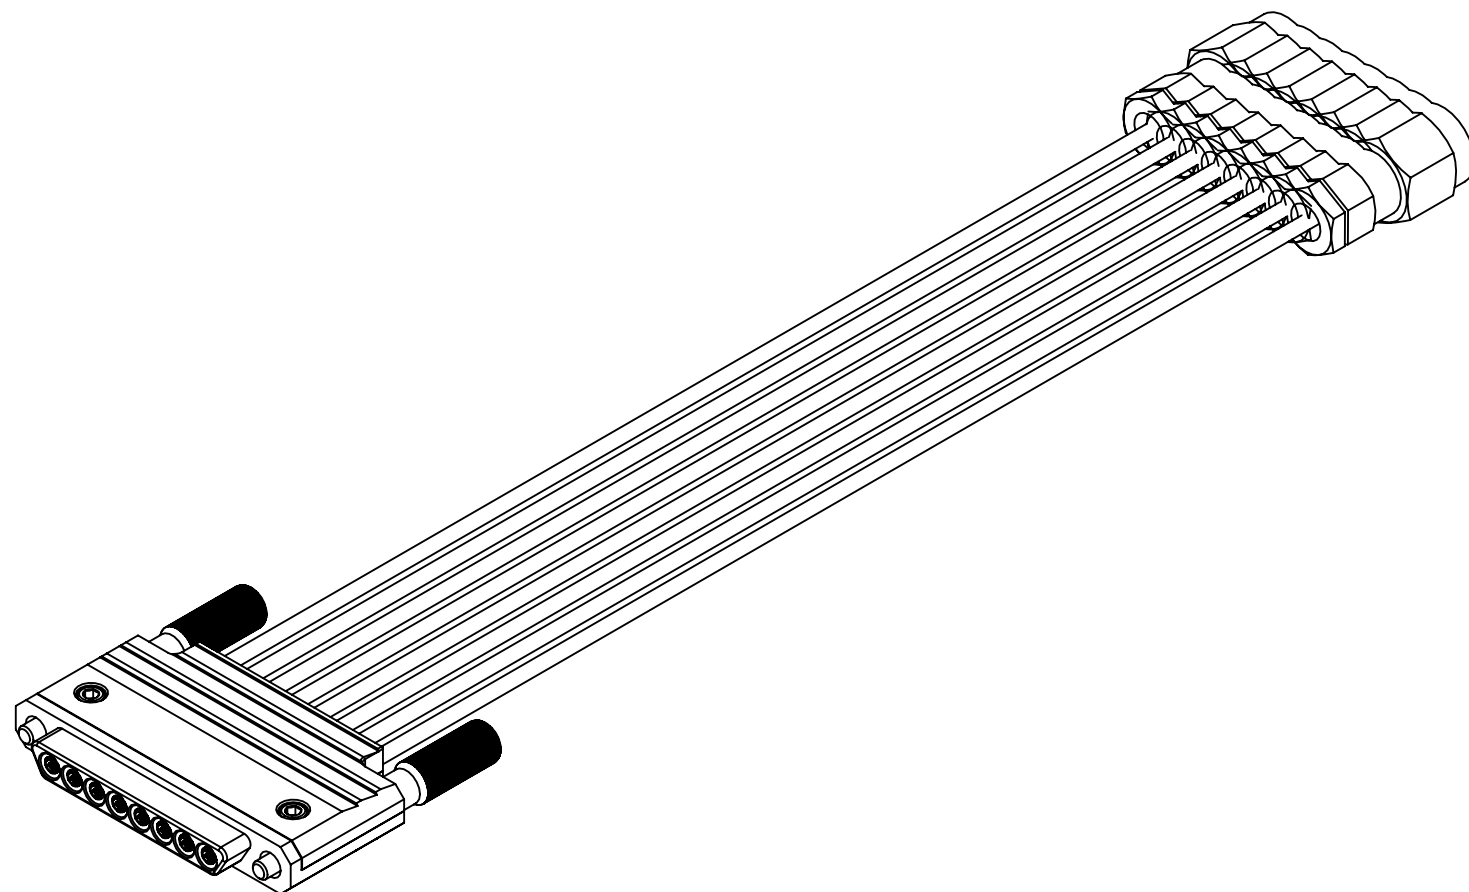

**MATERIAL:**

- MOUNTING SCREWS: STAINLESS STEEL
- D-SUB: ALUMINUM
- CABLE: FLEXIBLE Ø.047
- CONNECTORS: 8X SMPS FEMALE (3821-40032)  
8X MALE 2.92mm (SF1511-60069)

**FINISH:**

- MOUNTING SCREWS: PASSIVATED PER AMS-2700
- D-SUB: ANODIZED CLEAR

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$ X'X' $\pm 15'$	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA: 'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	 www.svmicrowave.com <b>TITLE:</b> 8 PORT MINI-D RF ASSEMBLY WITH 6" Ø.047 CABLES <b>SIZE DWG. NO. B</b> 7038-0211 SCALE: 2:1
FINISH: SEE NOTES	DECIMAL: X $\pm .030$ .XX $\pm .010$ .XXX $\pm .005$	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	
SURFACE AREA: N/A	THIRD ANGLE PROJECTION	DRAWN: JMS 02/26/18 CHECKED: DAL 02/26/18 APPROVED: DAL 02/26/18	SHEET 1 OF 1