


LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.PX00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24A.PX00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24A.PX00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24A.PX00LF

Plating: 4 --> flash Au  
Plating: 6 --> 0.76 μ Au

PC card drilling dimensions(after plating)  
(thickness 1.60±0.20mm)

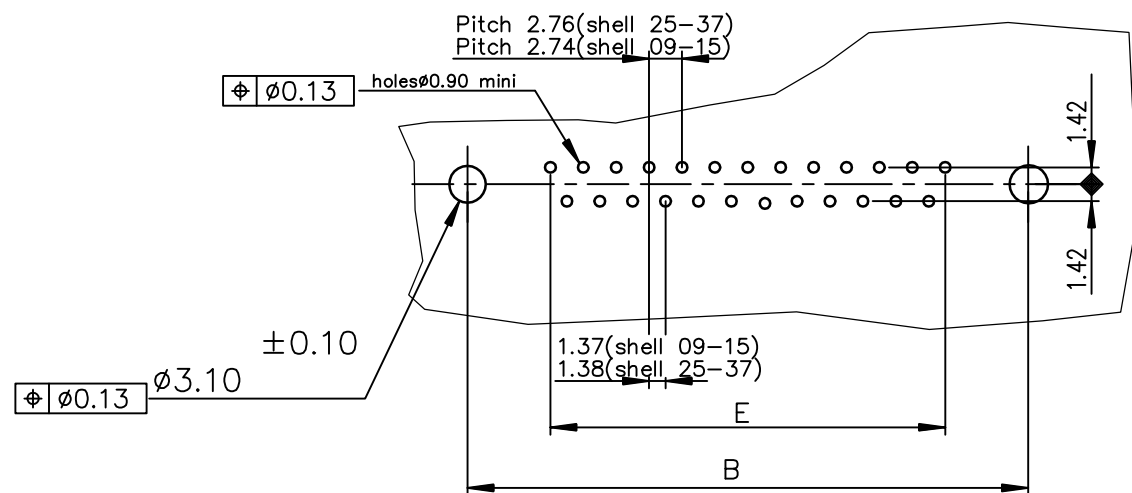

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6.0±0.15 mm.

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0000

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406 ISO 1101				D-SUB	
ltr		ecn no		dr		date		title	
H		ELX-I-22878		AB		2015/01/06		MALE CONNECTOR DELTA-D STRAIGHT - SOLDER TYPE	
								scale 2:1	
								sheet 1 of 1	
								size A3	
								type Product Customer Drawing	
sheet index		revision sheet		H					
		1							