

# 10 x 38mm Ceramic, Fast Acting




## Features

- Photovoltaic / Solar Panel Power Fuses
- RoHS Compliant



**F-10**

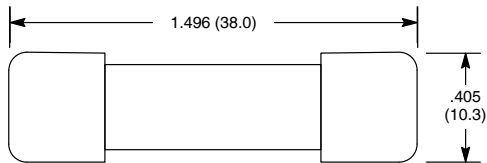

## Specifications

**Rated Voltage:** 1000V, 690V (74-10FC20A **ONLY**)

**Breaking Capacity:** 1000VAC, 50A; 1000VDC, 30A

690VAC, 50A; 690VDC, 30A (74-10FC20A **ONLY**)

### Time Current Characteristics:

| % of Ampere Rating | Opening Time      |                   |
|--------------------|-------------------|-------------------|
|                    | 1A – 5A           | 6A – 20A          |
| 100%               | 4 hours min.      | 4 hours min.      |
| 400%               | 0.003 – 1 seconds | 0.01 – 10 seconds |
| 1000%              | 0.02 seconds max. | 0.03 seconds max. |

### Ordering Information:

| NTE Type No. (Note 1) | Rated Current | Diag No. |
|-----------------------|---------------|----------|
| 74-10FC1A             | 1A            | F-10     |
| 74-10FC2A             | 2A            | F-10     |
| 74-10FC3A             | 3A            | F-10     |
| 74-10FC4A             | 4A            | F-10     |
| 74-10FC5A             | 5A            | F-10     |
| 74-10FC6A             | 6A            | F-10     |
| 74-10FC8A             | 8A            | F-10     |
| 74-10FC10A            | 10A           | F-10     |
| 74-10FC12A            | 12A           | F-10     |
| 74-10FC15A            | 15A           | F-10     |
| 74-10FC20A            | 20A           | F-10     |

### Accessories:

| Description                | NTE Type No. |
|----------------------------|--------------|
| Fuse Clips (Double Fluted) | 74-FC10      |