


NPN Power Silicon Transistor

2N4150



Features

- Available in commercial, JAN, JANTX, JANTXV, JANS and JANSR 100K rads (Si) per MIL-PRF-19500/394
- TO-5 Package



Maximum Ratings

Ratings	Symbol	2N4150	Units
Collector - Emitter Voltage	V_{CEO}	70	Vdc
Collector - Base Voltage	V_{CBO}	100	Vdc
Emitter - Base Voltage	V_{EBO}	10.0	Vdc
Collector Current	I_C	10.0	Adc
Total Power Dissipation @ $T_A = +25\text{ }^\circ\text{C}$ (1) @ $T_C = +25\text{ }^\circ\text{C}$ (2)	P_T	160 15	W W
Operating & Storage Temperature Range	T_{op}, T_{stg}	-65 to +200	$^\circ\text{C}$
Thermal Resistance, Junction-to-Case Junction-to-Ambient	$R_{\theta JC}$ $R_{\theta JA}$	10.0 175.0	$^\circ\text{C/W}$

1) Derate linearly @ 5.7 mW/ $^\circ\text{C}$ for $T_A > +25\text{ }^\circ\text{C}$

2) Derate linearly @ 100 mW/ $^\circ\text{C}$ for $T_C > +25\text{ }^\circ\text{C}$

Electrical Characteristics ($T_C = 25\text{ }^\circ\text{C}$ unless otherwise noted)

OFF Characteristics	Symbol	Minimum	Maximum	Units
Collector - Emitter Breakdown Voltage $I_C = 100\text{ mA}$	$V_{(BR)CEO}$	70	---	Vdc
Collector - Emitter Cutoff Current $V_{BE} = 0.5\text{ Vdc}, V_{CE} = 60\text{ Vdc}$	I_{CEX}	---	10	μAdc
Collector - Emitter Cutoff Current $V_{CE} = 60\text{ Vdc}$	I_{CEO}	---	10	μAdc
Emitter - Base Cutoff Current $V_{EB} = 7.0\text{ Vdc}$ $V_{EB} = 5.0\text{ Vdc}$	I_{EBO}	---	10 0.1	μAdc
Collector-Base Cutoff Current $V_{CB} = 100\text{ Vdc}$ $V_{CB} = 80\text{ Vdc}$	I_{CBO}	---	10 0.1	μAdc




Electrical Characteristics -con't

ON Characteristics		Symbol	Mimimum	Maximum	Units
Collector-Base Cutoff Current $I_C = 1.0 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$ $I_C = 5.0 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$ $I_C = 10.0 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$		H_{FE}	50 40 10	200 120 ---	
Collector-Emitter Saturation Voltage $I_C = 5.0 \text{ Adc}, I_B = 0.5 \text{ Adc}$ $I_C = 10.0 \text{ Adc}, I_B = 1.0 \text{ Adc}$		$V_{CE(sat)}$	---	0.6 2.5	Vdc
Base-Emitter Saturation Voltage $I_C = 5.0 \text{ Adc}, I_B = 0.5 \text{ Adc}$ $I_C = 10.0 \text{ Adc}, I_B = 1.0 \text{ Adc}$		$V_{BE(sat)}$	---	1.5 2.5	Vdc
DYNAMIC Characteristics					
Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 0.2 \text{ Adc}, V_{CE} = 10.0 \text{ Vdc}, f = 10 \text{ MHz}$		$ h_{fe} $	1.5	7.5	
Output Capacitance $I = 0, V_{CB} = 10.0 \text{ V}, f = <1.0 \text{ Hz}$		C_{obo}	---	350	pF
SWITCHING Characteristics					
Delay Time	$V_{CC} = 20 \text{ Vdc}, V_{BB} = 5.0 \text{ Vdc},$	t_d	---	50	ns
Rise Time	$I_C = 5.0 \text{ Adc}, I_{B1} = 0.5 \text{ Adc}$	t_r	---	500	ns
Storage Time	$V_{CC} = 20 \text{ Vdc}, V_{BB} = 5.0 \text{ Adc},$	t_s	---	1.5	μs
Fall Time	$I_C = 5.0 \text{ Adc}, I_{B1} = -I_{B2} = -0.5 \text{ Adc}$	t_f	---	500	ns
SAFE OPERATING AREA					
DC Tests:	$T_C = +25 \text{ }^\circ\text{C}, 1 \text{ Cycle}, t = 1.0 \text{ s}$				
Test 1:	$V_{CE} = 40.0 \text{ Vdc}, I_C = 0.22 \text{ Adc}$				
Test 2:	$V_{CE} = 70 \text{ Vdc}, I_C = 90 \text{ mAdc}$				

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Outline Drawing

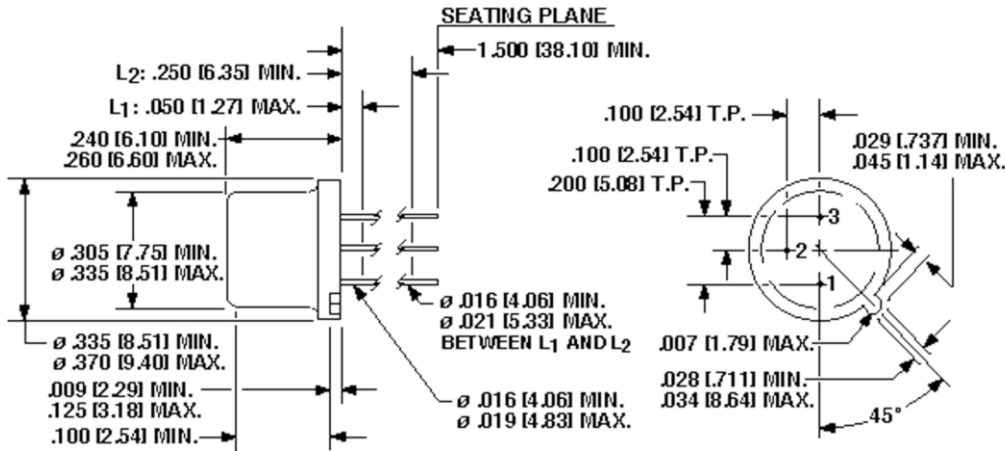

Note: All dimensions are inches [mm].

Aeroflex / Metelics, Inc.

Hi-Rel Components

9 Hampshire Street,
Lawrence, MA 01840
Tel: (603) 641-3800
Fax: (978) 683-3264

www.aeroflex.com/metelicsHRC

975 Stewart Drive,
Sunnyvale, CA 94085
Tel: (408) 737-8181
Fax: (408) 733-7645

Sales: 888-641-SEMI (7364)

54 Grenier Field Road,
Londonderry, NH 03053
Tel: (603) 641-3800
Fax: (603)-641-3500

ISO 9001: 2008 certified companies

www.aeroflex.com/metelics metelics-sales@aeroflex.com

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2011 Aeroflex / Metelics. All rights reserved.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.