


1. Wiring Diagram.

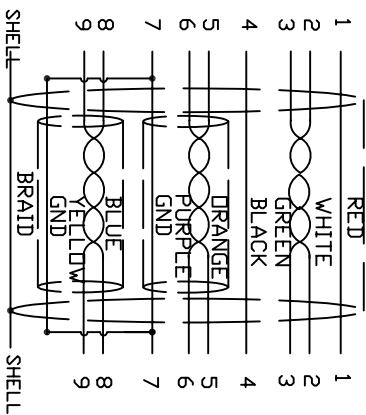

2. Cable test condition :

Open / Short : 100%  
 Insulation resistance : 5M ohms  
 Contact resistance : 2 ohm  
 Hipot : DC 300V / 1 sec

3. Each pcs with PE polybag.

5	CONN	USB3.0 B MAILE G/F BLUE	1	P2
4	PVC	45P PVC BLACK OVERMOLD	25g	
3	PE	LLDPE 500026 6201	16g	
2	CONN	USB3.0 A/M G/F BLUE	1	P1
1	CABLE	《28AWG (7/0.12TC) *1P+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12TC) *1P+24AWG(7/0.2TC)*2C+A+D+B (96/0.12AM) ODS.5 BLACK	1	3000mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF
		BILL OF MATERIAL		

A	INITIAL RELEASE	2014/08/28
REVEN#	DESCRIPTION	DATE
	<b>Cnc Tech,LLC</b>	
P/N:	<b>103-1030-BL-00300</b>	REV
TITLE	CABLE USB3.0 AM TO B/M	A
DRAWN	WENC	DATE
CHECKED	EDWIN	08/24/14
APPROVAL		
CUSTOMER P/N:		
CUSTOMER:		
SHEET	1 OF 1	