




REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Victory	2019/08/22

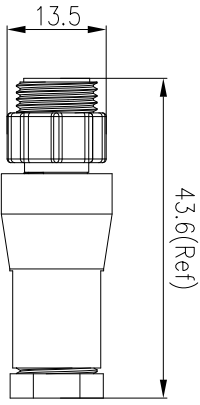


21XXX311-01  
Pin Number

5 Pin	6 Pin
P/N: 21005311-01	P/N: 21006311-01
Pin Assignments Front View	
7 Pin	8 Pin
P/N: 21007311-01	P/N: 21008311-01

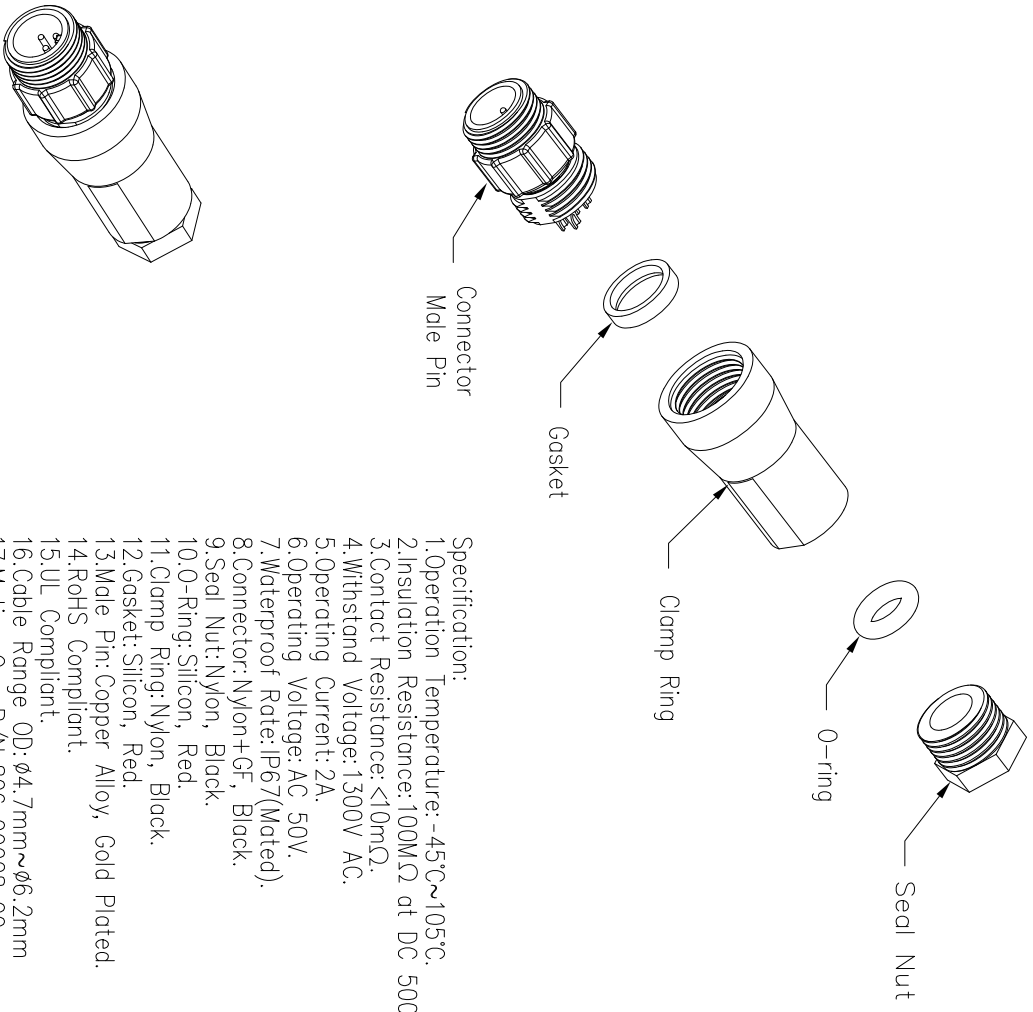

- Specification:
1. Operation Temperature: -45°C~105°C.
  2. Insulation Resistance: 100MΩ at DC 500V.
  3. Contact Resistance: <10mΩ.
  4. Withstand Voltage: 1300V AC.
  5. Operating Current: 2A.
  6. Operating Voltage: AC 50V.
  7. Waterproof Rate: IP67(Mated).
  8. Connector: Nylon+GF, Black.
  9. Seal Nut: Nylon, Black.
  10. O-Ring: Silicon, Red.
  11. Clamp Ring: Nylon, Black.
  12. Gasket: Silicon, Red.
  13. Male Pin: Copper Alloy, Gold Plated.
  14. RoHS Compliant.
  15. UL Compliant.
  16. Cable Range OD: φ4.7mm~φ6.2mm
  17. Mating Cap P/N: 806-00028-00.

UNIT: mm	DESCRIPTION		
	Mini Series Screw Type Female Plug With Male Pin		
TOLERANCE	SCALE:	SIZE	SHEET
.X .XX .XXX ANGLES	1:1	A4	1 OF 1
	REV		*: Inspection Item
	C1		

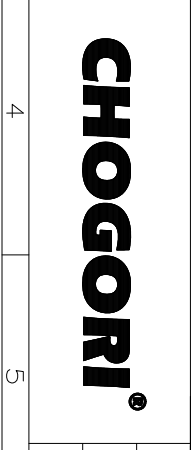

PART NO	21XXX311-01	DRAWN BY	Victory	DATE	2019/08/22
DWG NO		CHECKED BY	Ivan	DATE	2019/08/22
CUSTOMER		APPROVED BY	Ponson	DATE	2019/08/22