


DRAWING MADE IN THIRD ANGLE PROJECTION

© COPYRIGHT 1974 BY AMP INCORPORATED, HARRISBURG, PA.
ALL INTERNATIONAL RIGHTS RESERVED. AMP INCORPORATED PRODUCTS
COVERED BY U. S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

206638-2	AS SHOWN ON STRIP (STATUS OBSOLETE)	PLATE PER NOTE 3
206638-3	AS SHOWN LOOSE PIECE (STATUS OBSOLETE)	PLATE PER NOTE 3
5-206638-2	AS SHOWN ON STRIP (RoHS COMPLIANT)	PLATE PER NOTE 4
5-206638-3	AS SHOWN LOOSE PIECE (RoHS COMPLIANT)	PLATE PER NOTE 4

		REVISIONS			
P	ZONE	LTR	DESCRIPTION	DATE	APPROVED
		O	RELEASED WAS 5089-2	28 1/30/74	QJM
		A	REV. PER ECN D-045	28 5/27/74	SJ.
		B	REV. PER ECN J-876	1/4/83	DE JKL
		C	REV. PER ECN R-720	10-17-81	MPH BV
		D	REV./ECN R-1917	3-4-88	MPH MK
		E	ADDED-3/ECN R-2735	7-2-87	RG THW
		F	REVISED ECN 54620	5-10-88	THW
		G	REVISED ECN 54712	7-7-88	THW
		H	REVISED PER ECR-16-018092	02-12-16	PO

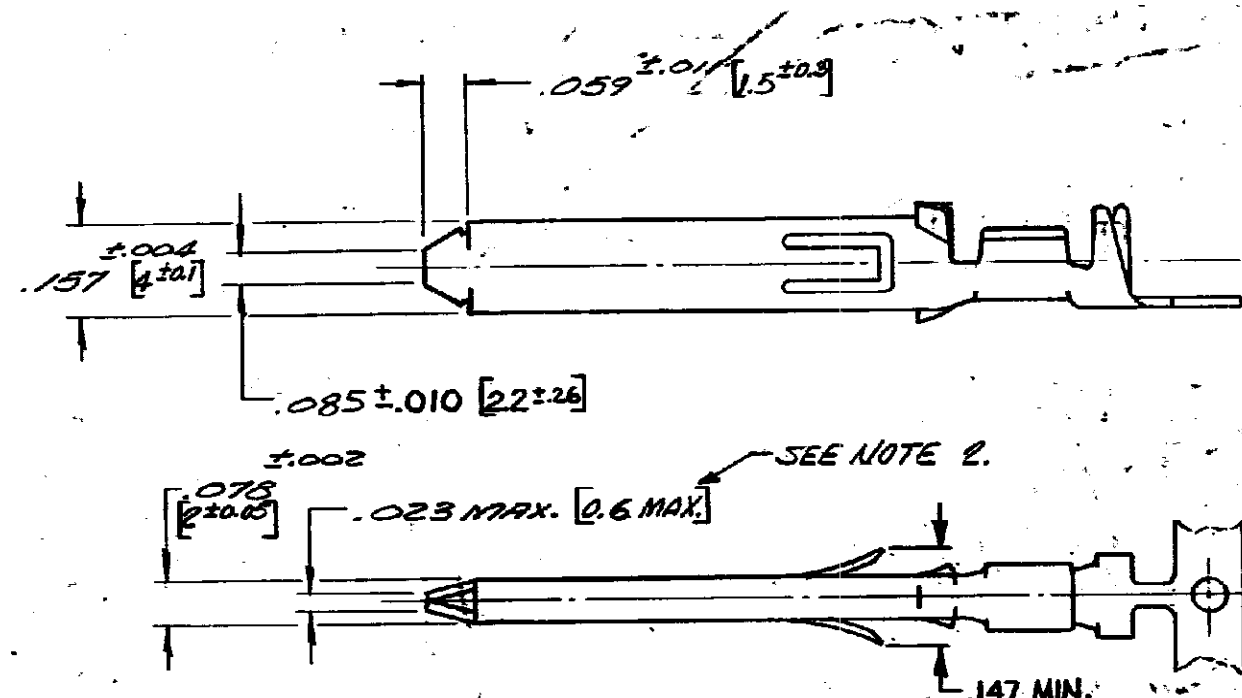

CONTACT U.L. LISTED FOR 15 AMPS, 250 VOLTS
WITH 16 AWG WHEN USED IN AMP INC.
HOUSING NO. 206637-1.

1. ACCOMMODATES 20-18-16 AWG, INSULATION RANGE .080/.135 DIA.
2. FIGURES SHOWN IN BRACKETS REPRESENT DIMENSIONS IN MILLIMETERS.
3. FINISH: TIN .000050 MIN THICK PER MIL-T-10727 OVER NICKEL (FLASH) PER QQ-N-290. PLATING THICKNESS POINT OF MEASUREMENT EQUALS 1/2 CONTACT LENGTH.
4. FINISH: TIN (WHISKER MITIGATED, LEAD-FREE) .000050 MINIMUM THICKNESS PER ASTM-B545-13 OVER NICKEL FLASH PER QQ-N-290. POINT OF MEASUREMENT EQUALS 1/2 CONTACT LENGTH.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON DECIMALS ANGLES	CONTRACT NO	PART NO	
	DR <i>D-22-73</i>	TE Connectivity	
	CHK <i>QJM 4/30/74</i>	NAME	
	APP <i>S. J. 4/30/74</i>	PIN CONTACT - POWER CORD RECP. (CRIMP)	
MATERIAL	SIZE	CODE IDENT NO	NUMBER
<i>BRASS</i>	<i>B</i>	<i>00779</i>	<i>206638</i>
FINISH	OTHER APPD	SCALE	SHEET
<i>SEE TABLE</i>		<i>2-1</i>	<i>1 OF 1</i>