


Mini SERVO (ES08A) SERIES

SERVO ES08A SPECIFICATIONS

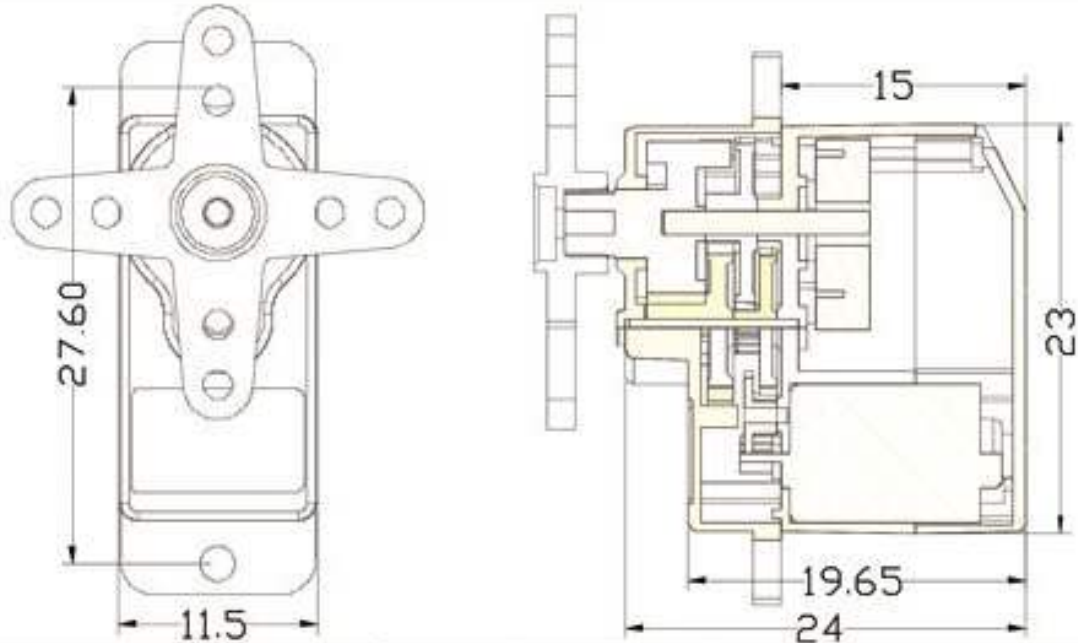

Operating Voltage:		4.8~6.0V
STD Direction:		Counter Clockwise / Pulse Traveling 1500 to 1900usec
Stall Torque:	4.8V	1.5 Kgf.cm(21.0 oz.in)
Operating Speed:	4.8V	0.12 Sec/60° at no load
Stall Torque:	6.0V	1.8 Kgf.cm(25.2 oz.in)
Operating Speed:	6.0V	0.10 Sec/60° at no load
Size:		23X11.5X24 mm
Weight:		8.5 g(0.31 oz)
Plug Available		FUT ;JR
Other		Analog,Plastics

Documents

Please visit our wiki page for more info about this product.It will be appreciated if you can help us improve the documents, add more demo code or tutorials. For technical support, please post your questions to our forum.

- Arduino Tutorial - Servo Library
- Understanding RC Servos

Technical Details

Dimensions	60mm x 60mm x 14.50mm
Weight	G.W 12.50g
Battery	Exclude

Part List


Grove - Servo	1
Cable	1
Servos Horn	3
Screw	3

ECCN/HTS

ECCN	ERA99
HSCODE	8501101000

Certification

RoHS	Compliant
------	-----------

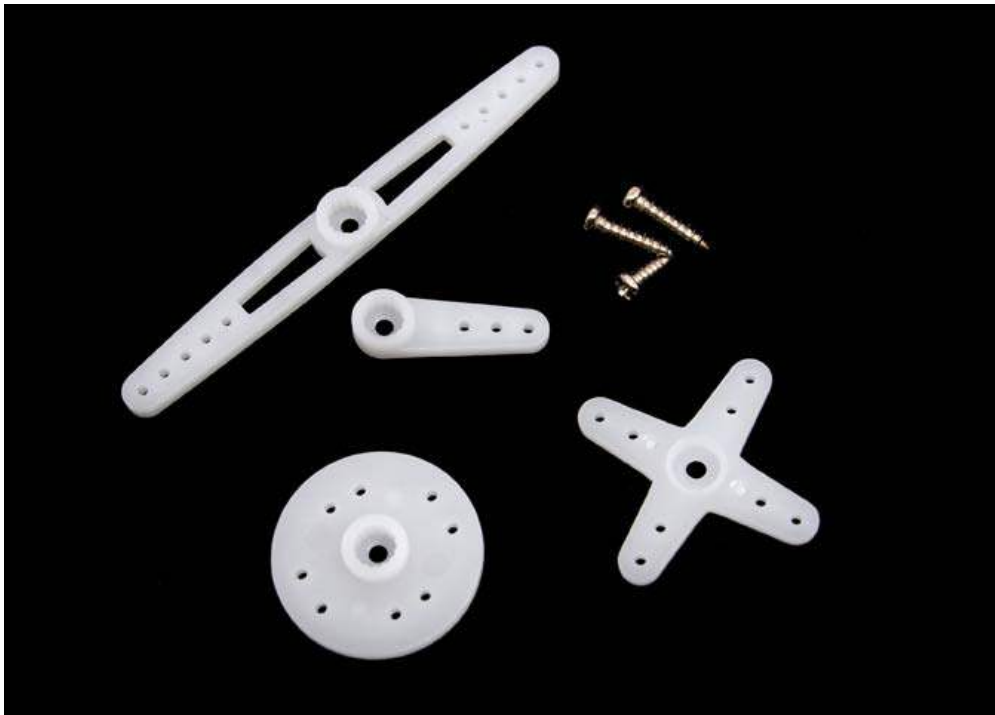

https://www.seedstudio.com/depot/grove-servo-p-1241.html?cPath=170_171 10-18-18