


	T	G	T	. m		0
_					_	

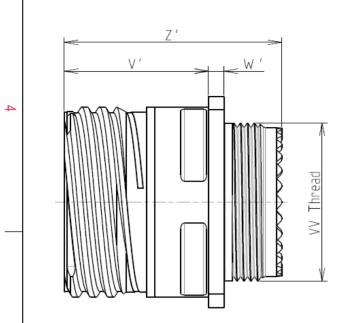

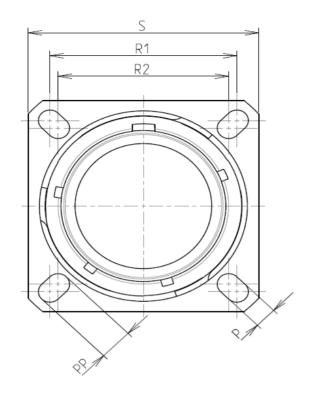



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 2000 hours

8D 0

G

11

Μ

22

Н


F

Ν

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
РР	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V	19.5+1.4/-0	
W'	2.1/3.65	
Ζ'	32 Max	
VV THREAD	M15x1-6g	

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

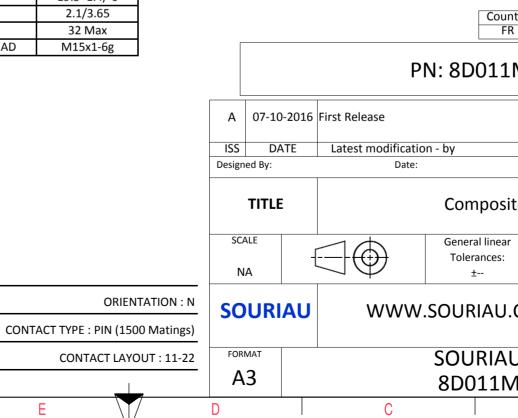

	Φ		А			
					4	
∖S EX#	AMPLE				3	
s whic er of t	non-conformit ch does not co he Parties or t on, technical n	mply with by a third par				
untry FR	Jurisd	liction & Con Not Listed	trol List		2	
1M	22HN					
		CUSTOME	R DRAWING	MOD N°		
site	e Receptacle 8D series					
ar	NPRDS / PROJECT					
			59 cument is the prop	perty of	1	
.COM SOURIAU it must not be reproduced or communicated without permission						
	DRG N°			SHEET		
M2	2HN-C			1/2	J	
	В		А			

_		_				
		Contact Layout				Panel Cuto
		22*				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
4	(°0 0°			×	
	Ctc	4#22D 11-22 X Y			<u>v</u>	
ω	A B C D	1.905 1.905 1.905 -1.905 -1.905 -1.905 -1.905 1.905				Dim ØA ØAA
						R1 ØT
						SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommenda
м						Coun FR PN: 8D011I
					A 07-10-2 ISS DAT Designed By:	016 First Release
					SCALE	Composit General linear Tolerances:
-					SOURIA	
					FORMAT A3	SOURIAL 8D011N
	Н	G	F	E	D	C

Т

ш

т

G

0

