

BAS16W-AU

SURFACE MOUNT SWITCHING DIODES

| | | | |
|----------------|-----------------|--------------|-----------------|
| VOLTAGE | 100 Volt | POWER | 200mWatt |
|----------------|-----------------|--------------|-----------------|

FEATURES

- Fast switching Speed.
- Electrically Identical to Standard JEDEC
- High Conductance
- Surface Mount Package Ideally Suited for Automatic Insertion
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard


MECHANICAL DATA

Case: SOT-323 plastic case.


Terminals: Solderable per MIL-STD-750, Method 2026

Standard packaging: 8mm tape

Approx weight: 0.00018 ounces, 0.005 grams



SOT-323 Unit : inch(mm)

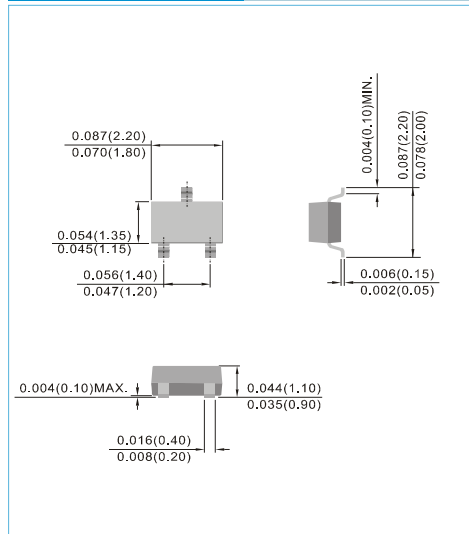

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T_J=25°C unless otherwise noted)

| PARAMETER | SYMBOL | VALUE | UNITS |
|--|------------------|---------------|--------|
| Marking Code | | A6 | |
| Reverse Voltage | V _R | 75 | V |
| Peak Reverse Voltage | V _{RM} | 100 | V |
| RMS Voltage | V _{RMS} | 50 | V |
| Maximum DC Blocking Voltage | V _{DC} | 75 | V |
| Maximum Average Forward Current at T _A =25°C | I _{AV} | 150 | mA |
| Peak Forward Surge Current, 1μs | I _{FSM} | 4 | A |
| Power Dissipation Derate Above 25°C | P _{TOT} | 200 | mW |
| Maximum Forward Voltage | V _F | 0.855 / 0.01A | V |
| Maximum DC Reverse Current at Rated DC Blocking Voltage T _J =25°C | I _R | 1@75V | μA |
| Junction Capacitance (Note1) | C _J | 2 | pF |
| Maximum Reverse Recovery (Note2) | T _{RR} | 6 | ns |
| Typical Thermal Resistance | R _{θJA} | 640 | °C / W |
| Operation and Storage Temperature Range | T _J | -55 to +150 | °C |

NOTE :

1. C_J at V_R=0, f=1MHZ

2. From I_F=10mA to I_R=1mA, V_R=6Volts, R_L=100Ω

BAS16W-AU

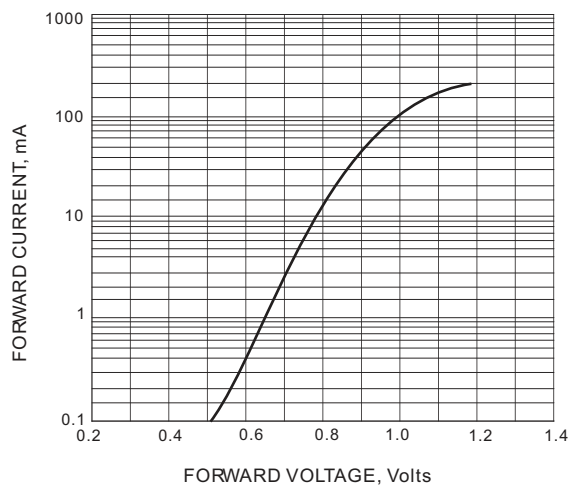


FIG. 1-TYPICAL FORWARD CHARACTERISTIC

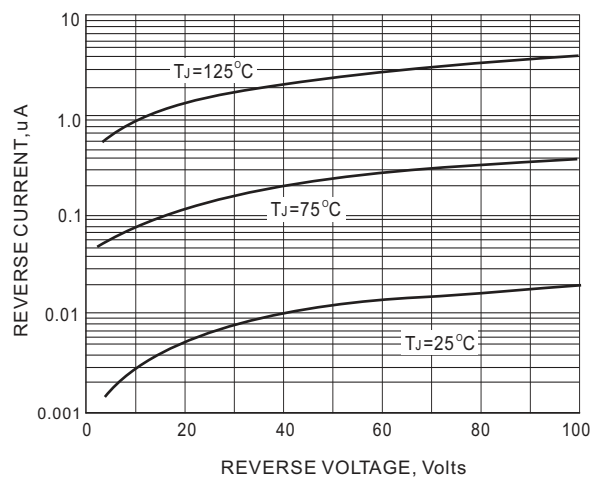


FIG. 2-TYPICAL REVERSE CHARACTERISTICS


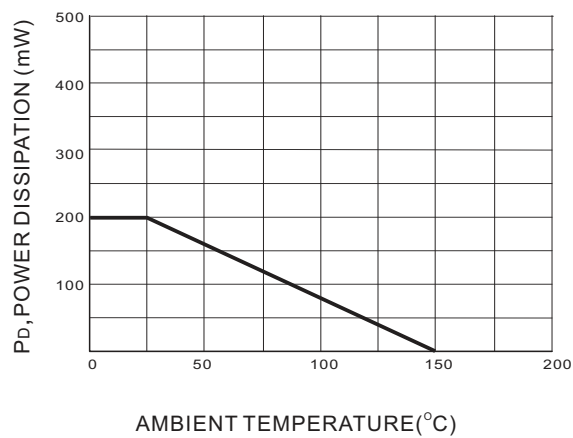


FIG. 3 POWER DERATING CURVE

BAS16W-AU

MOUNTING PAD LAYOUT

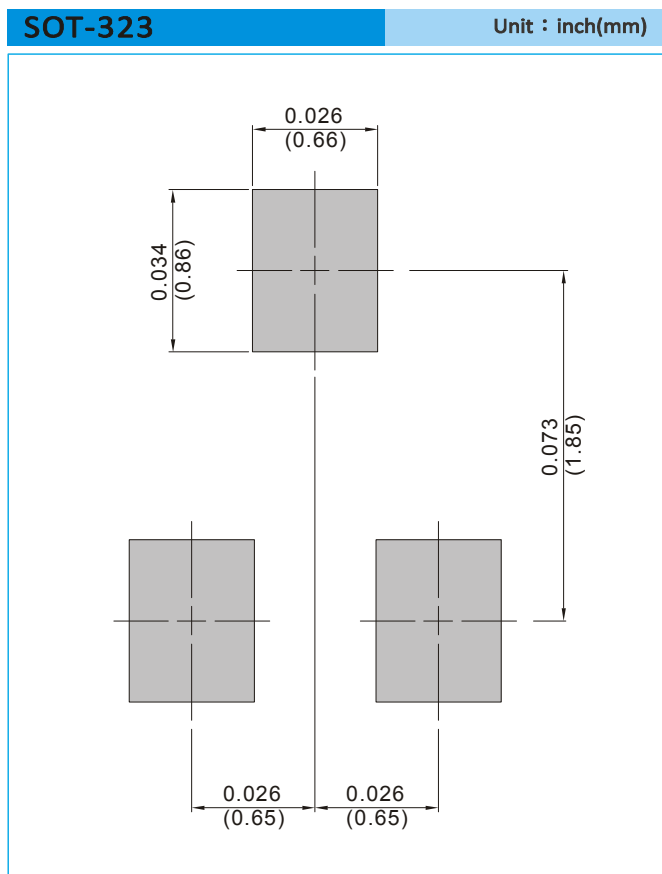

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

BAS16W-AU

Part No_packing code_Version

BAS16W-AU_R1_000A1

BAS16W-AU_R2_000A1

For example :

RB500V-40_R2_00001



| Packing Code XX | | | | Version Code XXXXX | | |
|--------------------------------------|----------------------|----------------------------------|----------------------|---------------------------|----------------------|---------------------------------------|
| Packing type | 1 st Code | Packing size code | 2 nd Code | HF or RoHS | 1 st Code | 2 nd ~5 th Code |
| Tape and Ammunition Box (T/B) | A | N/A | 0 | HF | 0 | serial number |
| Tape and Reel (T/R) | R | 7" | 1 | RoHS | 1 | serial number |
| Bulk Packing (B/P) | B | 13" | 2 | | | |
| Tube Packing (T/P) | T | 26mm | X | | | |
| Tape and Reel (Right Oriented) (TRR) | S | 52mm | Y | | | |
| Tape and Reel (Left Oriented) (TRL) | L | PANASERT T/B CATHODE UP (PBCU) | U | | | |
| FORMING | F | PANASERT T/B CATHODE DOWN (PBCD) | D | | | |



BAS16W-AU

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.