## APAM1348YD13V2.0

## **MSL level: Not Applicable**

### **FEATURES:**

- Compact Size
- Easy to Install
- RoHS Compliant

## **STANDARD SPECIFICATIONS:**

## Antenna

Parameters	Min.	Тур.	Ma	X.	Units	Note
Center Frequency	$1575.42 \pm 1.02$				MHz	
Bandwidth	5				MHz	
Gain		1.0			dBic	(Peak gain on70*70mm Ground Plane facing Zenith.)
VSWR @ Center Frequency		1.5				
Polarization Model		RHCP				(Right Hand Circular Polarization)
Impedance		50			Ω	
Working Temperature	-25		-	+72	°C	
Storage Temperature	-45			85	°C	


## Low Noise Amplifier (LNA)

Parameters	Min.	Тур.	Max.	Units	Note
Center Frequency	$1575.42 \pm 1.02$			MHz	
DC Voltage	2.70		3.30	V	
Gain		19		dB	(Without cable $+25^{\circ}C \pm 10^{\circ}C$ )
Output VSWR		1.5			
Noise Figure		1.3			(+25°C± 10°C)
DC current		3.5		mA	(At 3.0V)

#### **SMITH CHART** >

ISO9001:2008


CERTIFIED

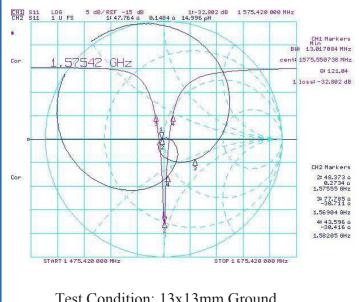

Test Condition: 13x13mm Ground



**GPS LNA GAIN PLOT** 

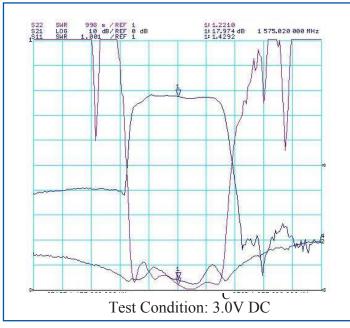

- **TYPICAL APPLICATIONS:** 
  - Automotive Navigation, Marine buoys,
  - Personal Tracking
  - Surveying equipment, Cell phone, Laptop,

**RoHS/RoHS II compliant** 

· Healthcare and medical monitoring devices, PND, PDA

Visitwww.abracon.com forTerms & Conditions of Sale Revised 06.23.14 30332 Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com




**ESD** Sensitive

A

# **GPS Active Internal Patch**

## APAM1348YD13V2.0

## **OUTLINE DIMENSION:**

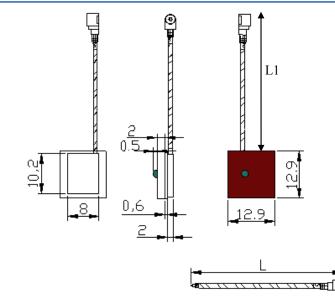

Description	Material
Antenna Type	Dielectric Ceramics
PCB	FR4
Shielding	Tinplate
RF Cable	9851SC0032-002, ф0.81±0.1mm,
	L1=33±3mm, L=37±3mm
RF Connector	I-PEX
Thickness	5.6mm Max

Tolerance: ±0.2mm

## **PACKAGING**

Package Type	Quantity
Tray	50 pcs/tray
Vacuum Bag	200pcs/box
Outer Box	1000 pcs/box

Inner Bos

Label

Outer Box

328	3
L	
C TYPE	*
TYPE QTY: PCS - STZE: 345 × 210 × 27	
G. WT kG N. WT	

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





Vacuum Bag - Package Tray

Adhesive tape

Visitwww.abracon.com forTerms & Conditions of Sale **Revised 06.23.14** 30332Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

n)

345±5.0

### **RoHS/RoHS II compliant**



Unit: mm