



Electrical specifications

Passband: 915 MHz
Insertion loss: 1.5 dB Max
Return loss: 16 dB Min
Out of band Rejection 1: 75 dB@ 850-894 MHz
Out of band Rejection 2: 75 dB@ 935-950 MHz
CW Power : 20 Watts


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA Female
Dimensions: 4.72" X 2.36" X 1.89" in

Environmental

Operating Temperature: -20 to +70° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

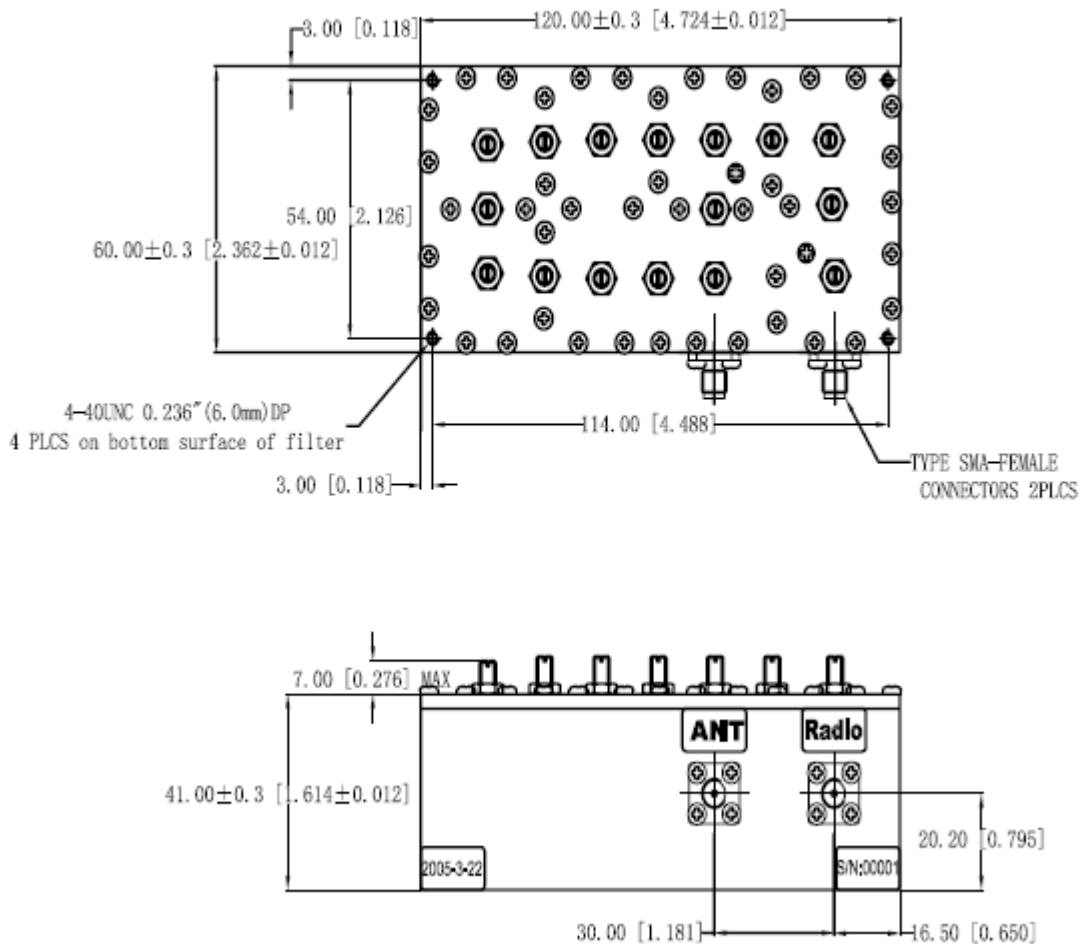



900 MHz Cavity Bandpass Filter

Part Number: AB915B495



Plot:

