




**Series: MIRANT** 

**Description: LTE 698-3600MHz FPC Antenna** 


PART NUMBER: W6101





## Features:

- Center fed FPC antenna with coax cable
- Bands 698-960, 1710-2170, 2300-2700, 3400-3600MHz
- Size 106x26x0.2mm
- Connector Fakra SMBA Code D

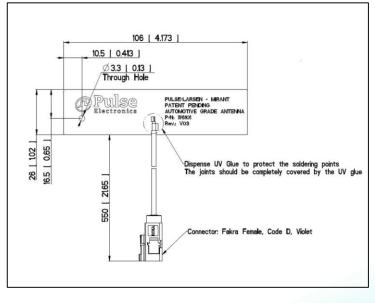


# **Applications:**

- Automotive LTE radio systems
- Embedded antenna into the mechanics
- Mirrors, bumpers, inside dash etc.

All dimensions are in mm / inches

Issue: 1642

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 LISA Tel: 1-360-944-7551

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



**Description: LTE 698-3600MHz FPC Antenna** 

**Series:** MIRANT

PART NUMBER: W6101

## **ELECTRICAL SPECIFICATIONS**

Frequency	698-960 MHz
	1710-2170 MHz
	2300-2700 MHz
	3400-3600 MHz
Nominal Impedance	50 Ω
VSWR	2.5:1
Gain 698-960 MHz	3 dBi
Gain 1710-2170 MHz	4 dBi
Gain 2300-2700 MHz	4.5 dBi
Gain 3400-3600 MHz	4 dBi
Efficiency 698-960 MHz	65 %
Efficiency 1710-2170 MHz	55 %
Efficiency 2300-2700 MHz	60%
Efficiency 3400-3600 MHz	45%



**Description: LTE 698-3600MHz FPC Antenna** 

Series: MIRANT
PART NUMBER: W6101

#### **MECHANICAL SPECIFICATIONS**

Radiator material FPC

Radiator Size X,Y 106 x 26 mm

Radiator Thickness 0.2 mm

Color Black

Fixing system Adhesive tape, 3MVHB 4949

Cable type RG316

Cable length 550mm

Connector Fakra SMBA Code D

## **ENVIRONMENTAL SPECIFICATIONS**

Operating temperature -40~ +85° C

Mechanical Vibration Random vibration input of 60 min/axis,

all three perpendicular axis.

Transportation frequency 5-500 Hz using Fig 514.6C-I and Table 514.6-II of MIL STD 810G section 514.6,

Shock Impact Per EIA-TIA-329-B1 spec

Storage Temperature -40° to +85° C

Humidity +30°C @ 93% RH






**Series: MIRANT** 

PART NUMBER: W6101

## **MECHANICAL Drawing**

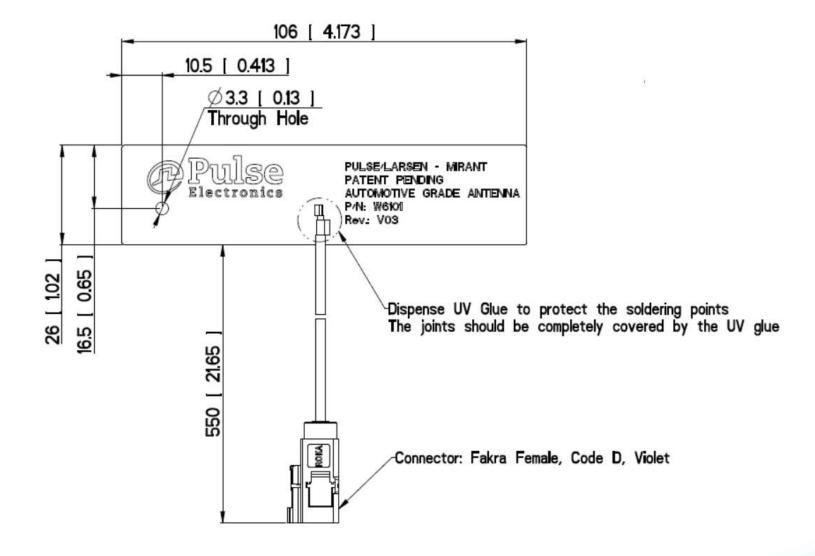






**Series: MIRANT** 

PART NUMBER: W6101

## **MECHANICAL** Drawing

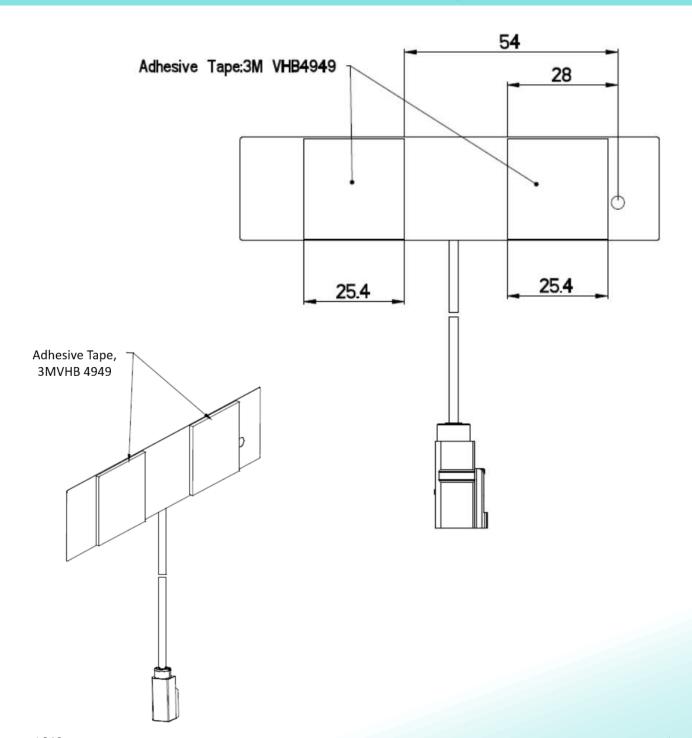

Issue: 1642








**Series: MIRANT** 

PART NUMBER: W6101

#### **CHARTS**

#### VSWR vs Frequency W6101 Free space with Mirror

Measured at Pulse, USA - Mar. 23, 2015

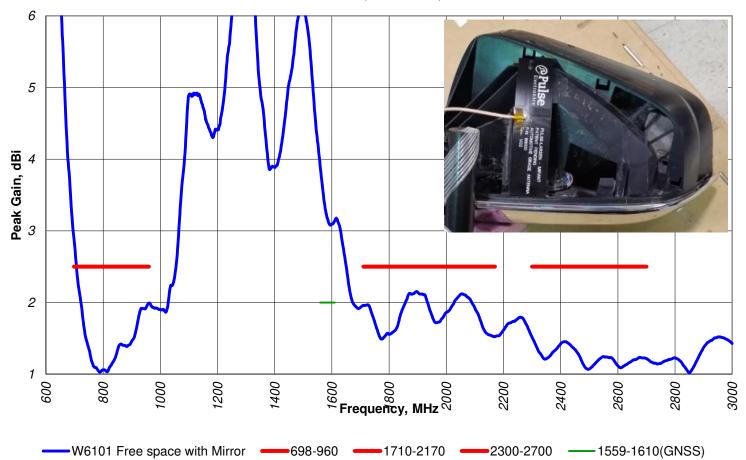






**Series: MIRANT** 

PART NUMBER: W6101

## **CHARTS**

# Peak Gain vs Frequency W6101 Measured at Pulse, USA - May. 31, 2016

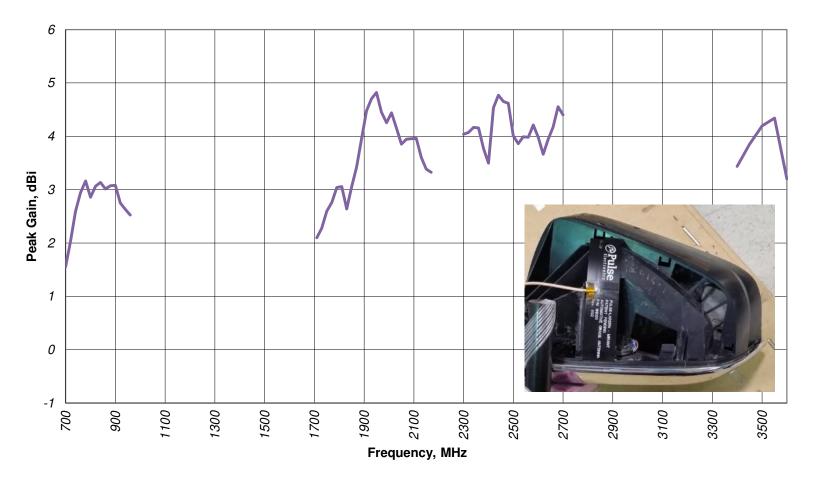




**Description: LTE 698-3600MHz FPC Antenna** 

PART NUMBER: W6101

# **Series: MIRANT**

#### **CHARTS**

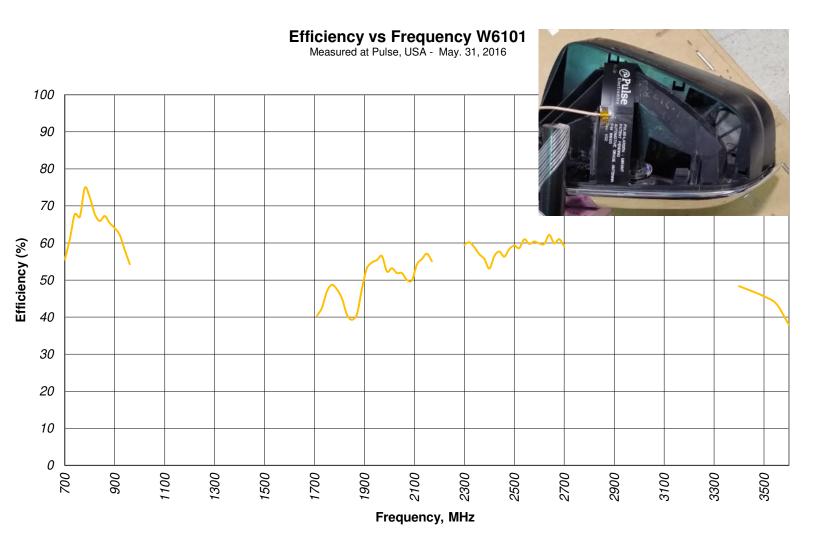



**Description: LTE 698-3600MHz FPC Antenna** 

PART NUMBER: W6101

**Series: MIRANT** 

# **Packaging**

1 antennas packed in one plastic bag

100 bags(TBD) of antennas packed in a cardboard box

1 label on each box with qty, part number, date code.