

REV. C
DCO 301387


TOLERANCES ±.010" - UNLESS
OTHERWISE SPECIFIED

COIL: @ 25°C
RESISTANCE _____ 290 OHMS ±10%
NOMINAL VOLTAGE _____ 28 VDC
MUST OPERATE _____ 13.5 VDC MAX.
COIL TRANSIENT SUPPRESSION: 42 VDC MAX.
MUST RELEASE _____ 5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:
VIBRATION _____ 10 _____ Hz TO _____ 3000 _____ Hz @ _____ 30 _____ g's
SHOCK _____ 200 _____ g's _____ 6 _____ MS. DURATION
TEMPERATURE _____ -70 _____ °C TO _____ +125 _____ °C

NOTES: OPERATE, RELEASE 15 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.
CONTACT BOUNCE 1 MS MAX.
CONTACT BREAK BOUNCE 0.1 MS MAX.

CUSTOMER DATA SHEET

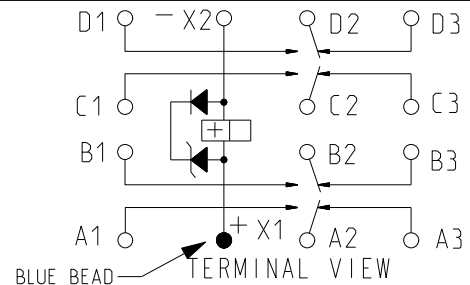

CONTACT RATING: _____ LOW LEVEL
10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE
100,000 OPERATIONS

DR. R.F. 21APR2011 | CK. M.B. 26APR2011



CUST. _____ QPL
CUST. NO. M83536/16-022M REV. ----

TE NUMBER
2-1617754-1

CII PART NUMBER
FCA-410-1622M