


DESCRIPTION: 15 POS HIGH DENSITY OVER (2) PS/2

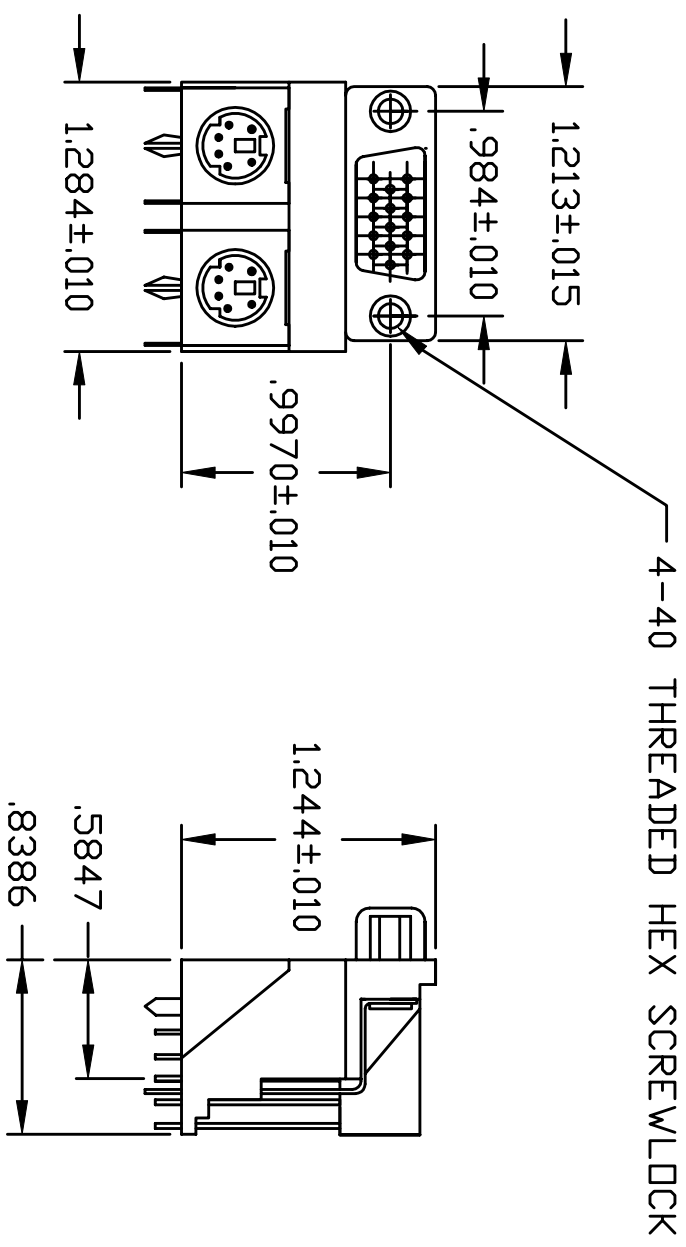

4-40 THREADED HEX SCREWLOCK

SPECIFICATIONS:

ELECTRICAL CHARACTERISTICS:

- Contact Current Rating: 3 Amperes
- Dielectric Withstanding Voltage: AC 1000V/60 sec. r.m.s.
- Insulation Resistance: 5000 Megohms Minimum DC 500
- Contact Resistance: 25 Milliohms Maximum
- Operating Temperature: -55° to +105°

MATERIALS:

- Contacts: Brass
- Insulator: PBT UL 94V-0
- High Density D-sub = Blue
- Mini-Din = Left Port = Purple
- Right Port = Green


Shell: Cold Roll Steel

PLATINGS:

- Contacts: Gold Flash
- Shells: Nickel Plated

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF APPARATUS WITHOUT WRITTEN PERMISSION.	
	DRAWN: PAM JENKINS CHECKED:	DATE: 4-30-01 DATE:

NorComp		
SCALE:	SHEET 1 OF 2	REV 1
DWG NO. 999-H15-PS2-571		

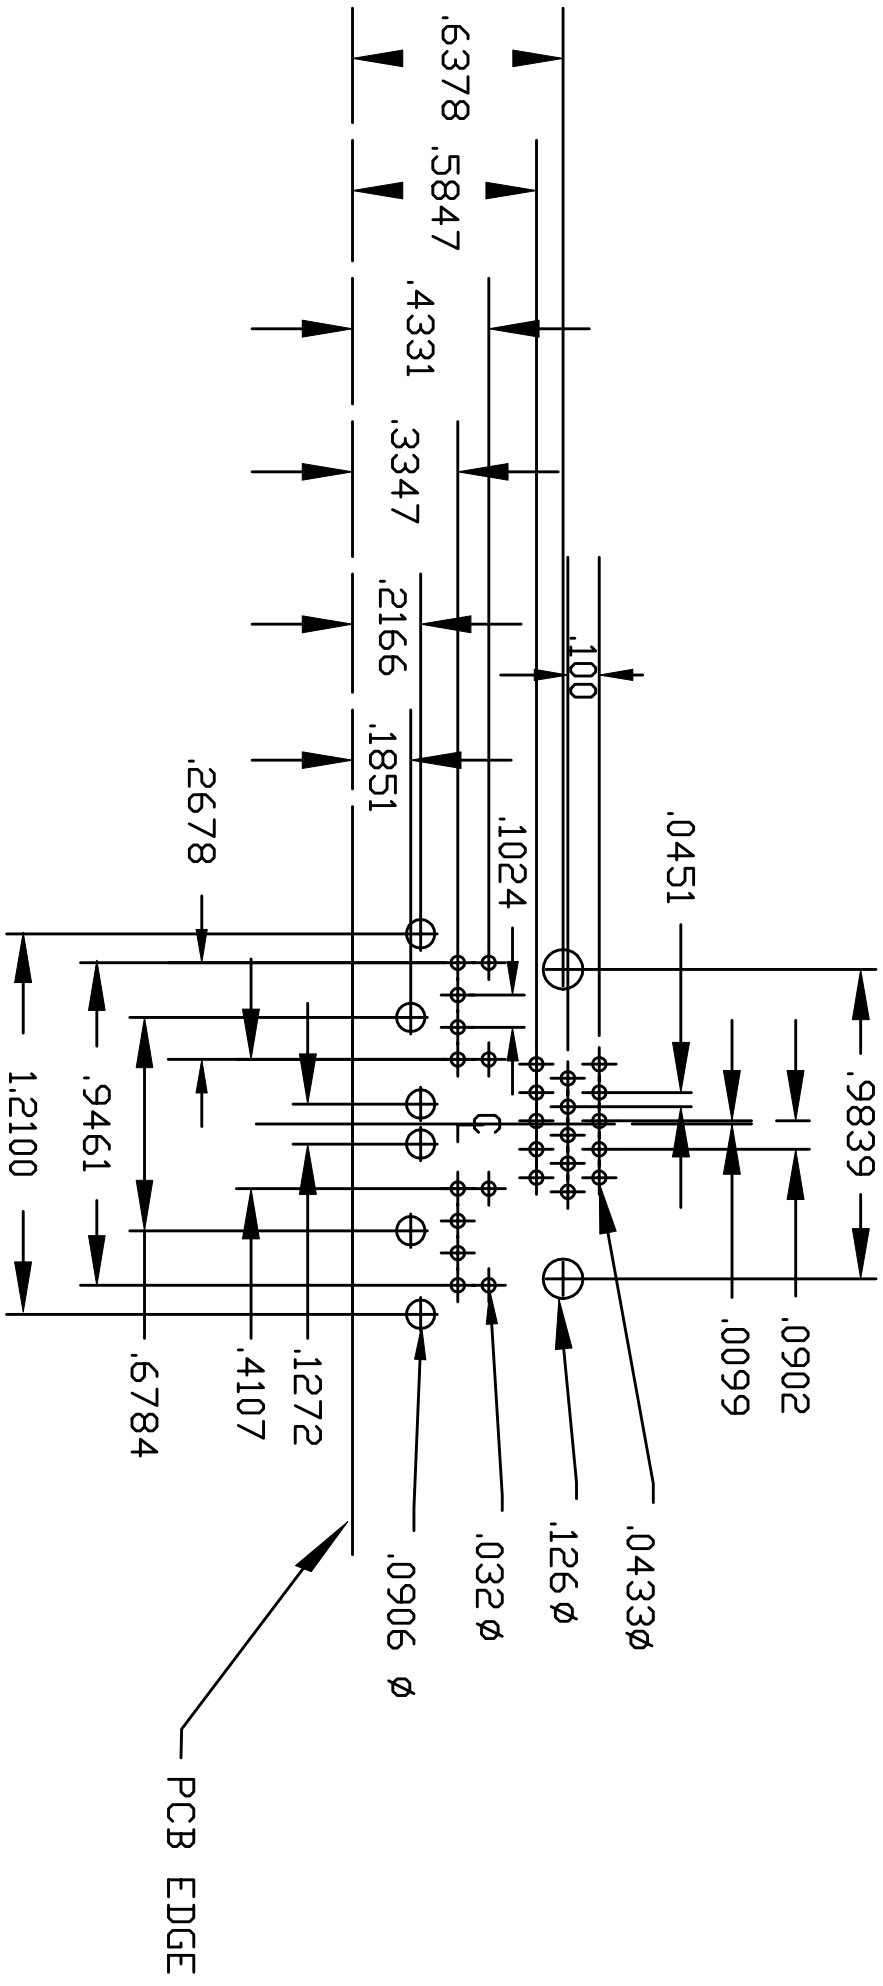

NC

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN: PAM JENKINS		DATE: 4-25-01	
CHECKED:		DATE:	
SCALE:	SHEET 2 OF 2	REV 3	
DWG NO. 999-H15-PS2-491			