
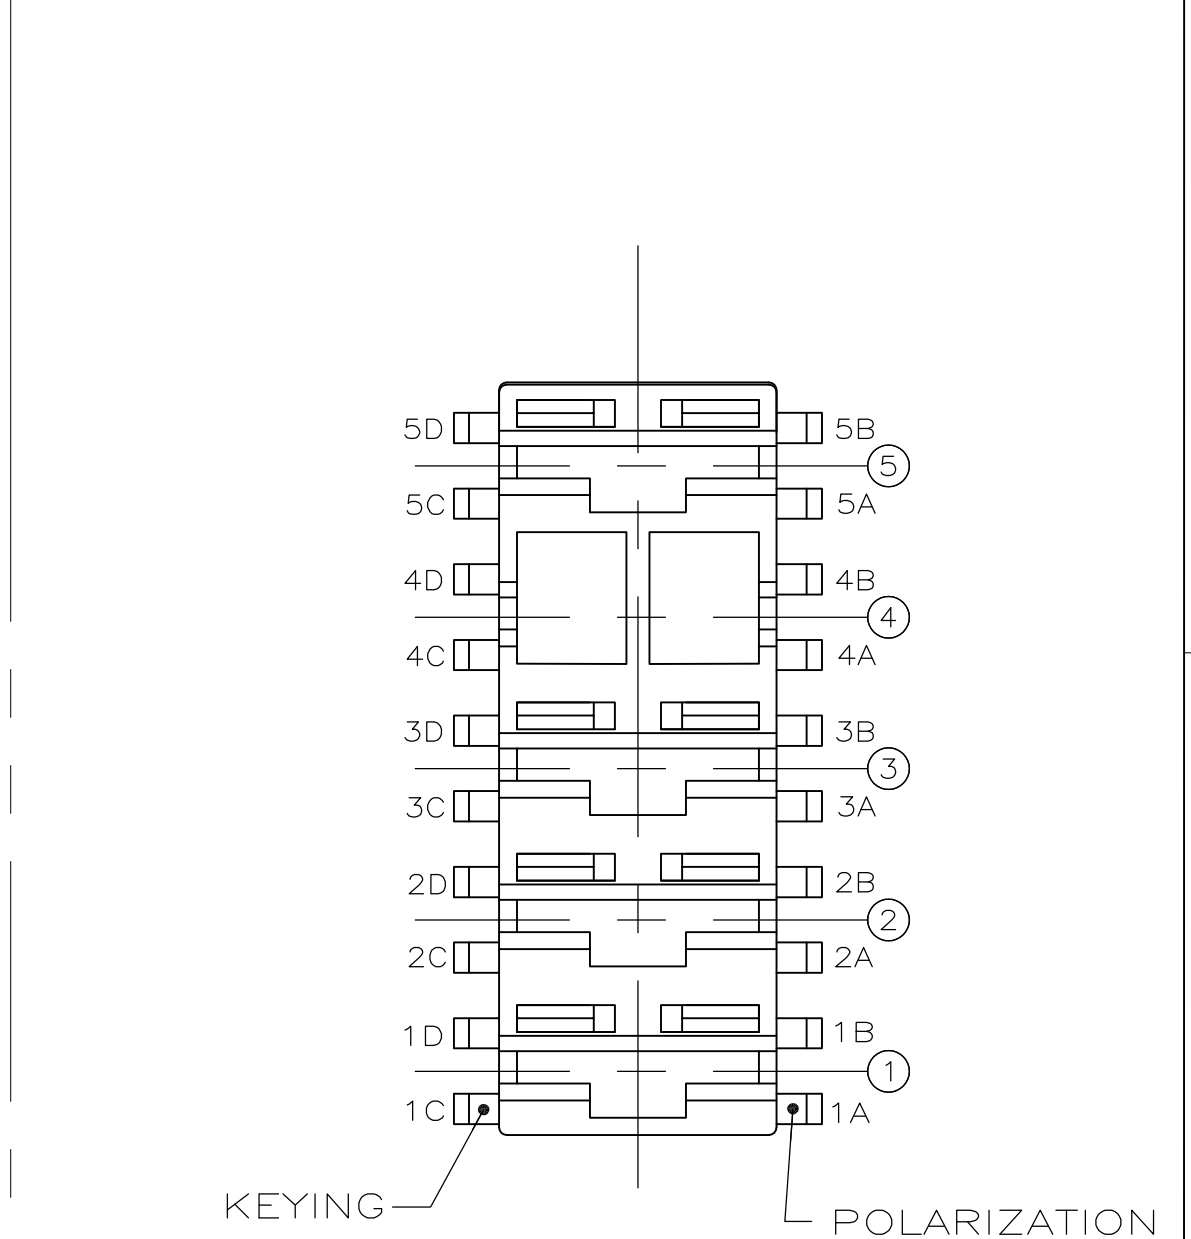


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
H		REVISED PER ECR-16-001902	22MAR2016	BW	JP

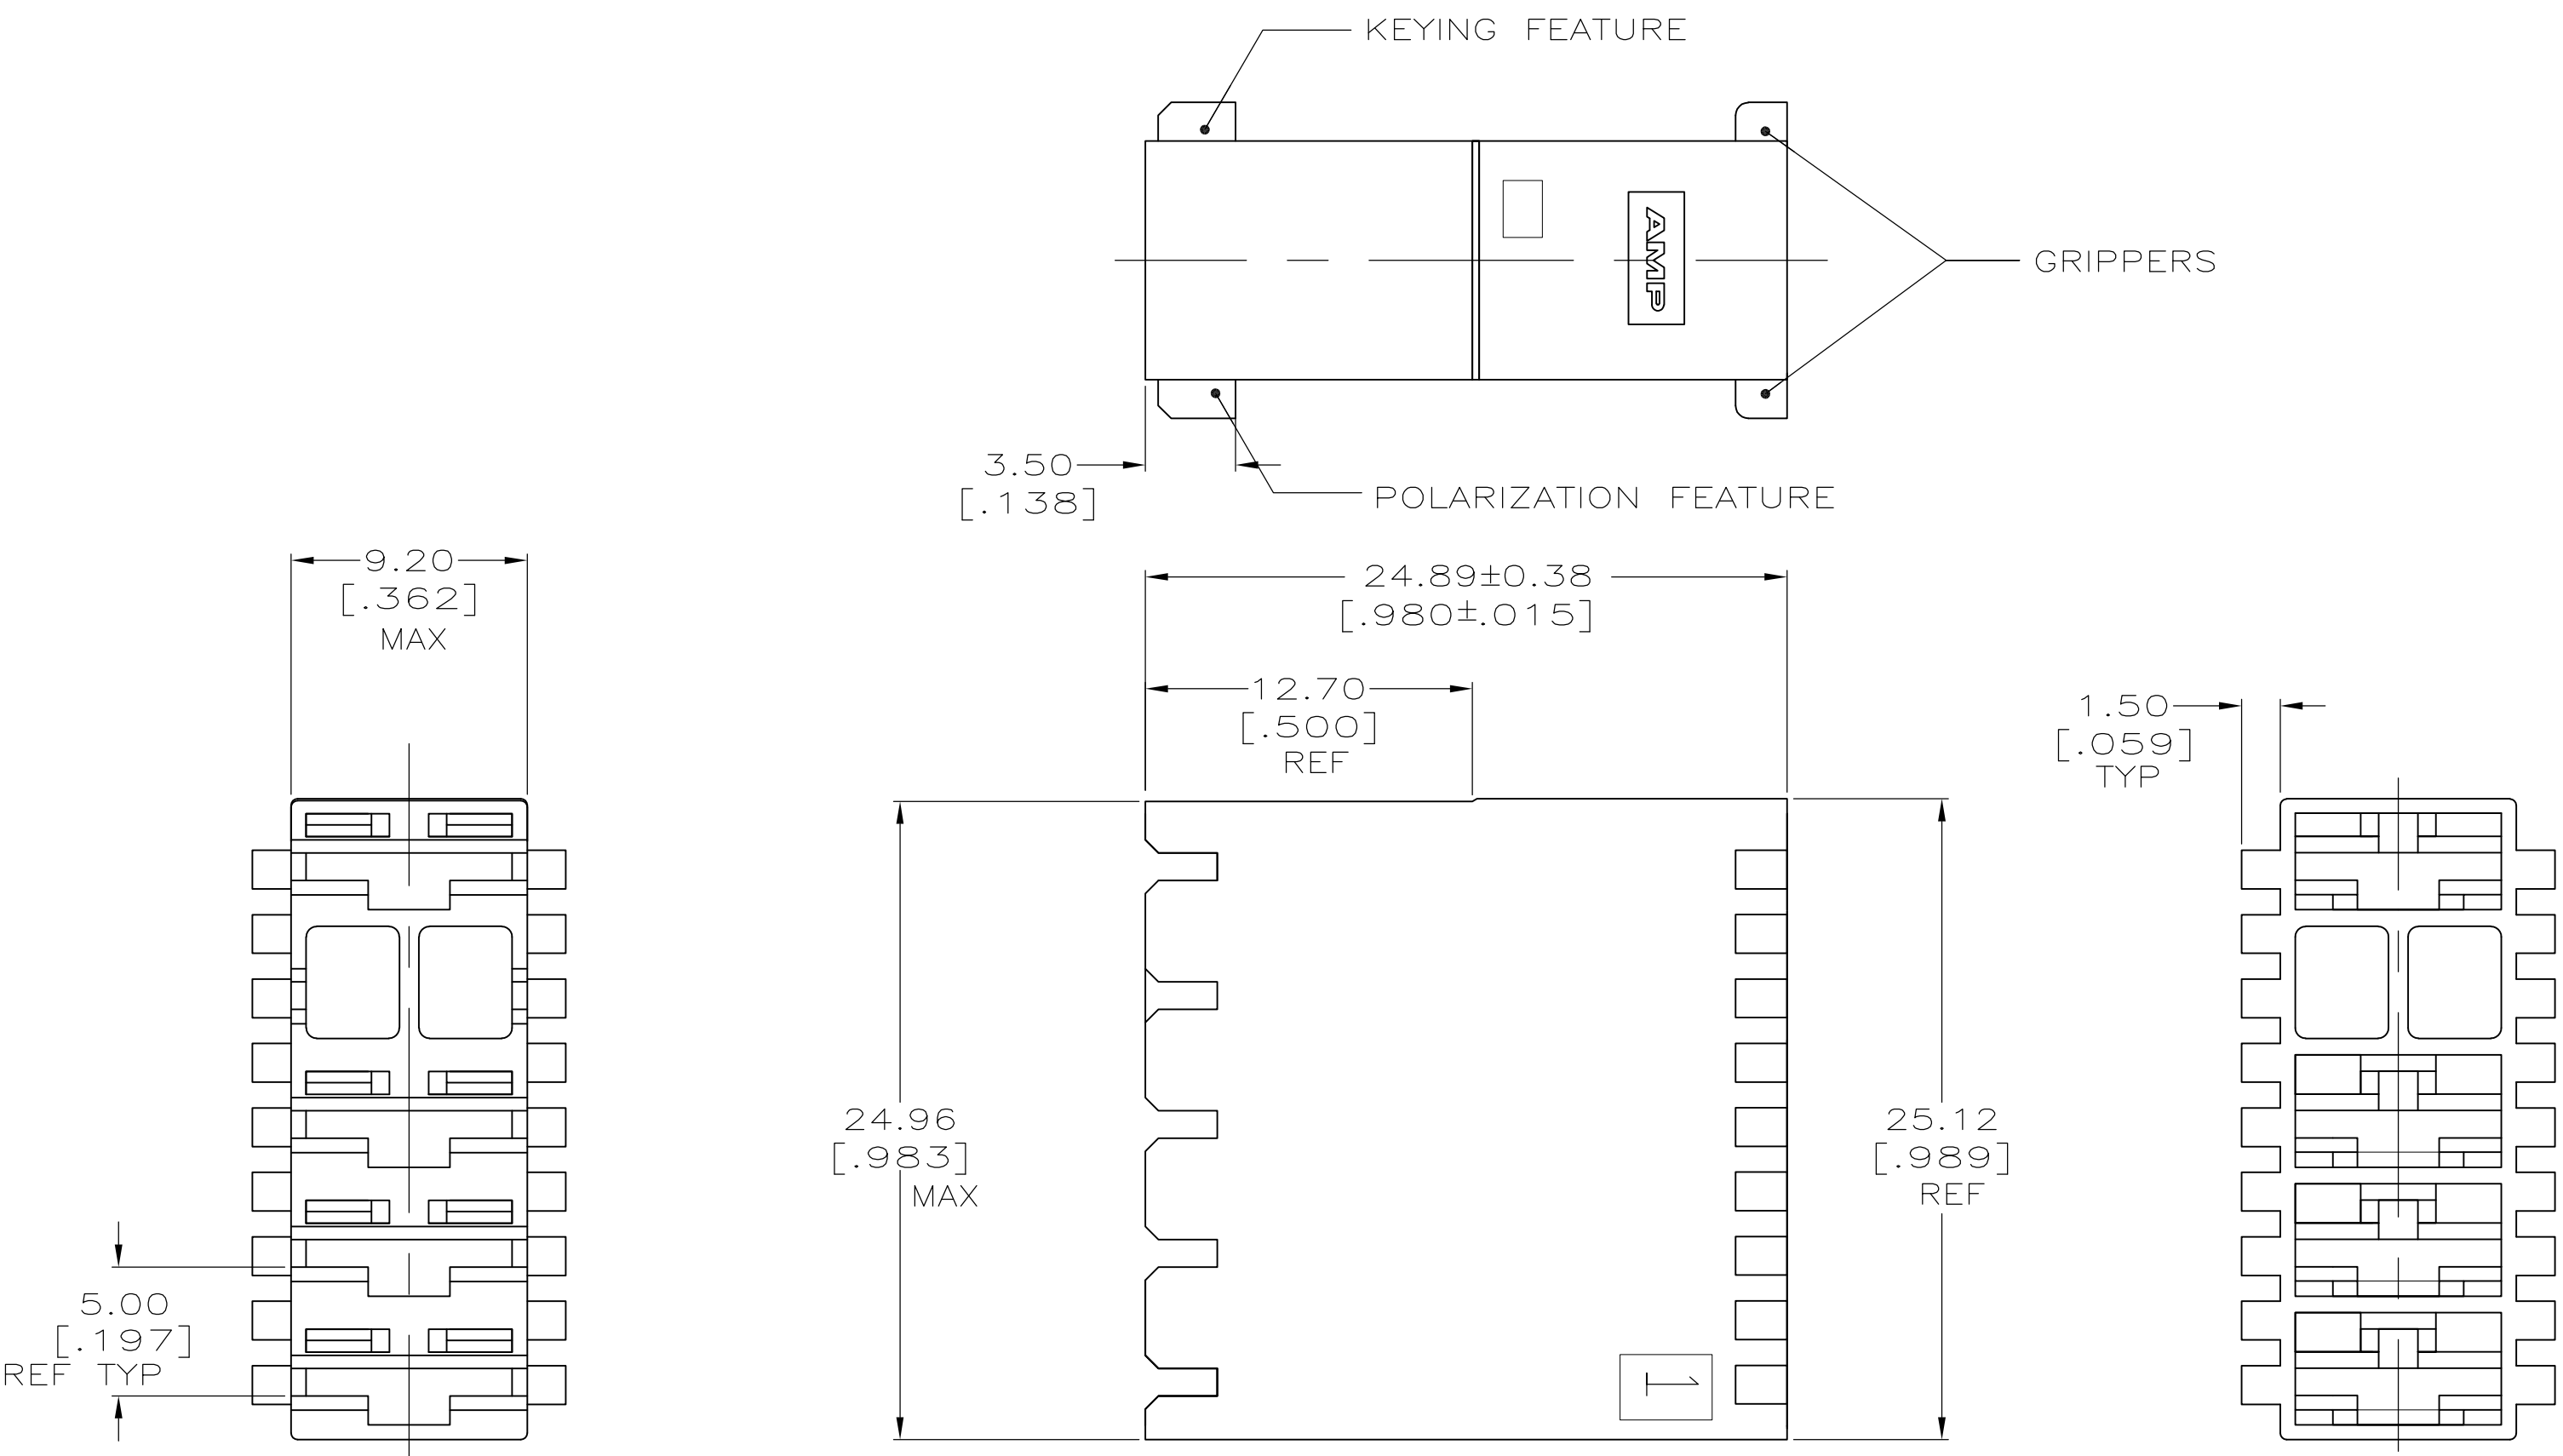

1 ACCEPTS RECEPTACLE CONTACTS 1217378(#18-#22 AWG SINGLE WIRE), 1217094(#18-#14 AWG SINGLE WIRE) AND 1217095 (TWO #18'S OR TWO #16'S OR A #16 + #18 COMBINATION).

2 FRONT AND BACK VIEWS SHOW ONLY THE GRIPPERS. FOR KEYING AND POLARIZATION FEATURES, SEE SPECIAL FRONT VIEW.

3 TAB SHOULDER SLOTS OPTIONAL ON BOTH SIDES OF DUMMY CIRCUIT.

4 PRELIMINARY - NOT FOR PRODUCTION

TBD	NONE	NONE	4 521267-2
4	NONE	NONE	521267-1
BLOCKED CIRCUIT	POLARIZATION FEATURES	KEYING FEATURE	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH	14FEB00	 TE Connectivity HOUSING, RECEPT, POSITIVE-LOCK, MKIII, 6.35[.250] SERIES, 5 POSITION/4 CIRCUIT
DIMENSIONS: mm		CHK	MS FEHER	14FEB00	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	D BRATINA	14FEB00	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 [.010] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC			
MATERIAL	NYLON	FINISH	BLUE	APPLICATION SPEC	114-2074
		WEIGHT	0	SIZE	A2
		CUSTOMER DRAWING		CAGE CODE	00779
				DRAWING NO	C=521267
				RESTRICTED TO	-
				SCALE	4:1
				SHEET	1 OF 1
				REV	H