


Pin strip - PST 1,3/ 3-LV-5,0 C1,2 - 1704479

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


Header, nominal current: 14 A, rated voltage (III/2): 400 V, number of positions: 3, pitch: 5 mm, Color: black, contact surface: Tin, mounting: THR soldering, The pin strip is made of highly temperature-resistant plastic and is therefore suitable for the reflow process.



The figure shows a 10-position version of the product

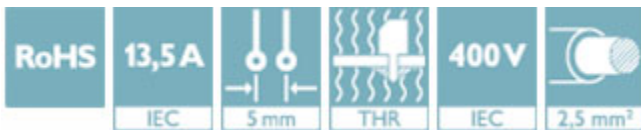

Key Commercial Data

Packing unit	1
GTIN	 4 017918 995072
GTIN	4017918995072
Custom tariff number	85366990

Technical data

Dimensions

Length [l]	10.8 mm
Pitch	5 mm
Dimension a	10 mm
Constructional height	11.2 mm
Length of the solder pin	3.5 mm
Pin dimensions	1,3 mm
Hole diameter	1.5 mm

General

Range of articles	PST 1,3/..-LV
Insulating material group	IIIb
Rated surge voltage (III/3)	4 kV

Pin strip - PST 1,3/ 3-LV-5,0 C1,2 - 1704479

Technical data

General

Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/3)	250 V
Rated voltage (III/2)	400 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current I _N	13.5 A (depends on the plug used)
Maximum load current	13.5 A (depends on the plug used)
Insulating material	PA
Flammability rating according to UL 94	V0
Color	black
Number of positions	3

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637

Pin strip - PST 1,3/ 3-LV-5,0 C1,2 - 1704479

Classifications

ETIM

ETIM 6.0	EC002637
----------	----------

UNSPSC

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	34131203
UNSPSC 12.01	39121432
UNSPSC 13.2	39121409

Approvals


Approvals


Approvals


UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
	B	D	
Nominal current IN	10 A	10 A	
Nominal voltage UN	300 V	300 V	

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
	B	D	
Nominal current IN	10 A	10 A	
Nominal voltage UN	300 V	300 V	

EAC		B.01742
-----	-------------------------------------------------------------------------------------	---------

Pin strip - PST 1,3/ 3-LV-5,0 C1,2 - 1704479

Approvals

cULus Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>