
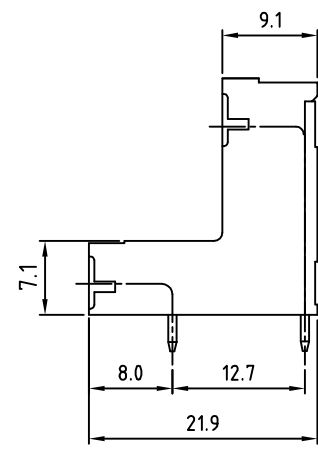
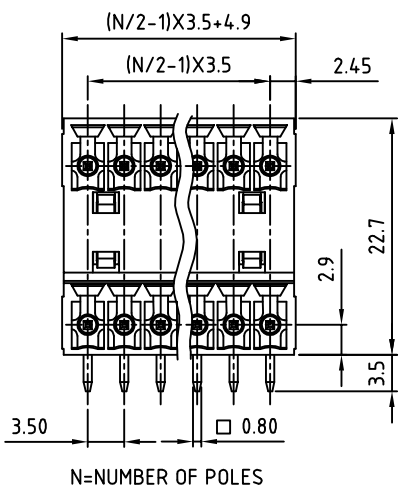


SIGN	DATE	DESCRIPTION	APPROVER



**Material**

- Contact: Brass With Tin Plated
- Insulator (housing): Thermoplastic (UL94V-0)

**Electrical**


- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: US

RoHS Compliant

PART NUMBER:

**OSTVOXX1151**

- No. of Poles →
- 04: 2x02 Poles
  - 06: 2x03 Poles
  - : :
  - 48 2x24 Poles
- COLOR
- 0: Black
  - 5: Green (Standard)
  - 6: Blue
  - 8: Grey

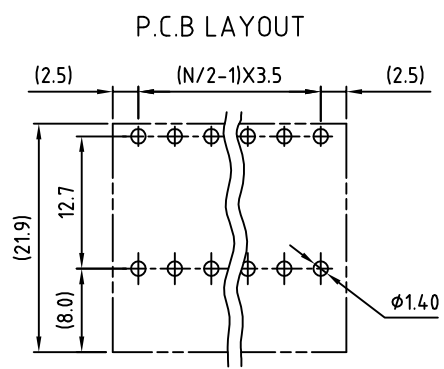

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTV0-3.50mm Series closed right-angle 2x2p-2x24p			
PART NO.	OSTVOXX1151	DWG NO.		OSTVOXX1151.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
Shi Jun 2006.10.23	Marvin 2006.10.23	Marvin 2006.10.23	Marvin 2006.10.23		X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
SHEET: 01/01				UNIT: mm	SCALE: NONE
				REV.: D	