

**FEATURES:**



- I/O Isolation 3000VAC
- Operating Temp: -40°C to +70°C
- Over current Protection
- Input: 85-305VAC, 47-63Hz, or 100-430VDC
- Low Ripple and Noise
- Over Voltage Protection
- Up to 82% efficiency
- Short Circuit Protection



**Models**  
**Single output**

| Model        | Input Voltage (VAC/Hz) | Input Voltage (VDC) | Max Output wattage (W) | Output Voltage (V) | Output Current max (A) | Maximum capacitive load (μF) | Efficiency (%) |
|--------------|------------------------|---------------------|------------------------|--------------------|------------------------|------------------------------|----------------|
|              |                        |                     |                        |                    |                        |                              | 230 VAC        |
| AME10-3.3SJZ | 85-305/47-63           | 100-430             | 6.6                    | 3.3                | 2                      | 26000                        | 70             |
| AME10-5SJZ   | 85-305/47-63           | 100-430             | 10                     | 5                  | 2                      | 9400                         | 76             |
| AME10-9SJZ   | 85-305/47-63           | 100-430             | 10                     | 9                  | 1.1                    | 3600                         | 78             |
| AME10-12SJZ  | 85-305/47-63           | 100-430             | 10                     | 12                 | 0.9                    | 2400                         | 80             |
| AME10-15SJZ  | 85-305/47-63           | 100-430             | 10                     | 15                 | 0.7                    | 1200                         | 81             |
| AME10-24SJZ  | 85-305/47-63           | 100-430             | 10                     | 24                 | 0.45                   | 370                          | 82             |

**Note:**  
\*Add suffix “-ST” for optional screw terminal bottom plate, add suffix “-STD” for optional DIN Rail screw terminal bottom plate

**Input Specifications**

| Parameters                       | Conditions                 | Typical | Maximum | Units |
|----------------------------------|----------------------------|---------|---------|-------|
| Current (full load)              | 115 VAC                    |         | 260     | mA    |
|                                  | 230 VAC                    |         | 160     | mA    |
| Inrush current <2ms (cold start) | 115 VAC                    | 10      |         | A     |
|                                  | 230 VAC                    | 15      |         | A     |
| Leakage current                  |                            |         | 0.25    | mA    |
| External fuse                    | Recommended slow blow type | 2       |         | A     |

**Output Specifications**

| Parameters       | Conditions   | Typical | Maximum | Units  |
|------------------|--------------|---------|---------|--------|
| Voltage accuracy |              | ±2      |         | %      |
| Line regulation  | (LL-HL)      | ±0.5    |         | %      |
| Load regulation  | 10-100% load | ±1      |         | %      |
| Ripple & Noise   |              |         | 100     | mV p-p |
| Hold-up time     | 115 VAC      | 15      |         | ms     |
|                  | 230 VAC      | 80      |         | ms     |

**Isolation Specifications**

| Parameters           | Conditions              | Typical | Rated | Units |
|----------------------|-------------------------|---------|-------|-------|
| Tested I/O voltage   | Input to Output, 60 sec |         | 3000  | VAC   |
|                      | Input to Ground         |         | 2000  |       |
| Isolation resistance |                         | >1000   |       | MΩ    |

**General Specifications**

| Parameters               | Conditions         | Typical           | Maximum | Units     |
|--------------------------|--------------------|-------------------|---------|-----------|
| Switching frequency      |                    | 100               |         | KHz       |
| Over current protection  |                    | ≥110              |         | % of Iout |
| Over voltage protection  |                    | Zener Diode Clamp |         |           |
| Short circuit protection |                    | Auto recovery     |         |           |
| Operating temperature    | See derating curve | -40 to +70        |         | °C        |

|                          |             |     |        |
|--------------------------|-------------|-----|--------|
| Maximum case temperature |             | 100 | °C     |
| Storage temperature      | -40 to +105 |     | °C     |
| Temperature coefficient  | ±0.02       |     | % / °C |

### General Specifications (continued)


| Parameters             | Conditions   | Typical   | Maximum | Units |
|------------------------|--|---|---------|-------|
| Cooling                |  | Free air convection                               |         |       |
| Humidity               | Non condensing   |   | 95      | % RH  |
| Case material          |  | Plastic (flammability to UL 94V-0)                |         |       |
| Weight                 | Pin mountable  | 75  |         | g     |
|                        | Screw terminal bottom plate                                      | 125   |         |       |
|                        | DIN Rail screw terminal bottom plate                             | 165   |         |       |
| Dimensions (L x W x H) | Pin mountable  | 55.0 x 45.0 x 21.0 mm (2.17 x 1.77 x 0.83 inches) |         |       |
|                        | Screw terminal bottom plate                                      | 96.1 x 54.0 x 29.5 mm (3.78 x 2.13 x 1.16 inches) |         |       |
|                        | DIN Rail screw terminal bottom plate                             | 96.1 x 54.0 x 34.1 mm (3.78 x 2.13 x 1.34 inches) |         |       |
| MTBF                   | > 300 000 hrs (MIL-HDBK -217F, t <sub>a</sub> =+25°C)/ Full Load |   |         |       |

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage (115/230VAC) and at rated output load unless otherwise specified.

### Safety Specifications


| Parameters       |  |  |
|------------------|--|--|
| Agency approvals | CE, UL                                     |  |
| Standards        | Information Technology Equipment           | IEC/EN/UL 60950-1                                |
|                  | EMI - Conducted and radiated emission      | EN55022, class B<br>EN55024: 2010                |
|                  | Electrostatic Discharge Immunity           | IEC 61000-4-2: Contact ±6KV/Air ±8KV, Criteria B |
|                  | RF, Electromagnetic Field Immunity         | IEC 61000-4-3: 10V/m, Criteria A                 |
|                  | Electrical Fast Transient/Burst Immunity   | IEC 61000-4-4: ±2KV, Criteria B                  |
|                  | Surge Immunity                             | IEC 61000-4-5: ±1KV/±2KV, Criteria B             |
|                  | RF, Conducted Disturbance Immunity         | IEC 61000-4-6: 10Vrms, Criteria A                |
|                  | Power frequency Magnetic Field Immunity    | IEC 61000-4-8: 10A/m, Criteria A                 |
|                  | Voltage dips, Short Interruptions Immunity | IEC 61000-4-11: 0-70%, Criteria B                |

### Typical Application circuit

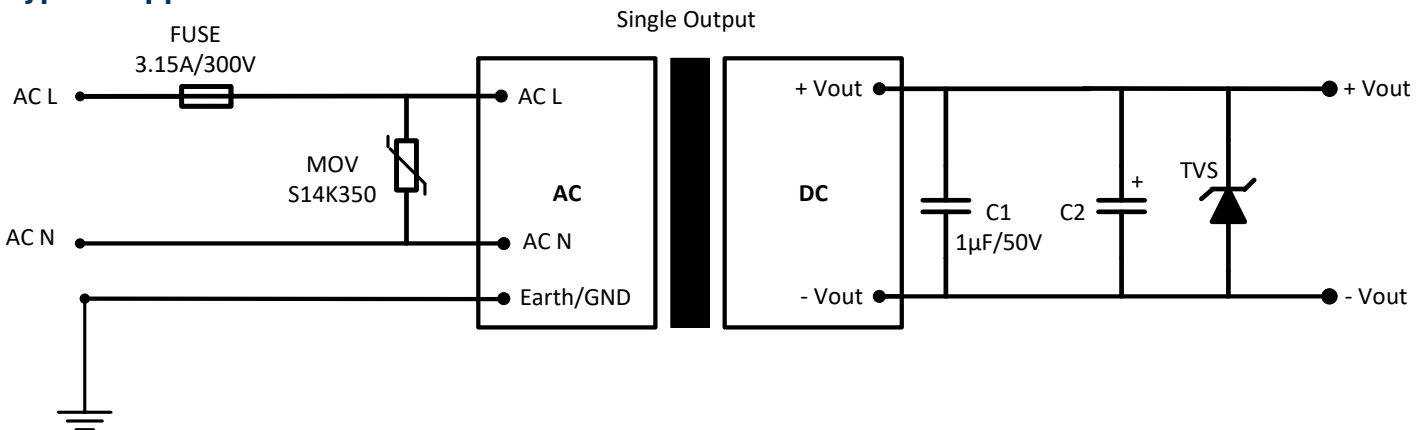

| Vout     | C2         | TVS |
|----------|------------|-----|
| 3.3V     | 470 µF/50V | 7A  |
| 5V       | 330 µF/50V | 7A  |
| 9V       | 120 µF/50V | 12A |
| 12 & 15V | 120 µF/50V | 20A |
| 24V      | 68 µF/50V  | 30A |


### Dimensions

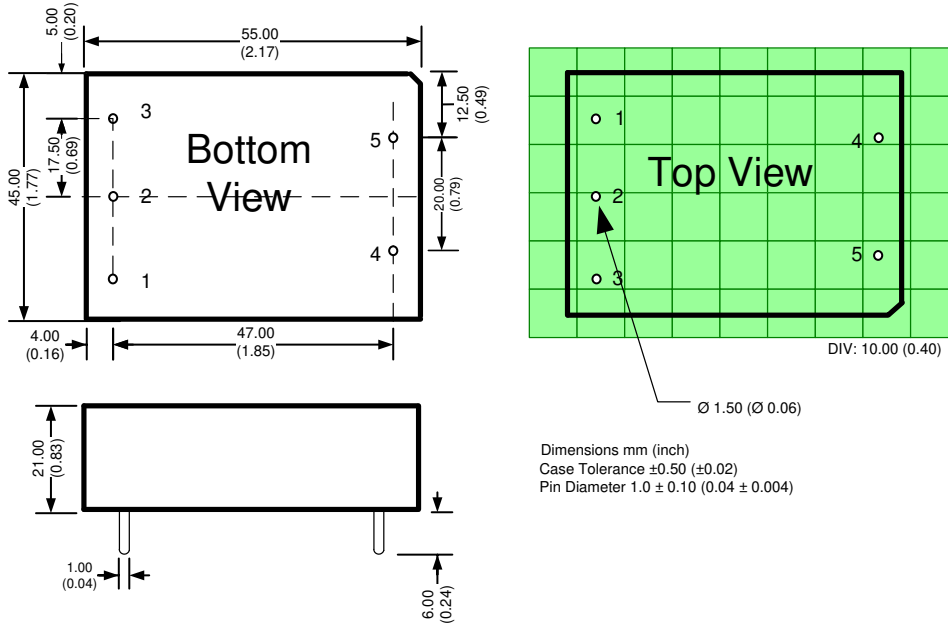

### Pin Out Specifications

| Pin | Single       |
|-----|--------------|
| 1   | Earth/Ground |
| 2   | AC Input (N) |
| 3   | AC Input (L) |
| 4   | - V output   |
| 5   | + V output   |

### Dimensions with optional ST model

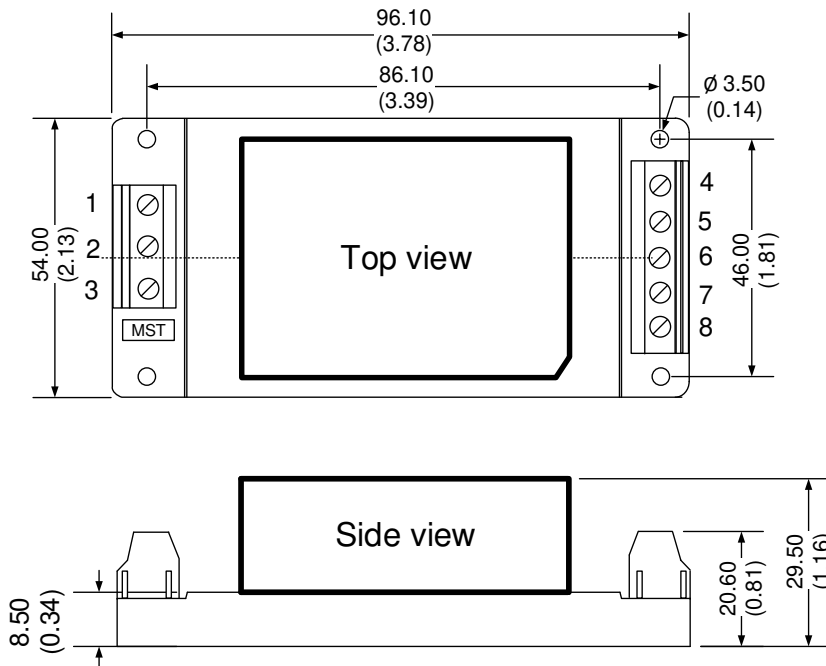


### Pin Out Specifications

| Pin | Single        |
|-----|---------------|
| 1   | Earth/Ground  |
| 2   | AC Input (N)  |
| 3   | AC Input (L)  |
| 4   | - V output    |
| 5   | No Connection |
| 6   | No Connection |
| 7   | No Connection |
| 8   | + V output    |

Dimensions: mm (inch)  
 Case Tolerance:  $\pm 1.00$  (0.04)  
 Holding holes tolerance:  $\pm 0.20$  (0.01)  
 Wire gauge: 24-12AWG

### Dimensions with optional STD model


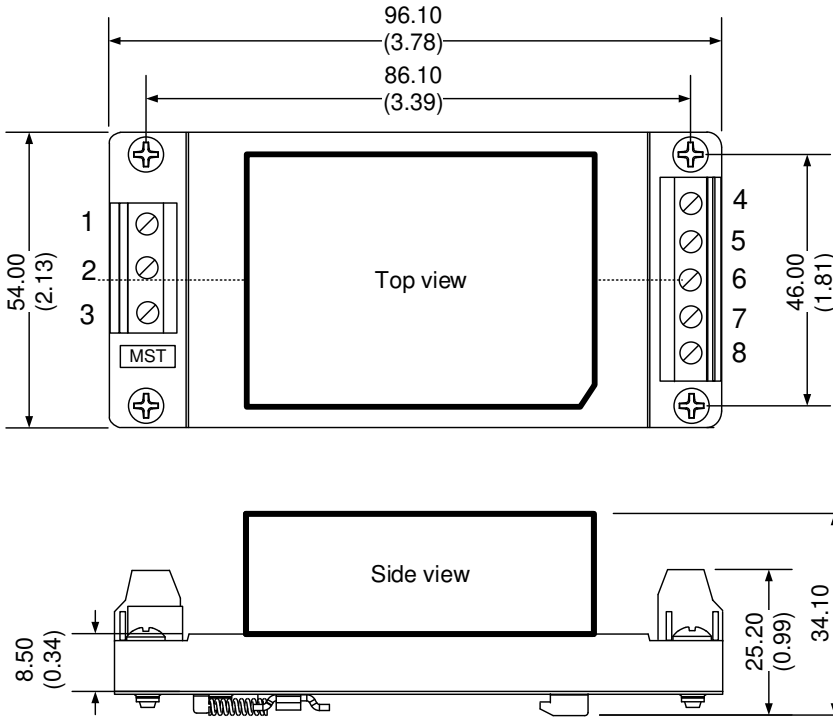


### Pin Out Specifications

| Pin | Single        |
|-----|---------------|
| 1   | Earth/Ground  |
| 2   | AC Input (N)  |
| 3   | AC Input (L)  |
| 4   | - V output    |
| 5   | No Connection |
| 6   | No Connection |
| 7   | No Connection |
| 8   | + V output    |

Dimensions: mm (inch)  
 General Tolerance:  $\pm 1.00$  (0.04)  
 Holding holes tolerance:  $\pm 0.20$  (0.01)  
 Wire gauge: 24-12AWG  
 DIN rail type: TS35

### Derating

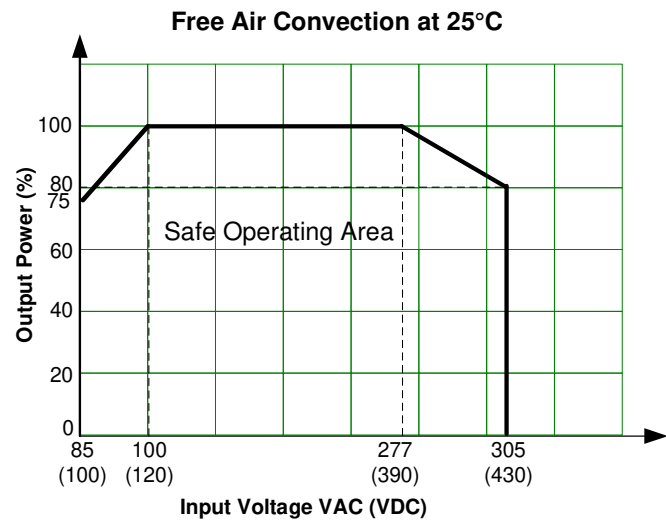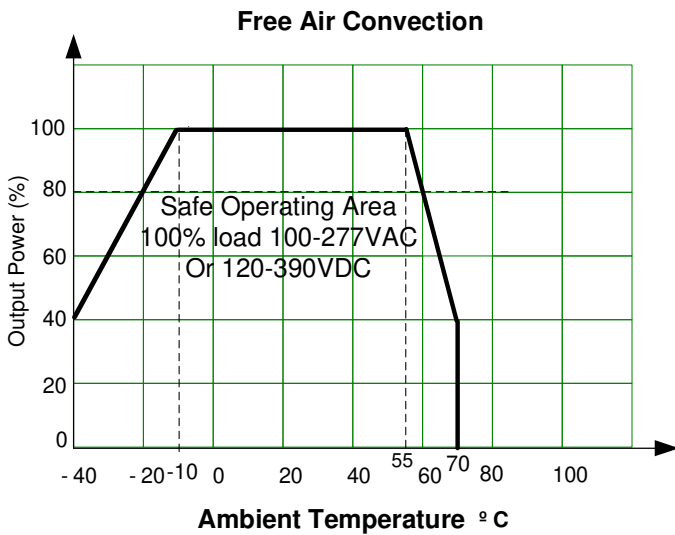

**NOTE:** **1.** Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).