


| 插頭部件 (Plug Component) | | | 頭部剥皮尺寸 (Plug strip dimension) | | | 線材規格(Wire Spec.) | 尾部剥皮尺寸 (Terminal roj & Strip) | | | 尾部處理 (Terminal Component) | | |
|--------------------------|----------------------------------|----------|----------------------------------|---------|------------|--|----------------------------------|-------------------------------|------------|---|-----------------------|----------|
| 顏色(Color) | 零件描述(Component) | 數量(Q'ty) | 內剝(Strip) | 外剝(Roj) | 顏色(Color) | SJT 16AWG/3C 105°C 灰色(Gray) 線長: (Length) 1854.2 ^{+50.8} _{-12.7} | 外剝(Roj) | 內剝(Strip) | 顏色(Color) | 零件描述(Component) | 顏色(Color) | 數量(Q'ty) |
| 35P透明 90A±2A Clear | FM-2 (13A 125V-) (NEMA5-15P) | 1 | 10±1 | 60±2 | 黑/Black(L) | | 15±1 | 5 ⁺¹ ₋₀ | 黑/Black(L) | ME-302 (13A 125V-) (IEC 320 C13) 電腦電源線端子 | 35P透明 90A±2A Clear | 1 |
| 鍍鎳 Nickel-Plated | 4.75 U型圓管 4.75 Grounding | 1 | 10±1 | 60±2 | 白/White(N) | | 15±1 | 5 ⁺¹ ₋₀ | 白/White(N) | Computer power cord terminals 302兩件式內模 (302 Inner Body) | 銅本色(Copper) | 3 |
| 鍍鎳 Nickel-Plated | 6.3*1.5 單片圓頭端子 (Solid Blades) | 2 | 20±1 | 75±2 | 綠/Green(E) | | 15±1 | 5 ⁺¹ ₋₀ | 綠/Green(E) | | 白色(White) | 1 |
| 鍍鎳 Nickel-Plated | 墊片 (Gasket) | 3 | | | | | | | | | | |

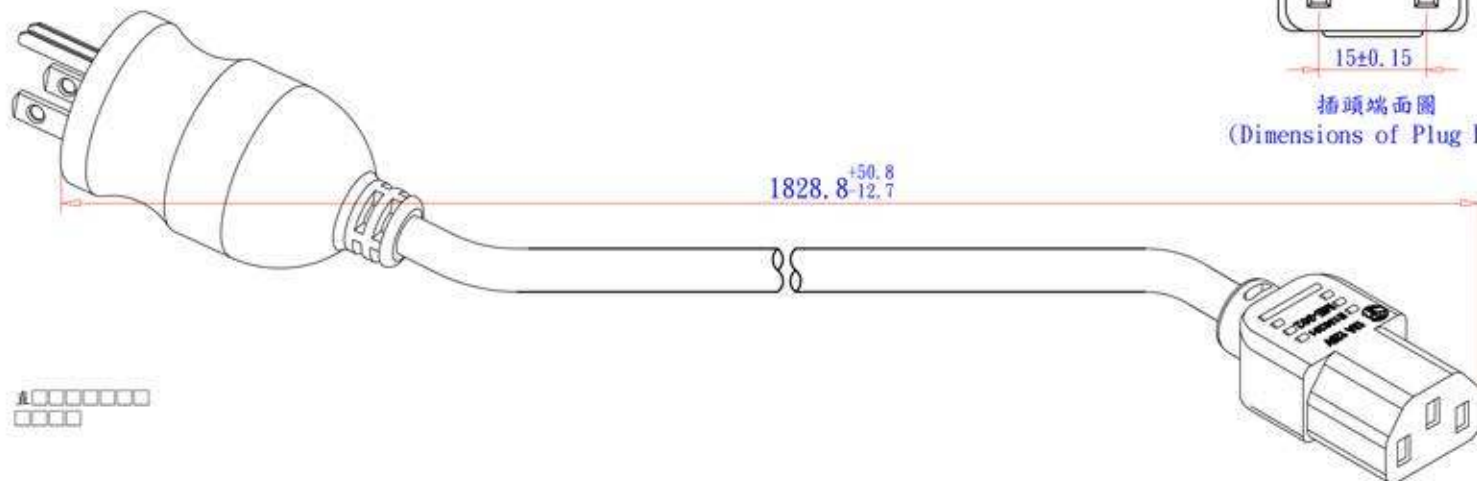

插頭端面圖
(Dimensions of Plug Face)

插頭端面圖
(Dimensions of Plug Face)


包裝方式(Packing)

| | |
|-------------------------------------|-----------------------------|
| 扎線方式 (Bulk Pack) | 每 10 條一扎 Per 10 pcs/Ties |
| 紙箱尺寸 (Carton Size) | 480 X 320 X |
| 包裝數量 (Packing Q'ty) 標籤(Label) | PCS UL Detachable Label |

Insulation Thickness 0.76 mm
Overall Diameter 3.05±0.10 mm

Copper Conductor
26/0.254±0.004 mm
Resistance 14.1
(20°C (Max). ohms/km)

Jacket Thickness 0.76mm
Overall Diameter 8.5±0.15mm



線材截面圖
(Wire Cross-Section)

正側事項
(Carton Print) 依客戶要求印刷
(See Purchase Order) 1. 高壓測試: 1500V/1Sec <1mA
(Hi-Pot Test: 1500v/1Sec <1mA)

| | | |
|---|-------------------------------------|-------------------------|
| 電線印字內容 Wire Printed | 使用克實 線材 凹印字 (In-Filler, Gravure) | 紙箱字頭標註 Shipping Mark |
| V E322763 (UL) SJT 16AWG(1.31mm ²)x3C VW-1 105°C 300V JIT c(UL) SJT 16AWG(1.31mm ²)x3C FT2 105°C 300V -1F- (UL) SJT 16AWG(1.31mm ²)x3C VW-1 105°C 300V E77975 WONDERFUL-D CSA SJT 16AWG(1.31mm ²)x3C FT2 105°C 300V LL43774 -F- -1F- | | ◇ CnC ◇ |

| | | | | | |
|---|------|------------|--------------|---------------------|-------------|
| SIGNATURE | NAME | DATE | | | |
| APPROVED | | | | | |
| M.F.G. CHECKED | | | 2011 1128 | 新版發行 | 楊承正 |
| Q.A. CHECKED | | | REV | DATE | DESCRIPTION |
| DRAWN | 楊承正 | 2011/11/28 | PART No. | 800-16-00D-GR-0006F | |
| CUSTOMER | | | DWG No. | | |
| CnC Tech, LLC Industrial Cable and Connector Technology | | | | | |