

## CCMR Series POWR-PRO® Fuses

**POWR-PRO®** 600 VAC • Dual Element • Time-Delay •  $2/_{10}$ -60 Amperes



### Specifications

<b>Voltage Ratings:</b>	AC:	600 V
	DC:	250 V (CCMR $2/_{10}$ -2 A) (CCMR $4\frac{1}{2}$ -10 A) (CCMR 35-60 A) 300 V (CCMR $2\frac{1}{4}$ -4 A) 500 V (CCMR 12-30 A)
<b>Interrupting Ratings:</b>	AC:	200 kA rms symmetrical 300 kA Littelfuse self-certified
	DC:	20 kA
<b>Ampere Range:</b>		$2/_{10}$ -60 A
<b>Approvals:</b>	AC:	Standard 248-4, Class CC UL Listed $1/_{10}$ -30 A (File No. E81895) Standard 248, Class CD UL Listed 35-60 A (File No. E81895) CSA Certified $1/_{10}$ -30 A (File No. LR29862)
	DC:	Littelfuse self-certified

### Description

The CCMR series is ideal for space saving protection of motors up to 40 hp\*. It was designed specifically to withstand sustained starting currents of small motors. The CCMR 60 fuse is the smallest 60 A fuse available rated at 600 V. Compared to other UL Listed fuses, Class CC fuses are the most current-limiting, rating for rating.

### Applications

- Motor and motor branch circuit protection

### Features/Benefits

- POWR-PRO Performance
- Extremely current-limiting
- Ratings up to 60 Amps
- 300 kA Interrupting Rating (self-certified)

### Ordering Information

AMPERE RATINGS						
$2/_{10}$	1	2	$3\frac{1}{2}$	$6\frac{1}{4}$	12	35
$1/4$	$1\frac{1}{4}$	$2\frac{1}{4}$	4	7	15	40
$3/_{10}$	$1\frac{4}{10}$	$2\frac{1}{2}$	$4\frac{1}{2}$	$7\frac{1}{2}$	$17\frac{1}{2}$	45
$1/2$	$1\frac{1}{2}$	$2\frac{8}{10}$	5	8	20	50
$6/_{10}$	$1\frac{6}{10}$	3	$5\frac{6}{10}$	9	25	60
$8/_{10}$	$1\frac{8}{10}$	$3\frac{2}{10}$	6	10	30	

SERIES	AMPERAGE	CATALOG NUMBER	SYSTEM NUMBER
CCMR	45	CCMR045	CCMR045.T

### Web Resources


TC Curves, downloadable CAD drawings and other technical information: [www.littelfuse.com/ccmr](http://www.littelfuse.com/ccmr)

### Recommended Fuseholders

LPSC Series  
L60030C Series  
L60060C Series

# CCMR Series POWR-PRO® Fuses

## Dimensions in inches (mm)

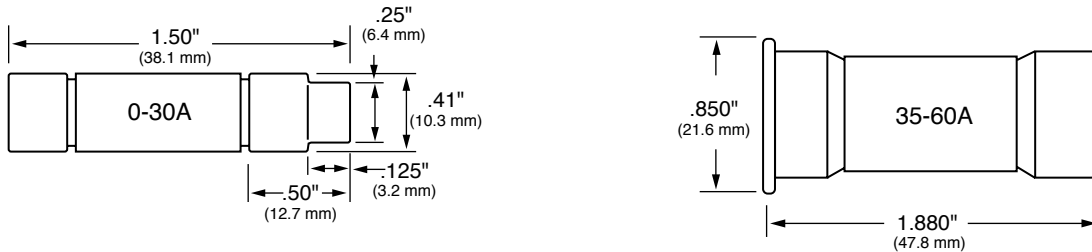

## Current-Limiting Effects of CCMR (600 V) fuses

SHORT CIRCUIT CURRENT*	APPARENT RMS SYMMETRICAL CURRENT FOR VARIOUS FUSE RATINGS							
	2 A	4 A	6¼ A	10 A	12 A	15 A	20 A	30 A
5,000	160	190	330	370	525	600	625	750
10,000	180	220	400	440	600	700	725	875
15,000	200	250	430	480	675	775	800	950
20,000	220	260	460	520	720	825	850	1,000
25,000	230	280	480	550	750	850	900	1,050
30,000	240	290	500	570	800	900	950	1,125
35,000	245	300	520	590	825	925	975	1,175
40,000	255	310	550	600	850	975	1,000	1,200
50,000	260	330	570	640	875	1,000	1,100	1,300
60,000	280	340	600	670	900	1,050	1,125	1,350
80,000	300	360	625	700	1,000	1,125	1,200	1,400
100,000	310	380	650	750	1,050	1,200	1,250	1,500
150,000	340	420	700	800	1,150	1,300	1,400	1,600
200,000	350	440	750	850	1,200	1,400	1,450	1,750

\*Prospective RMS Symmetrical Amperes Short-Circuit Current  
Note: Data Derived from Peak Let-Thru Curves

**Peak Let-Thru Curve CCMR**

