



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00039	Connector, stereo jack, 3.5x8.0xL24.7 mm, brass, nickel plated, molding style	1	
2	30-01374	Wire, 2C, BC, 28 AWG, 300V, 80C, 4.3 mm, shielded, PVC, nylon braid	1	
3	24-00036	Overmold, stereo audio jack, Ø11xL45	1	black, PVC
4	Heat shrink	Heat shrink, black	1	covers end of jacket
5	Heat shrink	Heat shrink, black	1	covers shield

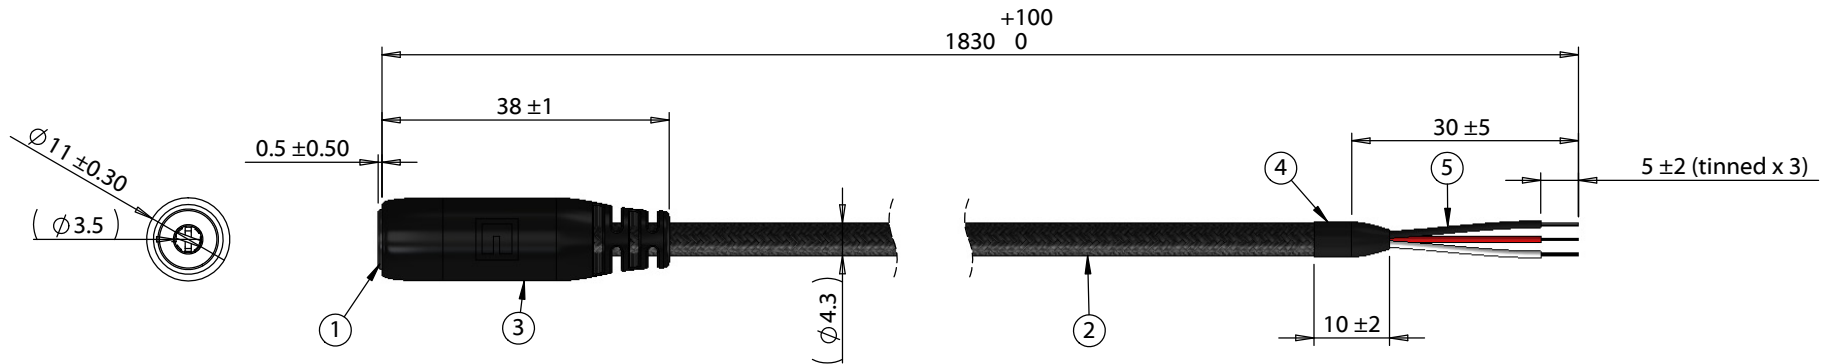

Wiring Diagram	
50-00039	wire color
A	red
B	white
C	shield

**Notes:**  
Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	8/10/2020	Initial release	JC <small>Digitally signed by JC Date: 2020.08.10 14:38:21 -07'00'</small>		
			Verified:	Function test: no open, no short circuit, no intermittent	Size: Part number:
			AW <small>Digitally signed by AW Date: 2020.08.10 15:40:45 -07'00'</small>	Description:	A 10-03721
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 1830 mm, 3.5 mm 3C 50-00039 audio jack to 5 mm tinned, 28 AWG, 30-01374 wire, nylon braided	Scale: 1:1
					Sheet 1 of 1

5

4

3

2

1