

**Series: Embedded Antenna** 

**Description**: LTE SNAP-ON ANTENNA


698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

PART NUMBER: CLA-W3796P



## Features:

- 698-2700MHz
- Easy snap-on mounting onto radio PCB
- Transparent plastic carrier
- C-clip contacts on radio board

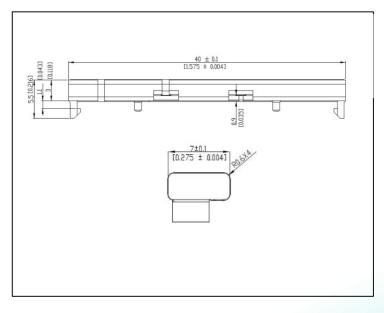

# **Applications:**

- 2G, 3G, 4G LTE
- M2M, IoT
- High speed data devices
- Security, Transportation
- Gateways, Set top boxes

All dimensions are in mm / inches

Issue: 1611

In the effort to improve our products, we reserve the right to make changes judged to be necessary.  $\texttt{CONFIDENTIAL} \ \texttt{AND} \ \texttt{PROPRIETARY} \ \texttt{INFORMATION}$ 

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 3611 NE 112<sup>th</sup> Ave Vancouver, WA 98682 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



**Series: Embedded Antenna** 

**Description**: LTE SNAP-ON ANTENNA

698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

PART NUMBER: CLA-W3796P

## **ELECTRICAL SPECIFICATIONS**

Frequency	698-960 / 1427.9-1660.5/ 1695-2200 / 2300-2700MHz
Nominal Impedance	$50~\Omega$
VSWR	3.5:1 @1427.9-1660.5MHz 3:1 @ the others band
Return Loss	-5dB @1427.9-1660.5MHz -6dB @ the others band
Average Total Efficiency (698-960MHz) Average Total Efficiency (1427.9-1660.5MHz) Average Total Efficiency (1695-2200MHz) Average Total Efficiency (2300-2700MHz)	60% 45% 70% 70%
Average Peak Gain (698-960MHz) Average Peak Gain (1427.9-1660.5MHz) Average Peak Gain (1695-2200MHz) Average Peak Gain (2300-2700MHz)	0.4 dBi 1.5 dBi 3.0 dBi 5.2 dBi
Average Gain (698-960MHz) Average Gain (1427.9-1660.5MHz) Average Gain (1695-2200MHz) Average Gain (2300-2700MHz)	-2.0 dBi -3.1 dBi -1.5 dBi -1.5 dBi
Maximum power input	5W





**Series: Embedded Antenna** 

**Description**: LTE SNAP-ON ANTENNA

698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

PART NUMBER: CLA-W3796P

## **MECHANICAL SPECIFICATIONS**

Plastic

Color Clarity

Weight 2 g

Fixing system 2 snaps

# **ENVIRONMENTAL SPECIFICATIONS**

Operating temperature

-40 ~ +85° C




**Series: Embedded Antenna** 


**Description**: LTE SNAP-ON ANTENNA


698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

PART NUMBER: CLA-W3796P

# **MECHANICAL DRAWING**

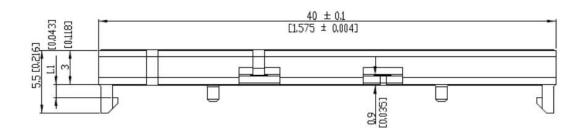



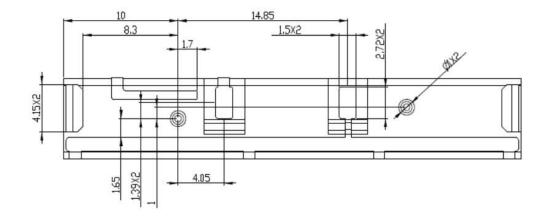




**Series: Embedded Antenna** 

# **Description**: LTE SNAP-ON ANTENNA


698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

PART NUMBER: CLA-W3796P

# **OTHER SPECIFICATIONS**

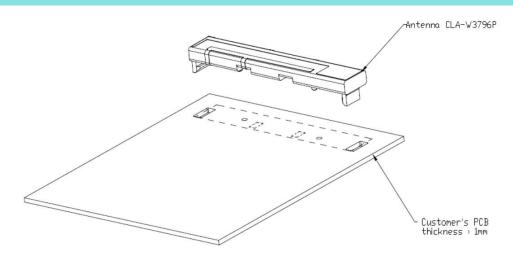

Antenna CLA-W3796P Mounting on customer's PCB by 2 snaps.

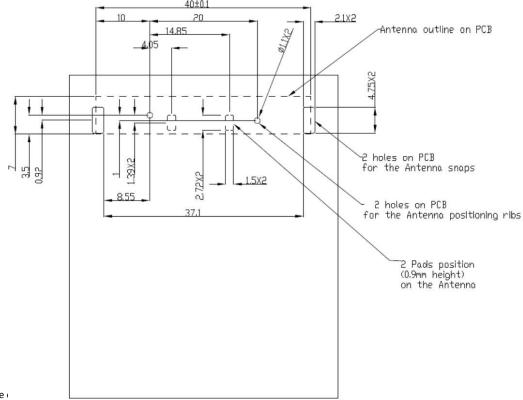

ROHS

Issue: 1611



**Series: Embedded Antenna** 


**Description**: LTE SNAP-ON ANTENNA

698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

PART NUMBER: CLA-W3796P

# **OTHER SPECIFICATIONS**

# Pulse reference test PCB for W3796 antenna

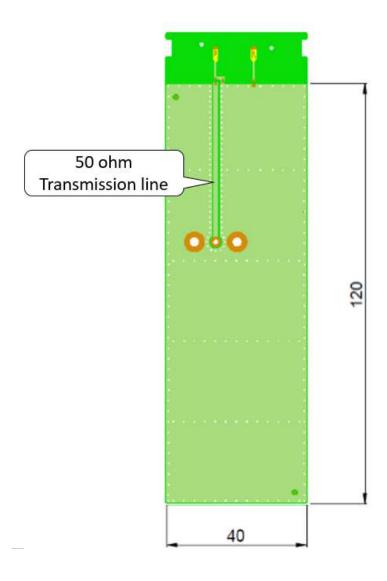

Ground plane dimensions



**Series: Embedded Antenna** 

**Description**: LTE SNAP-ON ANTENNA


698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

PART NUMBER: CLA-W3796P

# **OTHER SPECIFICATIONS**



Ground clearance dimensions (mm) and matching component values

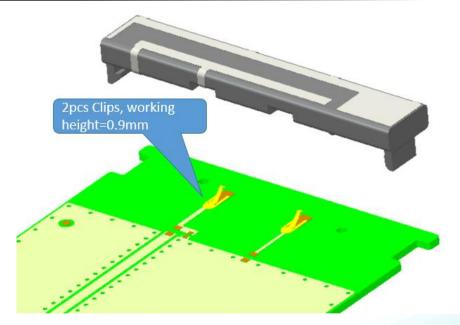

2 clips SMT on PCB to contact the pads on the antenna.



**Series: Embedded Antenna** 


**Description**: LTE SNAP-ON ANTENNA

698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz


PART NUMBER: CLA-W3796P

### **CHARTS**

# Return Loss in free space

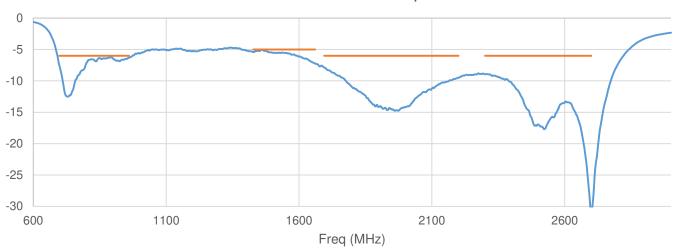

# VSWR in free space

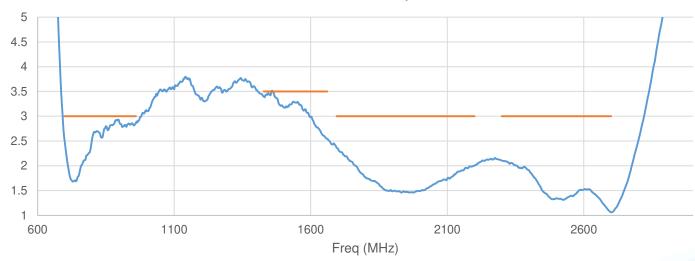

(\*) All RF parameters measured on Pulse reference test PCB

Issue: 1611

ROHS




**Series: Embedded Antenna** 


**Description**: LTE SNAP-ON ANTENNA

698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

PART NUMBER: CLA-W3796P

## **CHARTS**

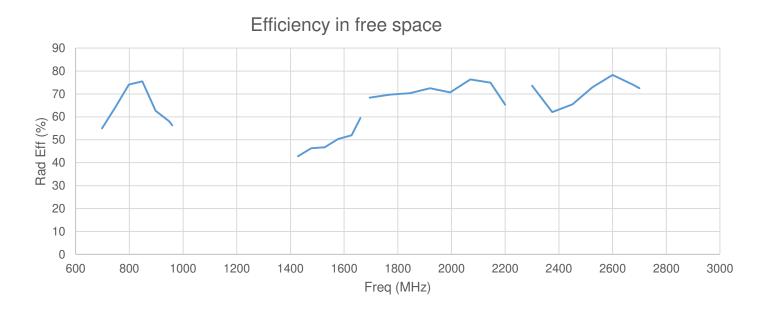

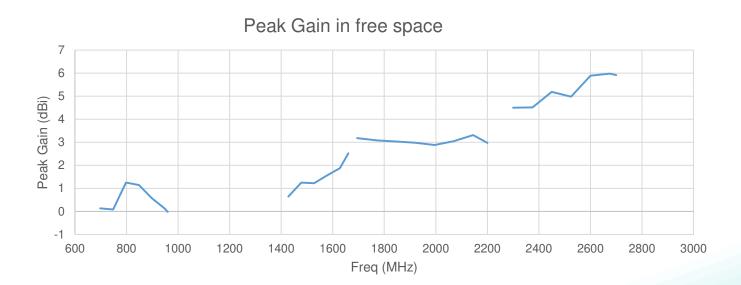

(\*) All RF parameters measured on Pulse reference test PCB



ROHS






**Description**: LTE SNAP-ON ANTENNA

698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

**PART NUMBER: CLA-W3796P** 

# **CHARTS**

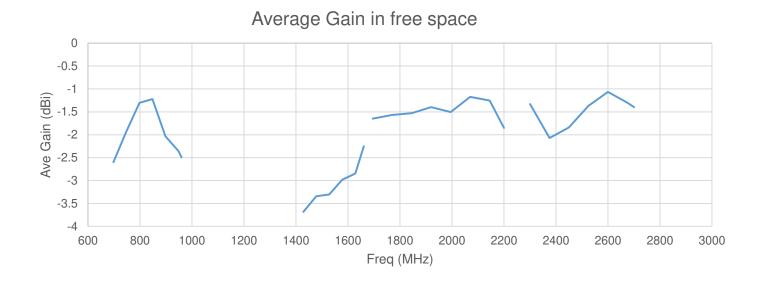








**Description**: LTE SNAP-ON ANTENNA

698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

**PART NUMBER: CLA-W3796P** 

# **CHARTS**

698-960MHz

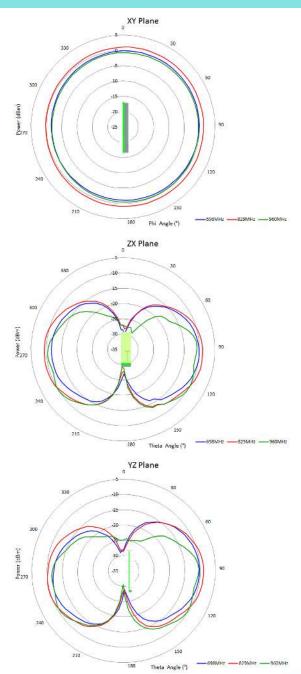






# **Description**: LTE SNAP-ON ANTENNA

698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

PART NUMBER: CLA-W3796P

# **CHARTS**

1427.9-1660.5MHz

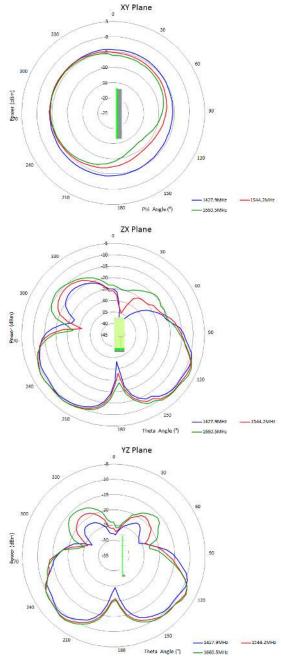



**Series: Embedded Antenna** 


# **Description**: LTE SNAP-ON ANTENNA

698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

PART NUMBER: CLA-W3796P

# **CHARTS**

1695-2200MHz

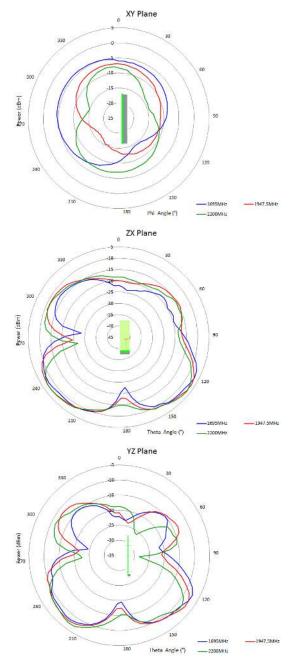






# **Description**: LTE SNAP-ON ANTENNA

698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

**PART NUMBER: CLA-W3796P** 

# **CHARTS**

2300-2700MHz

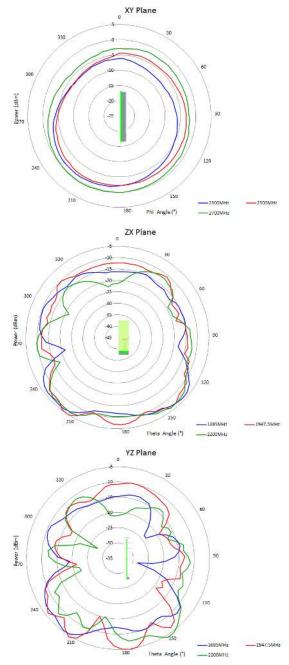




**Series: Embedded Antenna** 


**Description**: LTE SNAP-ON ANTENNA

698-960MHz, 1427.9-1660.5MHz, 1695-2200MHz, 2300-2700MHz

PART NUMBER: CLA-W3796P

# **PACKAGING**

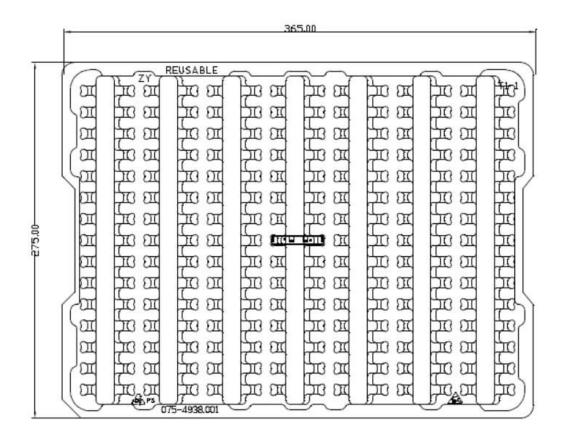



105pcs/tray

1 tray =105 pcs Antennas

1 carton = 40 trays = 4200 pcs Antennas

(\*) All RF parameters measured on Pulse reference test PCB

Issue: 1611

ROHS