


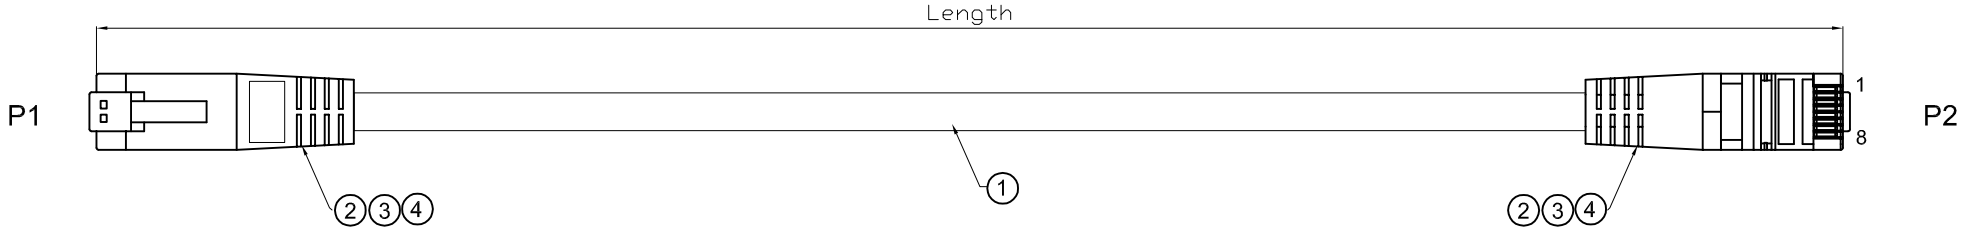


PIN OUT

| P1 | COLOR | P2 |
|---|---|---|
| 1 | white/orange | 1 |
| 2 | orange | 2 |
| 3 | white/green | 3 |
| 6 | green | 6 |
| 4 | blue | 4 |
| 5 | white/blue | 5 |
| 7 | white/brown | 7 |
| 8 | brown | 8 |
| SHELL | Drain+braid | SHELL |

TEST CONDITION:
1.1OO% OPEN & SHORT TESTING
2.VOLTAGE:300V DC
3.INSULATION RESISTANCE:10M ohm
4.CONTACT RESISTANCE:3 ohm(1M~3M)
5 ohm(5M~10M)
8 ohm(15M)

| NO: | NAME | DESCRIPTION | Q'TY | UNIT |
|---|---|---|---|---|
| ④ | AL-FOIL | Conductive AL-FOIL:W=8mm L=28mm | 2 | PCS |
| ③ | OVERMOLD | 75A PVC Color: see order code | N/A | G |
| ② | CONNECT | CAT 6 RJ45 8P8C PLUG Brass 3u" gold, Shell:Nickel plated | 2 | PCS |
| ① | CABLE | LAN CAT5e FTP 24AWG*4P+Mylar+AL+Drain, OD:5.5±0.3mm JACKET COLOR:see order code | 1 | PCS |

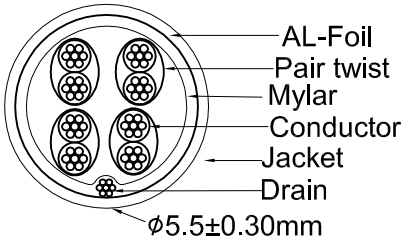WSW order code
AMJG0808-xxxx-xxB-24

| Cable length | Cable&Molding color |
|---|---|
| 0030: 0.3±0.015M | BK: Black |
| 0050: 0.5±0.02M | RD: Red |
| 0100: 1.0±0.03M | YE: Yellow |
| 0150: 1.5±0.03M | GN: Green |
| 0200: 2.0±0.05M | GY: Grey |
| 0300: 3.0±0.08M | BU: Blue |
| 0500: 5.0±0.15M | WH: White |
| 0700: 7.0±0.25M | BN: Brown |
| 1000: 10±0.30M | |
| 1500: 15±0.50M | |

RoHS compliant
Unit: mm

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Scale | Free | | | | | Date | Name | Customer-No. |
| TOLERANCE | | | | | Drawn | 30.03.2017 | Amy | |
| | | | | | Approved | 30.03.2017 | Amy | ASSMANN WSW-No. AMJG0808-xxxx-xxB-24 |
| DIM | TOL | | | | | | | Drawing-No. ASS 7952 CA rev00 |
| | | ⓪ | Drawn | 30.03.2017 | Amy | | | |
| Angle | TOL | Id. | Modification | Date | Name | | | Replace / Sheet |

ASSMANN WSW components