


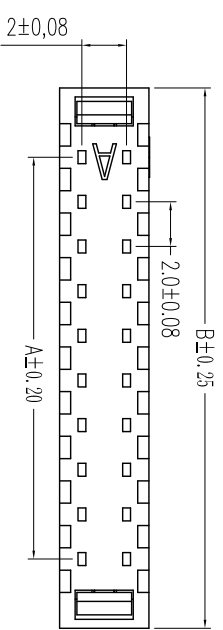
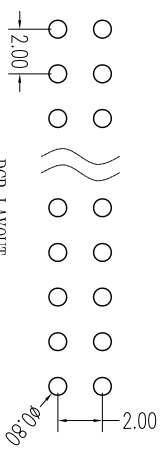

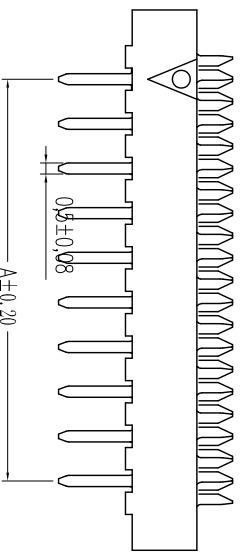



REV.	DESCRIPTION	DATE
A	RELEASE	2012.11.12

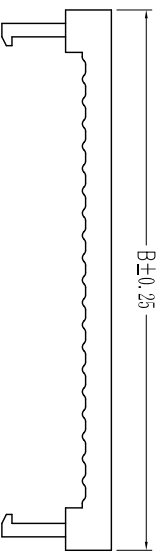

NOTES:
 Insulator Material: PBT, UL 94V-0
 Contact Plating: Gold flash over nickel
 Contact Material: Brass

Current Rating : 1A AC,DC
 Contact Resistance: 20MΩ Max.
 Dielectric Withstanding: AC 500V
 Insulator Resistance: 1000MΩ Min.
 Operating Temp.: -40°C~+105°C

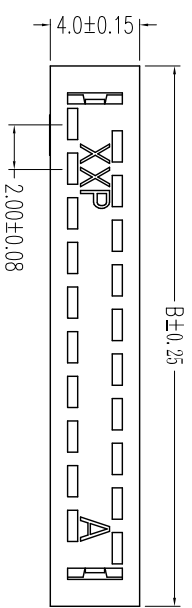

NUMBER OF POSITIONS	DIMENSION	
	A	B
06	4.0	10.2
08	6.0	12.2
10	8.0	14.2
12	10.0	16.2
14	12.0	18.2
16	14.0	20.2
18	16.0	22.2
20	18.0	24.2
24	22.0	28.2
26	24.0	30.2
28	26.0	32.2
30	28.0	34.2
34	32.0	38.2
40	38.0	44.2
44	42.0	48.2
50	48.0	54.2

Cnc Tech,LLC

Port NO.: 3140-XX-00

UNLESS TOLERANCE	DRAW BY	SCALE	SHEET	UNIT	DRW NO.:	REV: A
GENERAL	DESIGN BY	1:1	1/1	MM		
X. ± 0.30	X.* ± 3.0°					
.X ± 0.20	.X* ± 2.0°					
.XX ± 0.15	.XX* ± 1.0°					
.XXX ± 0.08	.XXX ± 0.5°					
CHECK BY	APPROVE BY					