


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

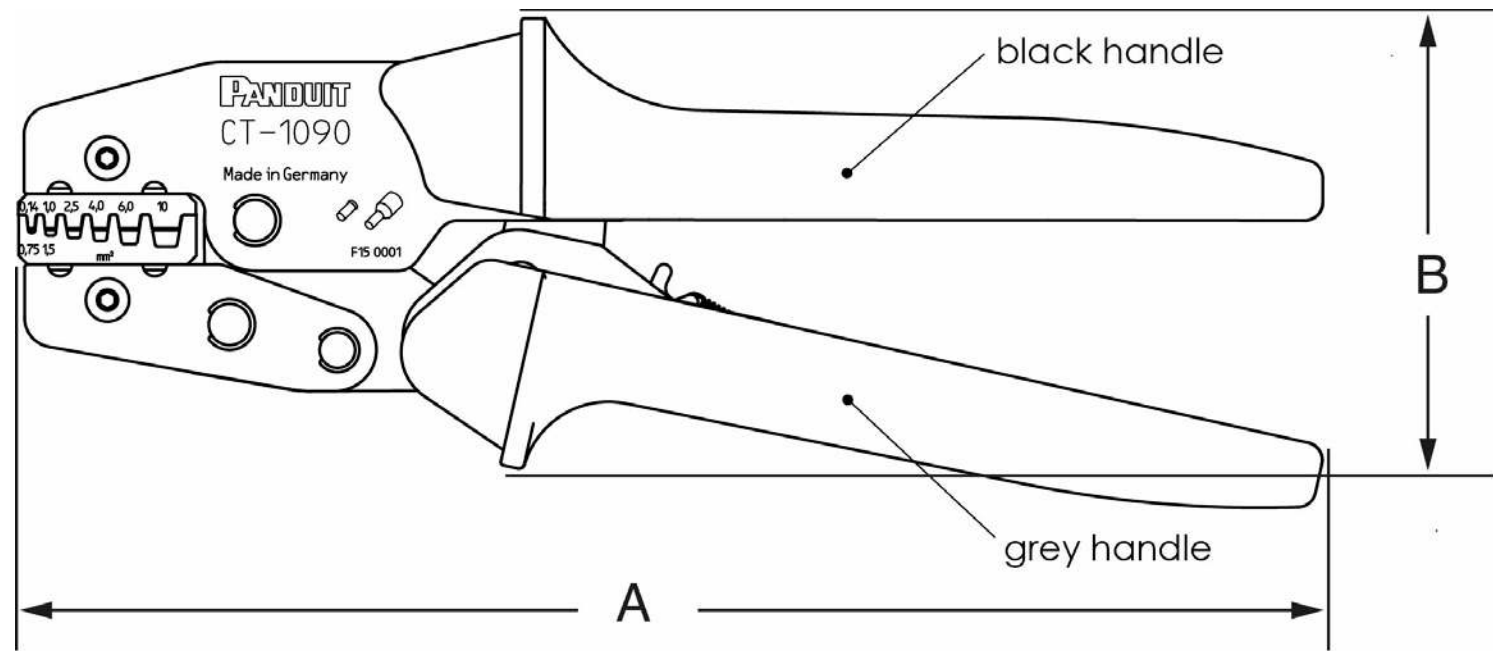

PROFILE	mm <sup>2</sup>
1	0,14-0,75
2	1,0-1,5
3	2,5
4	4,0
5	6,0
6	10,0

NOTES, UNLESS OTHERWISE SPECIFIED:

**SPECIFICATIONS:**

PANDUIT TOOL NO: CT-1090 Controlled Cycle Ferrule Crimp Tool  
 Square profile for #26 - 10 AWG (0.14-6.0mm<sup>2</sup>) insulated and non-insulated single wire ferrules and #22 - 12 AWG (0.05 - 4.0mm<sup>2</sup>) insulated twin ferrules.

For wire end ferrules with or without plastic shroud 0,14-10 mm<sup>2</sup> acc. to DIN 46228

TOOL WEIGHT: (WITHOUT FERRULES) 17.9 oz (0,51kg)

**THIS TOOL'S FEATURES INCLUDE:**

- Easy handling, integrated, releasable ratchet guarantees complete crimping
- Ergonomically developed soft-grips with slip-off protection

Fully recyclable  
 RoHS Directive 2011/65/EU compliant

DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.  
 DIMENSIONS IN PARENTHESES ARE (MM) METRIC.

A = 8.66 (220) OVERALL LENGTH  
 B = 3.14 (80) OVERALL HEIGHT  
 C = 0.78 (20) OVERALL DEPTH

File Location: Teamcenter

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY: BLR				DATE: 9-07-16	CHK: BJPU	SCALE: NONE	SHT 1 OF 1	SIZE: B
00	9-07-16	BLR	BJPU	JADE	RELEASED	10219									
							<b>CT-1090 TOOL</b>								
							CUSTOMER DRAWING								
							ITEM REVISION NAME: TF28191B01_00				<b>PANDUIT</b>				
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.x) ± --- (.xxx) ± --- (.xx) ± --- ANGLES ± ---				MATERIAL: -----				
							THIRD ANGLE PROJECTION				DRAWING NUMBER: TF28191B01				