


# CK2,5-ED-0,5ST CUNI

Order No.: 1585744



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1585744>

Turned 2.5 crimp contact, individual CuNi male contact, core cross-section 0.5 mm<sup>2</sup>, uncoated

Commercial data	
GTIN (EAN)	
sales group	D043
Pack	25 pcs.
Customs tariff	85389099
Catalog page information	Page 530 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
08/14/2007



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

Electrical characteristics	
Note	For HC-M-06, HC-M-HV, HC-M-08, HC-A, HC-BB, HC-B and HC-HV contact inserts, the quality of a crimp connection is determined by the DIN EN 60 352-2
Ambient temperature (operation)	-40 °C ... 125 °C

**Mechanical characteristics**

Conductor cross-section	0.5 mm <sup>2</sup>
Connection cross-section AWG	20
Stripping length of the individual wire	7.5 mm (9.5 mm at HC-M-HV...)
Insertion/withdrawal cycles	≥ 500

**General characteristics**

Type	Individual male contact
Series	HC-M-06; HC-M-HV; HC-M-08; HC-A; HC-BB; HC-B; HC-HV

**Material data**

Contact material	Copper-nickel (constants)
------------------	---------------------------

**Accessories**

Item	Designation	Description
------	-------------	-------------

**General**


1884869	VC-EW 1,6	Contact removal tool, for turned and rolled CK- 1.6-... contacts
---------	-----------	--

**Tools**

1676734	CK1,6/2,5-MWZ	Assembly tool, for CK 1.6... crimp contacts for small conductor cross sections
1687419	CRIMPFOX-1,6/2,5-ED-4,0	Crimping pliers, for turned contacts, CK 1.6 ED... and CK 2.5 ED...

**Diagrams/Drawings**

Dimensioned drawing

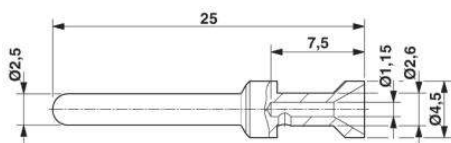

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;