

#### STRADA-2X2-T2

IESNA Type II (medium) beam applicable for European P-class standard pedestrian lighting and M-class roads

#### **SPECIFICATION:**

Dimensions 50.0 x 50.0 mm

Height 7.7 mm

Fastening glue, pin, screw

ROHS compliant yes 1



#### **MATERIALS:**

ComponentTypeMaterialColourFinishSTRADA-2X2-T2Multi-lensPMMAclear

#### **ORDERING INFORMATION:**

Component


C13300\_STRADA-2X2-T2

» Box size: 480 x 280 x 300 mm

Qty in box	MOQ	MPQ	Box weight (kg)
800	160	160	8.3




# **PRODUCT** C13300\_STRADA-2X2-T2

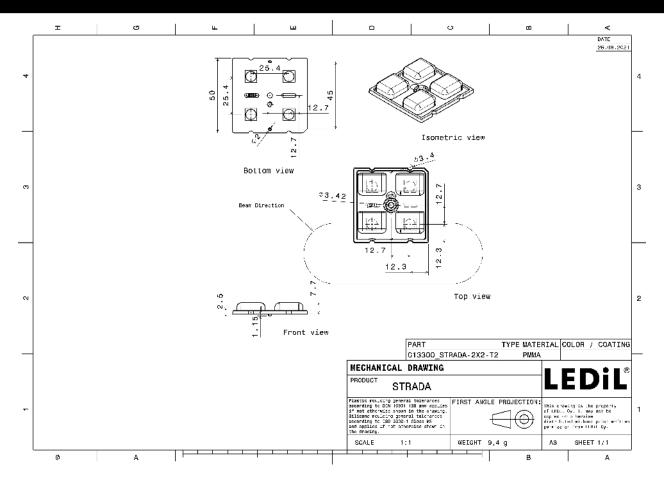

See also our general installation guide: <a href="www.ledil.com/installation\_guide">www.ledil.com/installation\_guide</a>



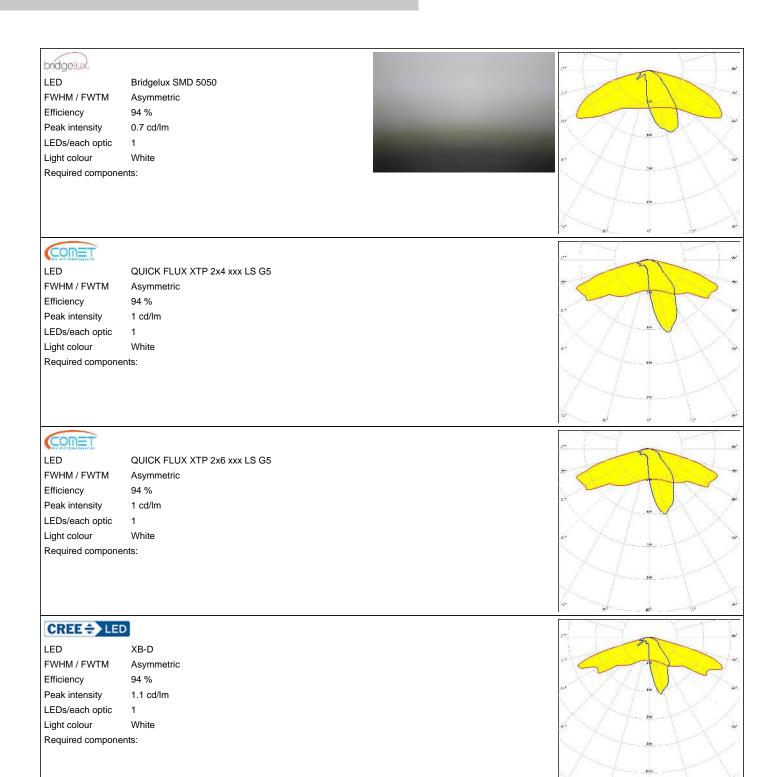




#### CREE \$\text{LED}

LED XD16
FWHM / FWTM Asymmetric
Efficiency 94 %

Peak intensity 1.3 cd/lm LEDs/each optic 1

Light colour White Required components:




#### CREE - LED

LED XD16 FWHM / FWTM Asymmetric

Efficiency 94 %
Peak intensity 0.7 cd/lm

LEDs/each optic 4
Light colour White
Required components:




#### CREE - LED

LED XM-L

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm

LEDs/each optic 1
Light colour White
Required components:




#### CREE - LED


LED XM-L2

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1

Light colour White Required components:





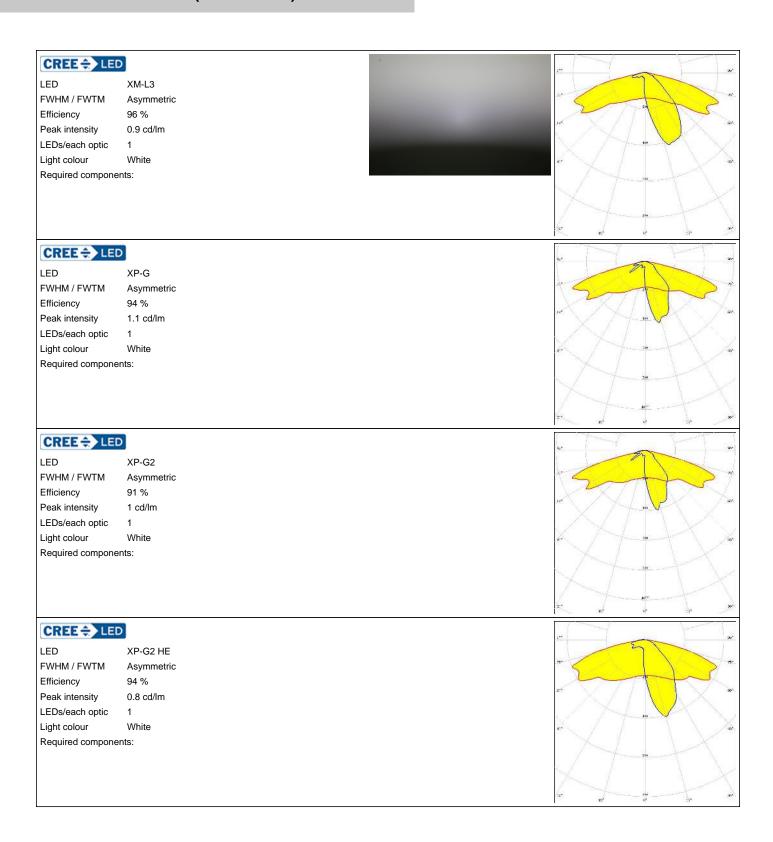




#### CREE \$\text{LED}

LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 1 cd/lm


LEDs/each optic 1
Light colour White
Required components:



#### CREE - LED

LED XP-L HD
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm


LEDs/each optic 1
Light colour White
Required components:



#### CREE - LED

LED XP-L HI
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.1 cd/lm

LEDs/each optic 1
Light colour White
Required components:




#### CREE - LED


Required components:

LED XP-L2

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White







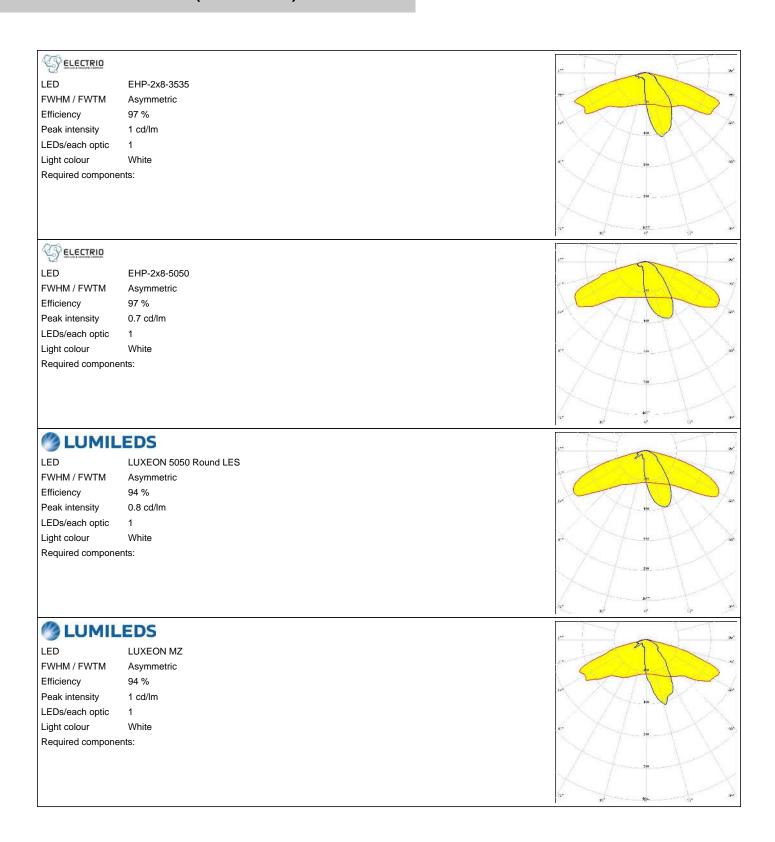













LED LUXEON Rebel ES
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:




## **UMILEDS**


LED LUXEON T
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:






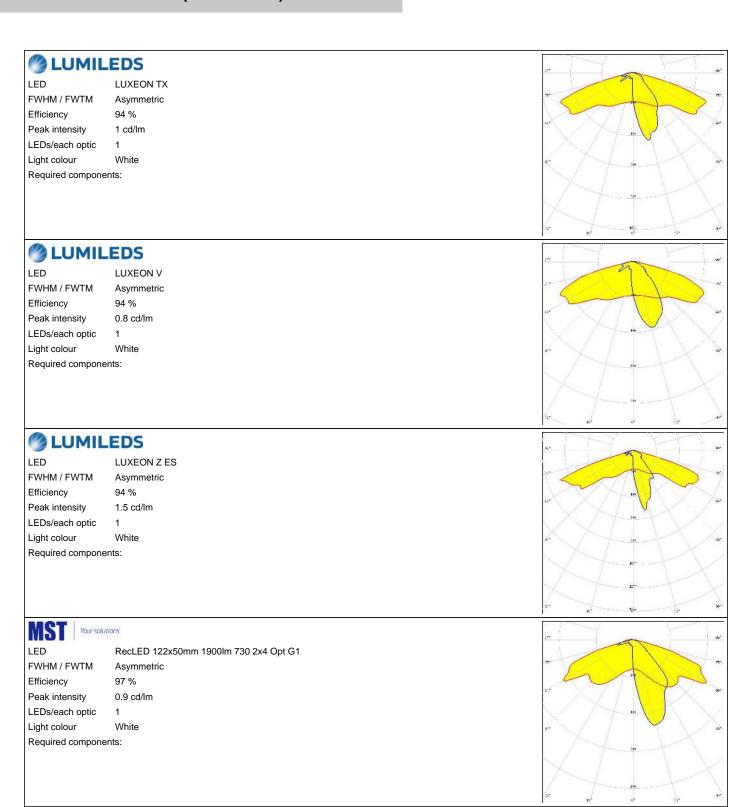



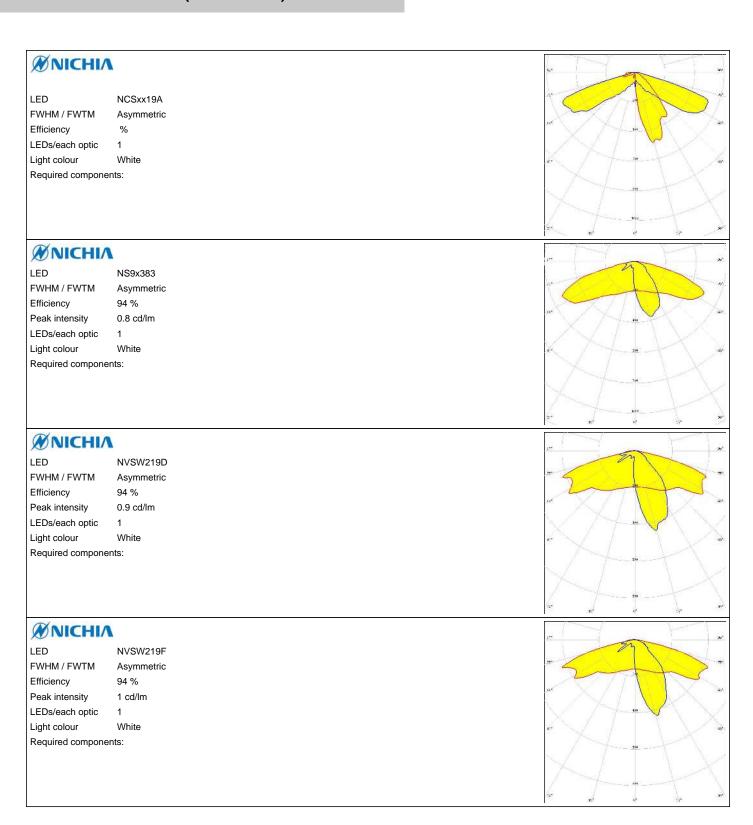



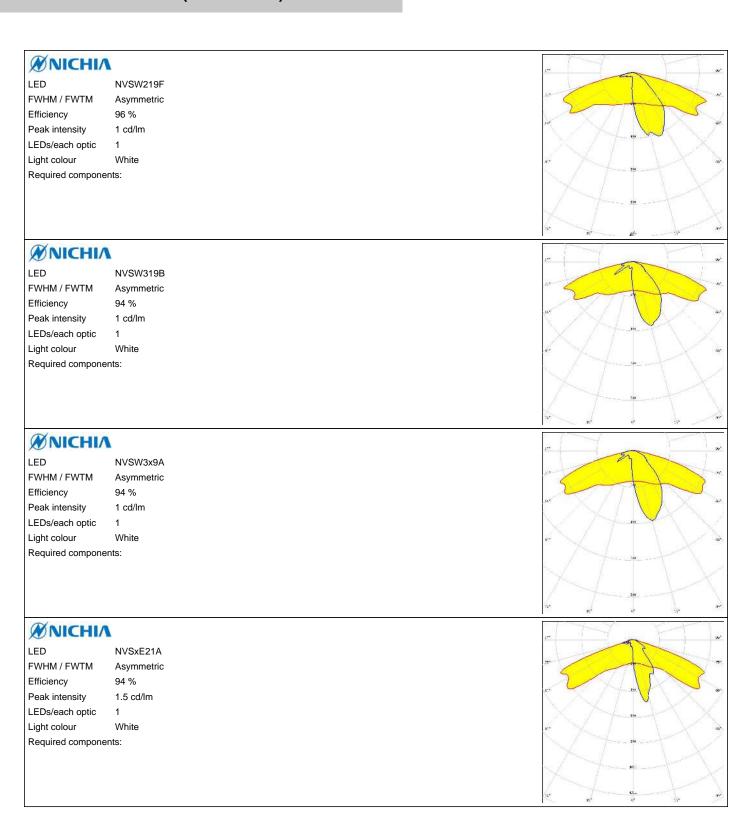






LED NVSxx19A FWHM / FWTM Asymmetric

Efficiency %
LEDs/each optic 1
Light colour White
Required components:



#### WNICHIA

LED NVSxx19B/NVSxx19C

FWHM / FWTM Asymmetric


Efficiency 96 %

Peak intensity 1.1 cd/lm

LEDs/each optic 1

Light colour White


Required components:



#### **WNICHIA**

LED NWSx229A
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm


LEDs/each optic 1
Light colour White
Required components:




## OSRAM

LED PL-BRICK HP 3800 2x8 SSG

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:





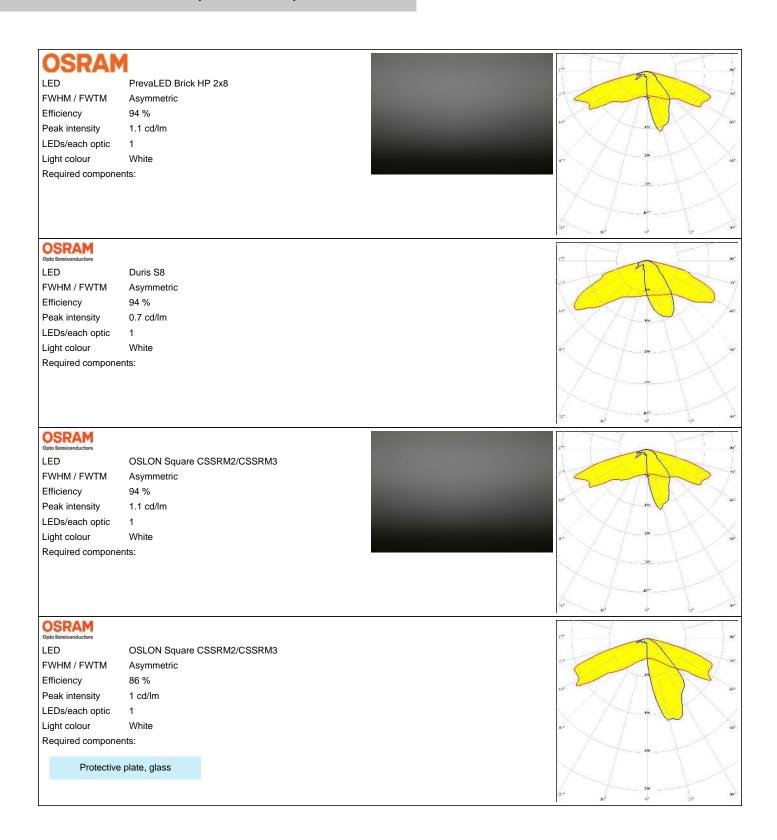




#### OSRAM Opto Semiconductors

LED OSLON Square PC


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:



#### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:



#### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White




## PHILIPS

Required components:

LED Fortimo FastFlex LED 2x8 DA G5

FWHM / FWTM Asymmetric
Efficiency 97 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:






## **PHILIPS**

Required components:

LED Fortimo FastFlex LED 2x8 DAX G4

FWHM / FWTM Asymmetric
Efficiency 0 %
LEDs/each optic 1
Light colour White



## SAMSUNG

LED HILOM RC12 Z (LH181B)

FWHM / FWTM Asymmetric


Efficiency 98 %

Peak intensity 1.2 cd/lm

LEDs/each optic 1

Light colour White


Required components:



## SAMSUNG

LED HILOM RH12 Z (LH351C)


FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:



## SAMSUNG

LED HILOM RH16 (LH351C)

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:






## SAMSUNG

LED HILOM RM12 Z (LH502C)

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:



## SAMSUNG

LED HILOM RM16 Z (LH502C)

FWHM / FWTM Asymmetric


Efficiency 99 %

Peak intensity 0.7 cd/lm

LEDs/each optic 1

Light colour White


Required components:



## SAMSUNG

LED HILOM RM8 Z (LH502C)


FWHM / FWTM Asymmetric
Efficiency 97 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



## SAMSUNG

FWHM / FWTM Asymmetric

Efficiency 94 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:





## SAMSUNG


FWHM / FWTM

Asymmetric Efficiency 94 %

Peak intensity 1 cd/lm

LEDs/each optic Light colour White

Required components:



LED LH351D


FWHM / FWTM Asymmetric

Efficiency 94 % Peak intensity 0.8 cd/lm

LEDs/each optic 1

White Light colour

Required components:



## SAMSUNG

LH351Z LED

FWHM / FWTM Asymmetric

Efficiency 94 %

Peak intensity 1 cd/lm

LEDs/each optic

Light colour White Required components:

## SAMSUNG


FWHM / FWTM Asymmetric

94 % Efficiency


Peak intensity 0.8 cd/lm LEDs/each optic

White Light colour


Required components:





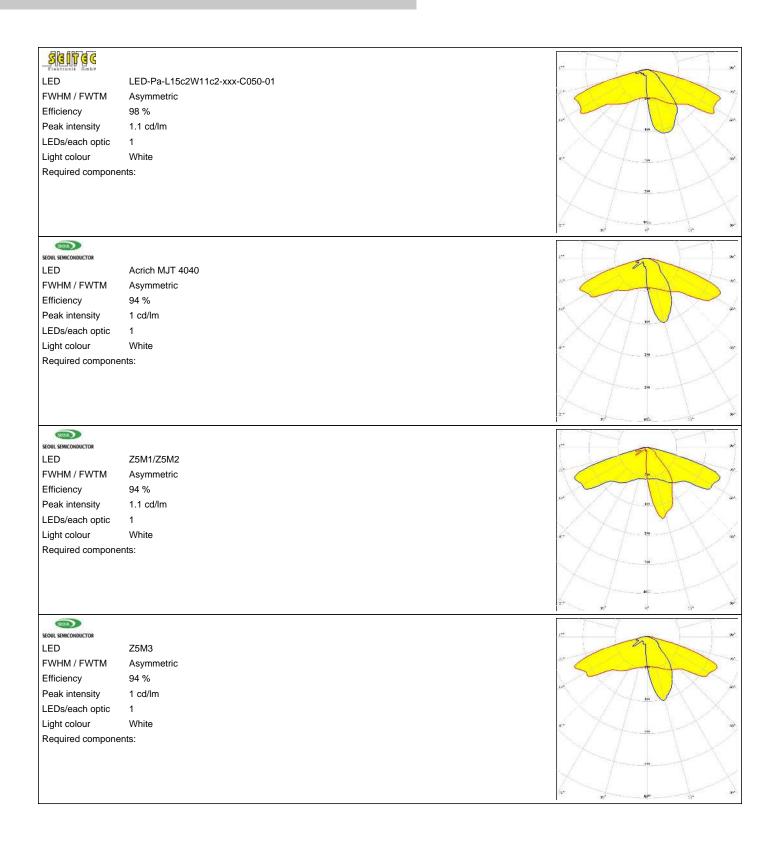



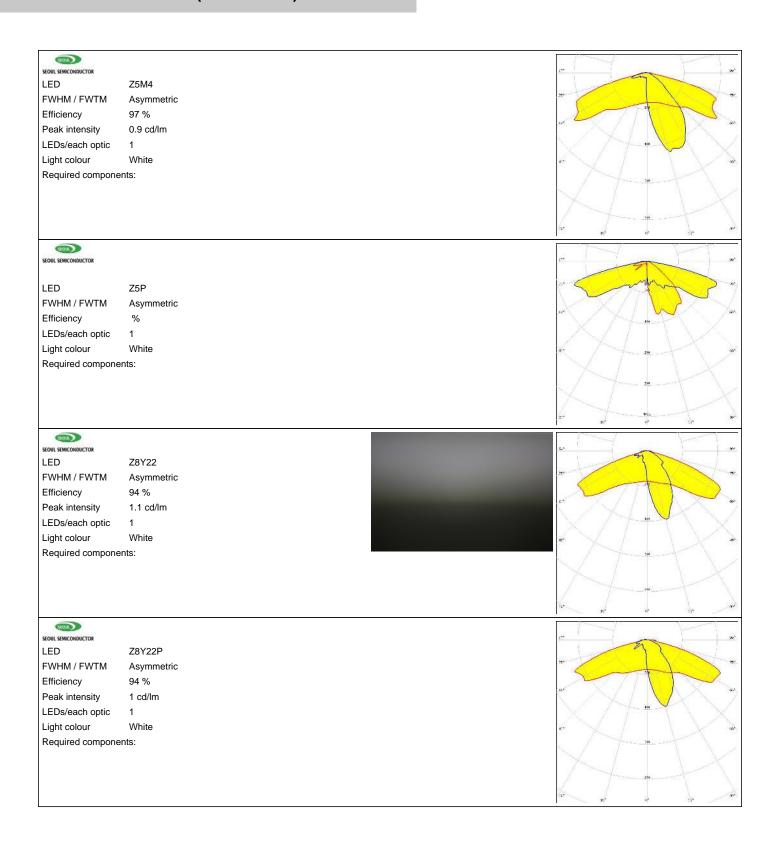




#### **TOSHIBA**

Leading Innovation


LED TL1L3
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:



#### **TOSHIBA**

Leading Innovation 3

LED TL1L4
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:



#### TRIDONIC


LED RLE 2x4 2000lm HP EXC2 OTD

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:



LED RLE 2x8 4000lm HP EXC2 OTD

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:






## **TRIDONIC**

LED RLE G1 49x223mm 4000lm xxx EXC OTD


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:



## TRIDONIC

LED RLE G1 49x245mm 4000lm xxx EXC OTD

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:






#### CREE \$ LED

LED J Series 5050 Round LES

FWHM / FWTM Asymmetric Efficiency 82 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White

Required components:

Protective plate, glass




#### CREE + LED

LED J Series 5050 Round LES

FWHM / FWTM Asymmetric Efficiency 81 % Peak intensity 0.6 cd/lm LEDs/each optic 1 White Light colour

Required components:

Protective plate, glass




#### CREE + LED

LED J Series 5050 Round LES

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 95 % Peak intensity 0.8 cd/lm LEDs/each optic Light colour White


Required components:




#### CREE & LED

J Series 5050 Round LES

FWHM / FWTM Asymmetric 95 % Efficiency Peak intensity 0.7 cd/lm LEDs/each optic White Light colour Required components:





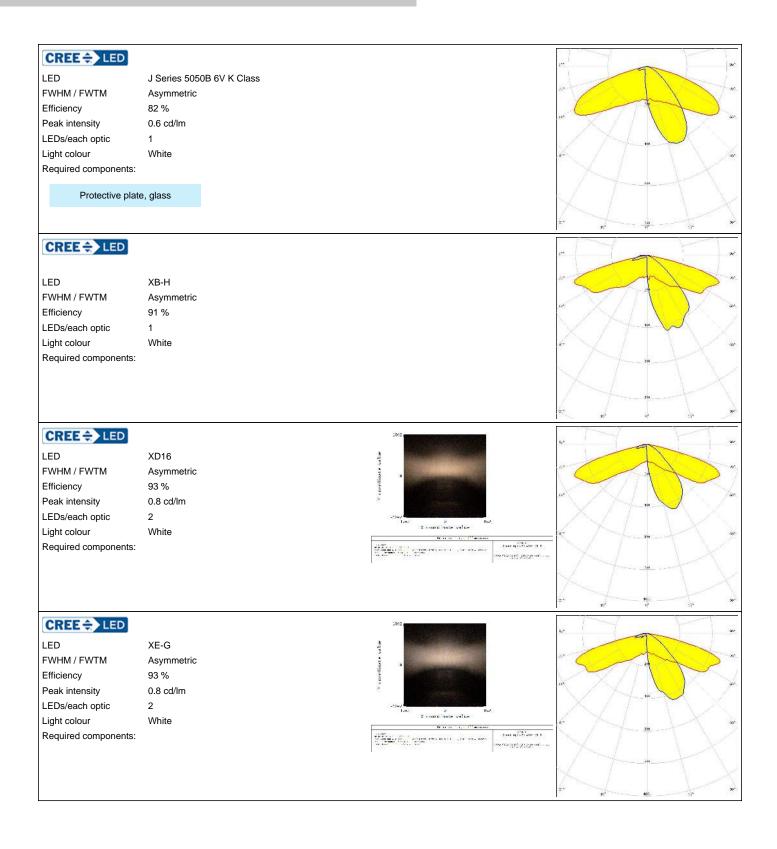





LED XHP35 HD
FWHM / FWTM Asymmetric
Efficiency 90 %
LEDs/each optic 1
Light colour White

## CREE \$ LED


Required components:

LED XHP35 HI
FWHM / FWTM Asymmetric
Efficiency 92 %
LEDs/each optic 1
Light colour White
Required components:

#### CREE \$\(\preceq\) LED

LED XP-G
FWHM / FWTM Asymmetric
Efficiency 83 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:


Protective plate, glass




#### CREE & LED

LED XP-G2
FWHM / FWTM Asymmetric
Efficiency 78 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:


Protective plate, glass






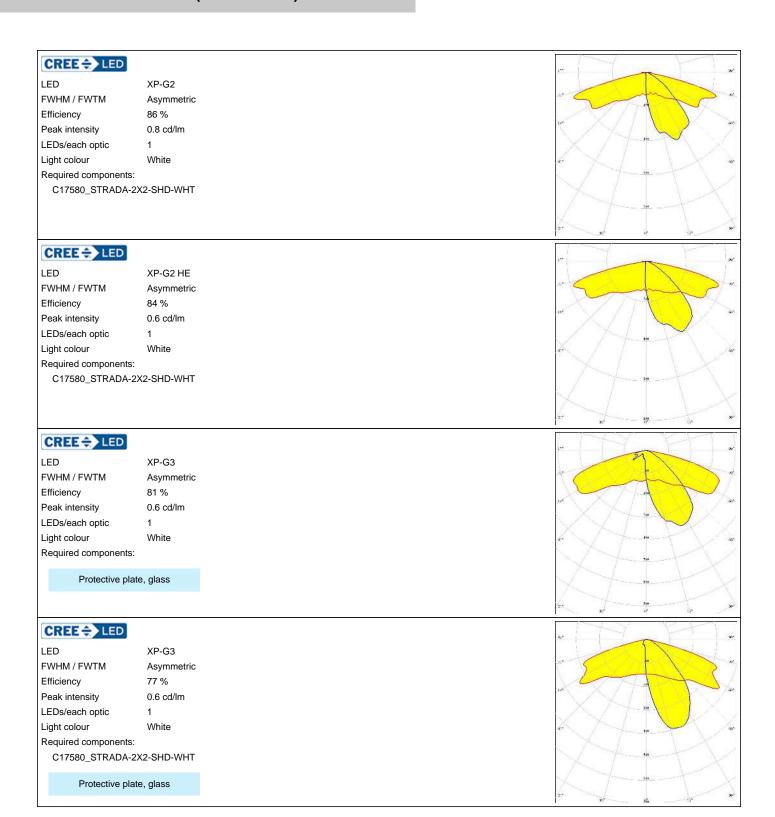



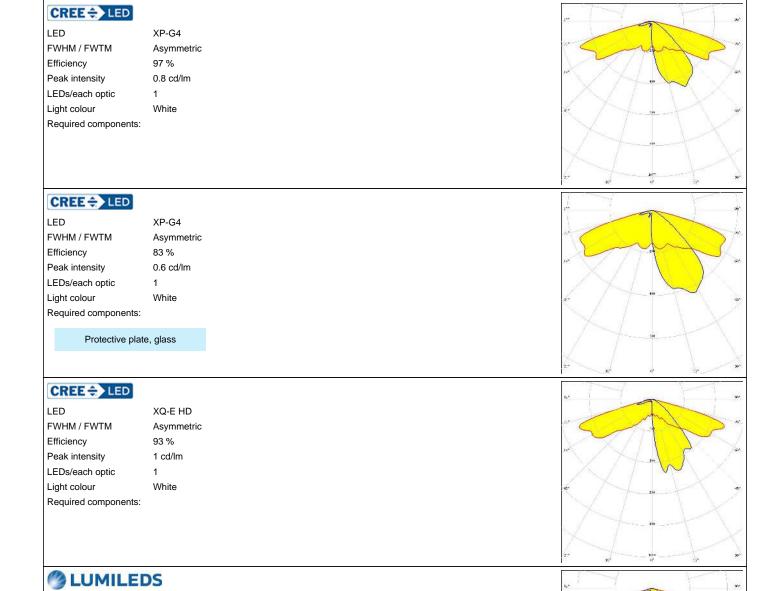



LUXEON 3030 2D (Round LES)

Asymmetric

81 %

White

0.7 cd/lm

LED

FWHM / FWTM

Peak intensity

Light colour

LEDs/each optic

Required components:

Protective plate, glass

Efficiency






LED LUXEON 3030 2D (Round LES)

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White

Required components:




#### **MUMILEDS**

LED LUXEON 3030 2D (Square LES)

FWHM / FWTM Asymmetric
Efficiency 95 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White

Required components:



#### **UMILEDS**

LED LUXEON 3030 2D (Square LES)

FWHM / FWTM Asymmetric


Efficiency 82 %

Peak intensity 0.6 cd/lm

LEDs/each optic 1

Light colour White

Protective plate, glass




## **UMILEDS**

Required components:

LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass








LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17580\_STRADA-2X2-SHD-WHT

Protective plate, glass




#### **MUMILEDS**

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17580\_STRADA-2X2-SHD-WHT




#### LUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:


Protective plate, glass



#### **DUMILEDS**

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:








LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 70 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17677\_STRADA-2X2-SHD-BLK

Protective plate, glass




#### **DUMILEDS**

LED LUXEON H50-2 FWHM / FWTM Asymmetric

Efficiency %
LEDs/each optic 1
Light colour White


Required components:



#### **MILEDS**

LED LUXEON HL2X
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.7 cd/lm

LEDs/each optic 1
Light colour White
Required components:




## **MILEDS**


LED LUXEON HL2X
FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White


Protective plate, glass

Required components:









#### **MILEDS**

LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)

FWHM / FWTM Asymmetric
Efficiency 82 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:


## Protective plate, glass

## LUMILEDS

LED LUXEON XR-HL2X (L2H2-xxxxxxMLU010)

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:




#### **WNICHIA**


Required components:

LED NFSx757G
FWHM / FWTM Asymmetric
Efficiency 82 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White

Protective plate, glass





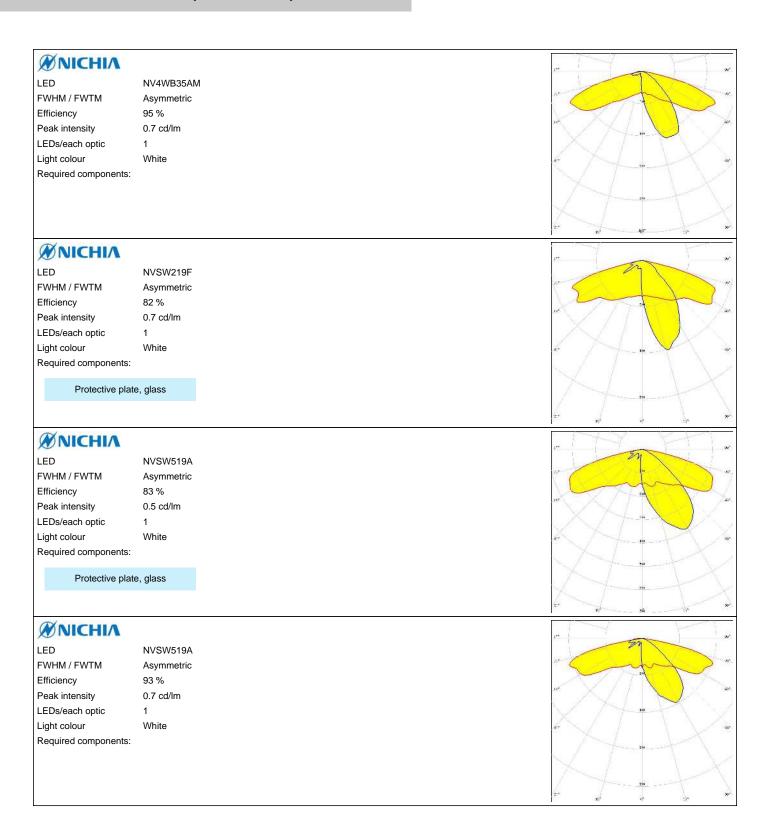






LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White

Required components:


Protective plate, glass



#### WNICHIA

LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 83 %
Peak intensity 0.5 cd/lm
LEDs/each optic 4
Light colour White
Required components:

Protective plate, glass



#### WNICHIA


LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:

WNICHIA

LED NVSxx19B/NVSxx19C

FWHM / FWTM Asymmetric
Efficiency 81 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass








LED NVSxx19B/NVSxx19C

FWHM / FWTM Asymmetric Efficiency 82 % Peak intensity 0.7 cd/lm LEDs/each optic Light colour White

Protective plate, glass

Required components:




LED PrevaLED Brick HP 2x8

FWHM / FWTM Asymmetric Efficiency 81 % Peak intensity 0.6 cd/lm LEDs/each optic 1 White Light colour

Protective plate, glass

Required components:




## OSRAM Opto Semiconductors

LED Duris S8 FWHM / FWTM Asymmetric Efficiency 80 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White

Required components:

C17677\_STRADA-2X2-SHD-BLK




## OSRAM Opto Semiconductors

LED Duris S8 FWHM / FWTM Asymmetric Efficiency 80 % Peak intensity 0.5 cd/lm

LEDs/each optic White Light colour Required components:

Protective plate, glass





## OSRAM Opto Semiconductors

LED

Duris S8

FWHM / FWTM

Asymmetric

Efficiency

84 %

Peak intensity

0.6 cd/lm


LEDs/each optic

White

Light colour

Required components:

C17580\_STRADA-2X2-SHD-WHT



## OSRAM Opto Semiconductors

LED OSCONIQ P 3737 (2W version)

FWHM / FWTM

Asymmetric

Efficiency

92 %

Peak intensity

0.9 cd/lm


LEDs/each optic

1

Light colour

White

Required components:



## OSRAM Opto Semiconductors

LED OSCONIQ P 3737 (3W version)

FWHM / FWTM

Asymmetric

Efficiency

94 %

Peak intensity


0.7 cd/lm

LEDs/each optic

Light colour

White

Required components:



## OSRAM Opto Semiconductors

LED

OSLON Square CSSRM2/CSSRM3

FWHM / FWTM

Asymmetric

Efficiency Peak intensity 84 %

LEDs/each optic


0.7 cd/lm

White

Light colour

Required components:

C17580\_STRADA-2X2-SHD-WHT






#### OSRAM Opto Semiconductors

LED OSLON Square PC

FWHM / FWTM Asymmetric
Efficiency 87 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White

Protective plate, glass




#### **DHILIDS**

Required components:

LED Fortimo FastFlex LED 2x2 DA G5

FWHM / FWTM Asymmetric
Efficiency 84 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17580\_STRADA-2X2-SHD-WHT



#### PHILIPS

LED Fortimo FastFlex LED 2x2 DA G5

FWHM / FWTM Asymmetric

Efficiency 73 %

Peak intensity 0.6 cd/lm


LEDs/each optic 1

Light colour White

Required components:

C17580\_STRADA-2X2-SHD-WHT

Protective plate, glass




## PHILIPS

LED Fortimo FastFlex LED 2x8 DA G5

FWHM / FWTM Asymmetric
Efficiency 83 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass






#### PHILIPS

LED Fortimo FastFlex LED 2x8 DA HE

FWHM / FWTM Asymmetric
Efficiency 97 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:



#### **DHILIDS**

LED Fortimo FastFlex LED 2x8 DA HE

FWHM / FWTM Asymmetric

Efficiency 84 %


Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:

Protective plate, glass



#### PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4

FWHM / FWTM Asymmetric

Efficiency 80 %


Peak intensity 0.6 cd/lm

LEDs/each optic 1

Light colour White

Required components:

Protective plate, glass




## SAMSUNG

LED HILOM RM8 Z (LH502C)

FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass






## SAMSUNG

LED LH351B
FWHM / FWTM Asymmetric
Efficiency 81 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Protective plate, glass




#### SAMSUNG

LED LH351C
FWHM / FWTM Asymmetric
Efficiency 73 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C17677\_STRADA-2X2-SHD-BLK

Protective plate, glass




#### SAMSUNG

LED LH351C
FWHM / FWTM Asymmetric
Efficiency 77 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17580\_STRADA-2X2-SHD-WHT

Protective plate, glass




## SAMSUNG


Required components:

LED LH351C
FWHM / FWTM Asymmetric
Efficiency 78 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White


Protective plate, glass





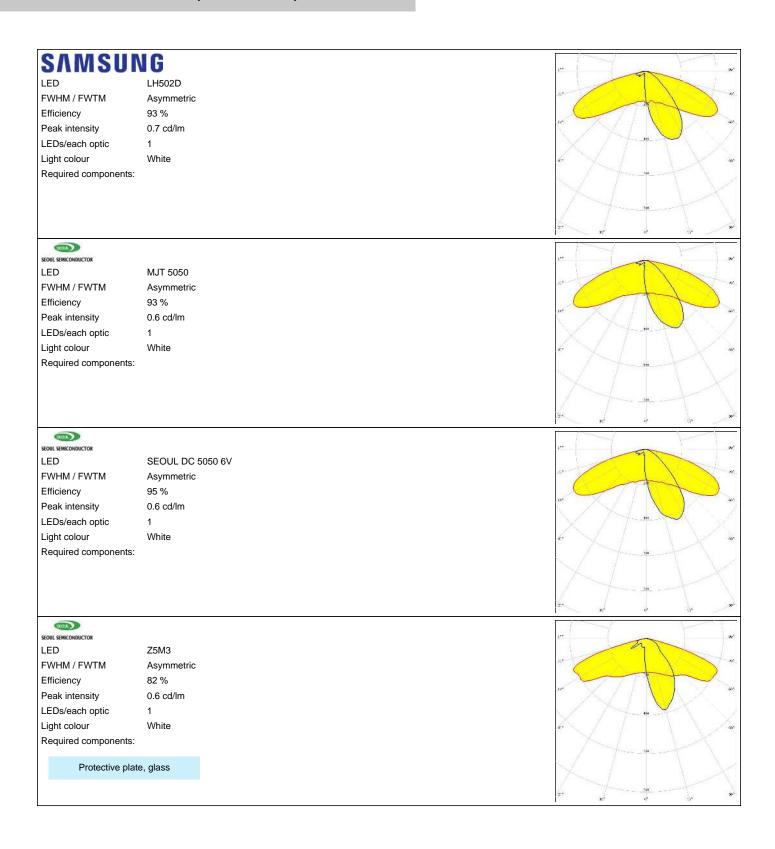



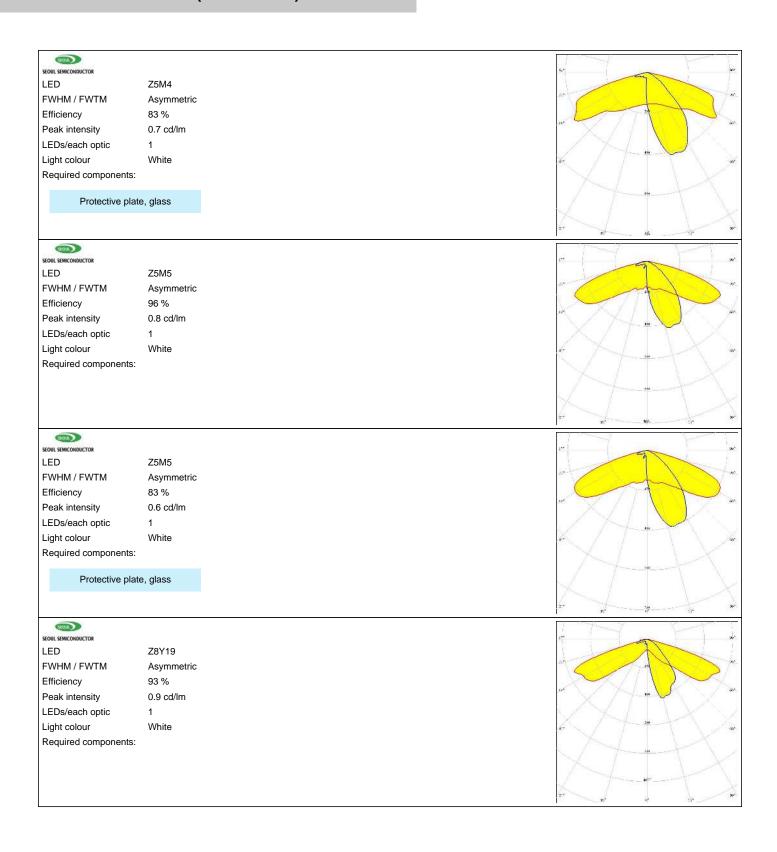






LED Z8Y19
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White

Required components:




## **TRIDONIC**

LED RLE 2x8 4000lm HP EXC2 OTD

FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Protective plate, glass




#### TRIDONIC

LED RLE G1 49x121mm 2000lm xxx EXC OTD

FWHM / FWTM Asymmetric
Efficiency 82 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass





# PRODUCT DATASHEET C13300\_STRADA-2X2-T2

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

## Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

## Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

41/41

www.ledil.com/ where\_to\_buy