

6

5

4

3






2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/20/16	

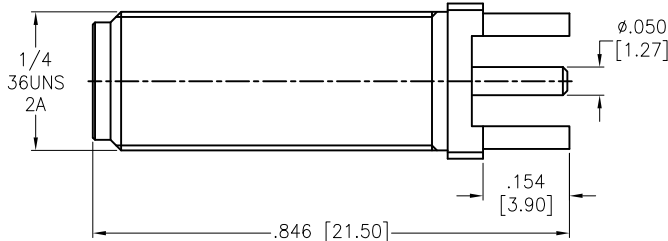

RECOMMENDED PCB LAYOUT

HEX NUT	BRASS	GOLD
WASHER	STEEL	GOLD
CONTACT PIN	BRASS	GOLD
INSULATOR	PTFE	WHITE
BARREL	BRASS	GOLD
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:

Electrical:
 Nominal Impedance: 50 ohms
 Frequency range: DC 0-18 GHz
 Working voltage: 335 Volts max
 Proof voltage: 1000 Volts
 Temperature Rating:
 Operating temperature: -65°C to +165°C

Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			
APPROVALS		TITLE	
DRAWN	HR	SMA JACK EDGE CARD MOUNT PCB, STRAIGHT	
CHECKED	MW	SIZE	PART NO.
APPROVED		X	RF2-152-T-00-50-G-HDW
DATE		REF:	SCALE: NTS
4/20/16		S00277T	SHEET 1 OF 1

6

5

4

3

2

1