
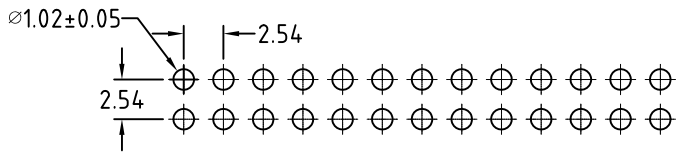
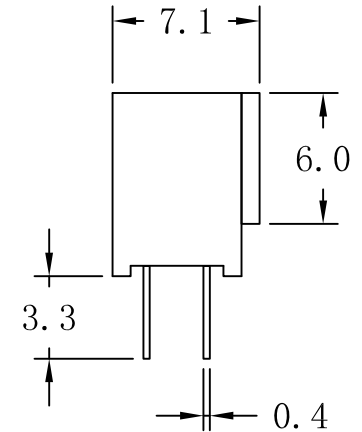
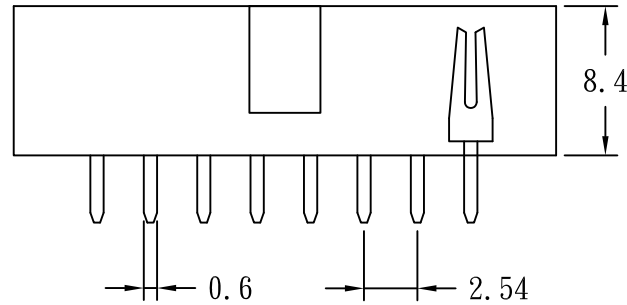


SIGN	DATE	DESCRIPTION	APPROVER
△			Marvin
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!</i>			

SPECIFICATIONS

Material
 Insulator:PBT glass reinforced, rated UL94V-0
 Contact:Phosphor Bronze or Brass
 Electrical
 Current Rating: 1 Amp
 Contact Resistance:<30mΩ
 Insulation Resistance:>3000MΩ
 Dielectric Withstanding Voltage:500V AC for 1 minute
 Operating Temperature:-40°C to +105°C
 Process Temperature: 240°C ± 5°C for 5± 0.5 sec
 Insertion Depth: 2.25mm (min) ~ 6.1mm (max)
 RoHS Compliant

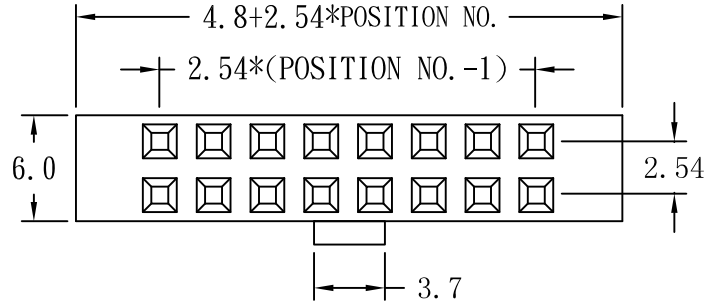

RECOMMENDED P.C.B LAYOUT

Part Number
 SH2-XXG-PT
 ↑
 # of circuits

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		SH2 Series, 2.54mm, dual row female header, vertical, w/polarization bump, gold, thick wall				
PART NO.		SH2-XXG-PT		DWG NO. SH2-XXG-PT.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	1200		
		Marvin 2011.10.14	Marvin 2011.10.14	Tolerance		
				X±0.30		
				.X±0.20		
				.XX±0.15		
				.XXX±0.10		
				UNIT: mm		
				SCALE: NONE		
				REV.: A		
				SHEET: 01/01		