




Specification for:

# ZJ44916TC

110 Delta Drive  
 Pittsburgh, PA 15238  
 Phone: 412/696-1333  
 Fax: 412/696-0333  
 Email: magnetics@spang.com

## DIMENSIONS

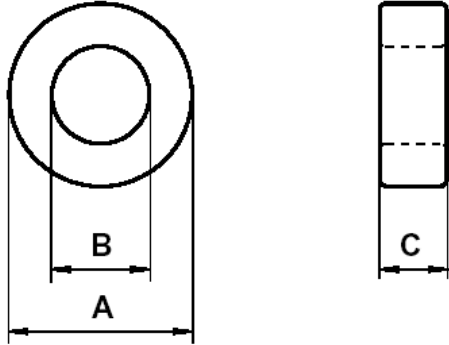

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	49.1	48.48	50.22
I.D. (B)	33.8	32.69	34.41
Ht. (C)	15.6	15.64	16.64

Eff. Parameters		
A <sub>e</sub> mm <sup>2</sup>	I <sub>e</sub> mm	V <sub>e</sub> mm <sup>3</sup>
118	127	15010

## INDUCTANCE

A <sub>L</sub> value (nH/T <sup>2</sup> )	Test conditions	
5900 ± 20%	10 kHz	0.5 mT (For N = 1, use 6 mA), 25°C
≥ 0.9 x A <sub>L</sub> @ 10 kHz	200 kHz	

## ELECTRICAL LOSSES

tan δ / μ <sub>i</sub>	Test conditions
≤ 20 · 10 <sup>-6</sup>	100 kHz, 0.5 mT, 25°C

## COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 2000 V Min Wire-to-Wire.

## NOTE

Spec. Modifications	Previous	Revised
2005.05.26	Bare Nom Ht = 15.9 Breakdown voltage > 1,000 V	Bare Nom Ht = 15.6 Breakdown voltage > 2,000 V
2005.09.26	LF: General J material A <sub>L</sub> value up to 200 kHz	LF: Detail as indicated A <sub>L</sub> at 200 kHz ≥ 0.9 x A <sub>L</sub> at 10 kHz