


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DST		REVISIONS			
P	LTR	REV	PER	DESCRIPTION	DATE	DWN	APVD
R				0A40-0124-04	23MAR04	JWD	JD

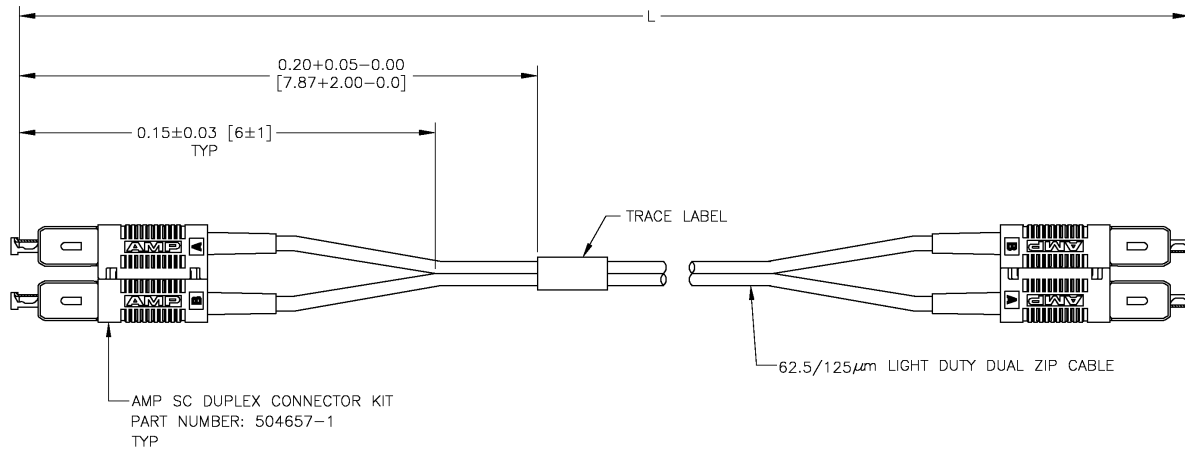

△ MAXIMUM INSERTION LOSS IS 0.5 dB PLUS CABLE ATTENUATION OF 1.5 dB/km at 1300 nm. (SEE TABLE)

MAX IL (dB)	L	PART NUMBER
0.73	150.00±1.50 [5906.0±59.0]	3-504971-3
0.57	45.00±0.45 [1772.0±18.0]	3-504971-2
0.50	2.43±0.05 [96.0±2.0]	3-504971-1
0.50	1.82±0.05 [72.0±2.0]	3-504971-0
0.50	1.21±0.05 [48.0±2.0]	2-504971-9
0.52	10.97±0.15 [431.8±6.0]	2-504971-8
0.52	10.36±0.15 [407.8±6.0]	2-504971-7
0.51	9.75±0.15 [383.8±6.0]	2-504971-6
0.51	9.14±0.15 [359.8±6.0]	2-504971-5
0.51	8.53±0.15 [335.8±6.0]	2-504971-4
0.51	7.92±0.15 [311.8±6.0]	2-504971-3
0.59	60.0±0.60 [2362±24]	2-504971-2
0.50	0.46±0.05 [18.00±2.00]	2-504971-1
0.51	6.0±0.08 [236±3]	2-504971-0
0.51	6.10±0.08 [240±3]	1-504971-9
0.50	0.61±0.03 [24±1]	1-504971-8
0.65	100±1.0 [3937±39]	1-504971-7
0.58	50±0.5 [1969±20]	1-504971-6
0.52	16±0.30 [630±12]	1-504971-5
0.52	13±0.15 [512±6]	1-504971-4
0.52	11±0.15 [433±6]	1-504971-3
0.51	4±0.08 [157±3]	1-504971-2
0.51	8±0.15 [315±6]	1-504971-1
0.51	7±0.08 [275.6±3]	1-504971-0
0.55	30±0.3 [1181±12]	504971-9
0.53	20±0.3 [787±12]	504971-8
0.52	15±0.15 [591±6]	504971-7
0.61	76±0.76 [2992±30]	504971-6
0.52	10±0.15 [394±6]	504971-5
0.51	5±0.08 [197±3]	504971-4
0.50	3±0.05 [118±2]	504971-3
0.50	2±0.05 [79±2]	504971-2
0.50	1±0.05 [39±2]	504971-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: METERS [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	DWG. S.URICH 17APR96 R.PAUL 23APR96 APVD N.MILLER 23APR96 PRODUCT SPEC APPLICATION SPEC	NAME AMP Tyco Electronics Corporation Harrisburg, PA 17057
MATERIAL - FINISH -		WEIGHT - CUSTOMER DRAWING	SIZE CASE CODE DRAWING NO. RESTRICTED TO A2 00779 ©=504971 - SCALE NTS SHEET 1 OF 1 REV R