


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00126	Connector, dc plug, 5.5x2.1xL22.5 mm, brass nickel plated	1	
2	50-00362	Connector, dc jack, 5.5x2.1xL20.5 mm, molding style	1	
3	30-00008	Wire, 2C BC, 22 AWG, UL2468, 300V, 80C, 3.6 mm, PVC, 87A	1	
4	24-00042	Overmold, PVC, black	1	
5	24-00043	Overmold, PVC, black	1	

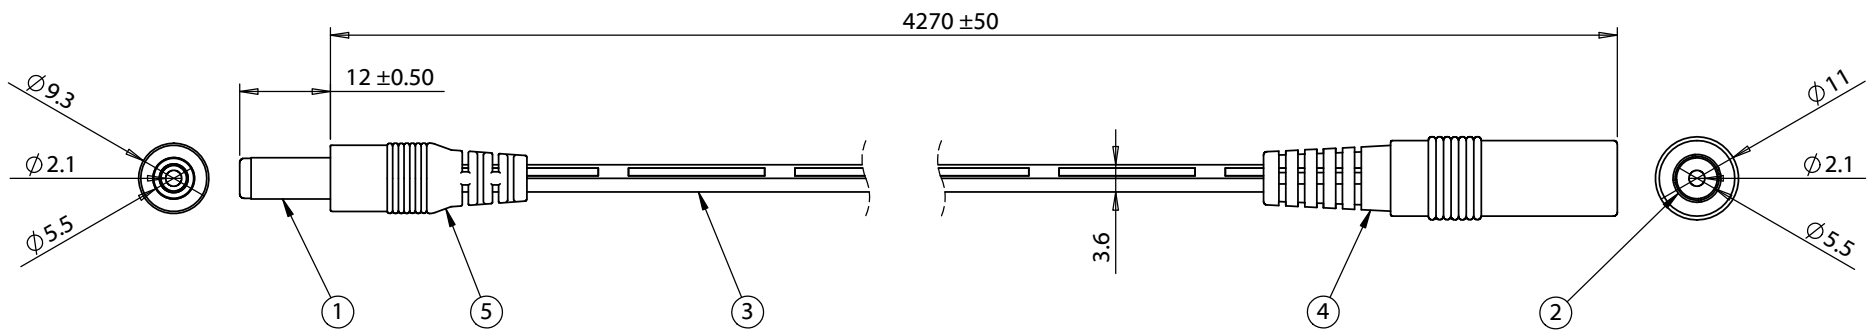

Wiring Diagram		
50-00126	wire color	50-00362
center	black with stripe	center
sleeve	black	sleeve

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	10/22/2010	Initial release	GL 2016.03.09 16:08:12 -08'00'		
A1	8/7/2014	Updated drawing and template	Verified:	Function test: no open, no short circuit, no intermittent	Size:
			AG 2016.04.04 14:35:41 -07'00'	Description:	Part number:
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 4270 mm, 5.5x2.1x12 mm dc plug to 5.5x2.1 mm dc jack, 22 AWG, UL2468 30-00008	A
					Scale: 1:5
					Sheet 1 of 1