


Data sheet | Item number: 752-9401

Edge Computer; 2 x ETHERNET, 4 x USB, HDMI, DP; 8GB RAM; 64GB FLASH


www.wago.com/752-9401

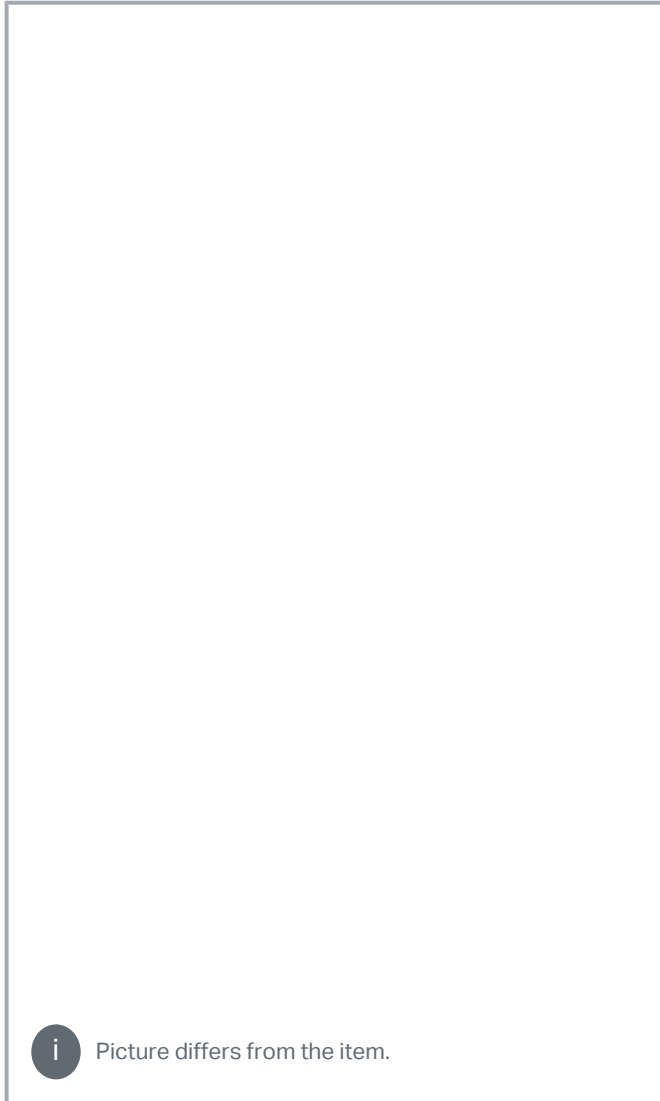

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

- 2 x ETHERNET interface for connecting to field devices and IT networks
- 4 x USB interface for optional connection of a USB stick, mouse or keyboard
- HDMI and display port interfaces for connecting a display

Data

Technical data

ETHERNET protocols

DHCP
DNS
HTTP
HTTPS

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



	SSH SCP SFTP
Visualization	Web server Webserver
Operating system	Debian Linux 10.5
Processor	Intel® Atom E3845 Quadcore 1.91 GHz
Security-Modul	TPM 2.0 chip
Main memory (RAM)	8,192 MB
Main memory (RAM)	8 GB; DDR.3L 1333 MHz
Internal memory (flash)	65.536 MB
Internal memory (flash)	64 GB; mSATA SSD
Indicators	3 x LED
Supply voltage	24 VDC (10 ... 36 V)
Input current (typ.) at nominal load (24 V)	1250 mA
Input current (max.) (24 V)	1750 mA
Operating power	30 W (typ.); 42 W (max.)

Connection data

Connection technology: communication/fieldbus	2 x RJ-45 1000BASE-T; 3 x USB 2.0 (type A); 1 x USB 3.0 (type A)
---	--

Physical data

Width	40 mm / 1.575 inches
Height	150 mm / 5.906 inches
Depth	105 mm / 4.134 inches

Mechanical Data

Weight	1309 g
Housing material	Aluminum, powder-coated

Environmental requirements

Ambient temperature (operation)	-20 ... +60 °C
Ambient temperature (storage)	-40 ... +85 °C
Protection type	IP40
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Commercial data

ETIM 8.0	EC001413
ETIM 7.0	EC001413
Recupel Type	
PU (SPU)	1 pcs
Packaging type	BOX
Country of origin	TW
GTIN	4066966108262
Customs tariff number	8471500000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	KC National Radio Research Agency	Article 58-2, Clause 3	R-R-W43-EGPC752
	UL Underwriters Laboratories Inc.	UL 62368-1	E482462

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Downloads

Documentation

Manual

Product Manual WAGO Edge Computer 2 x ETHERNET, 4 x USB, HDMI, DP; 4/8GB RAM; 64GB FLASH	V 1.3.0 2022 年11 月24 日	pdf 1.3 MB	Download
---	---------------------------	---------------	----------

System Description

Edge Computing; General Product Information	pdf 224.4 kB	Download
---	-----------------	----------

Subject to changes. Please also observe the further product documentation!



Runtime Software

Firmware

0752-94xx, Edge Computer	V 03	zip	Download
WAGO_FW0752-94xx_V020300_IX03_I	2022 年10月4日	946.4 MB	

Software Solutions (Applications)

Wago Application Analytics

Wago Application Analytics	URL	Download
----------------------------	-----	----------

Analytics Connection Direct from the PLC Program

The WAGO Analytics application makes it easy to leverage optimization potential.

This new software solution for WAGO controllers allows you to analyze, evaluate and optimize processes without having to leave the familiar PLC programming environment. You can use the WAGO Analytics application without entering the IT and Linux® environment directly; numerous function modules support data acquisition, data analysis and data evaluation. The analysis, evaluation and optimization functions run in the background on powerful WAGO Edge Devices, for which an executable installation package is available. All the data stays within the local network, so no Internet connection to additional systems is necessary.

Additional data sources can be connected conveniently via Node-RED, for example. Tools like Grafana can be used for visualization, allowing you to view data quickly and easily in dashboards. Anomalies and malfunctions can be detected automatically with ready-made algorithms.

The Benefits for You:

- An easy way to get started with process data analysis
- Support throughout all analysis project phases
- Quick and easy data visualization

CAD/CAE-Data

CAD data

2D/3D Models 752-9401	URL	Download
-----------------------	-----	----------

CAE data

ZUKEN Portal 752-9401	URL	Download
-----------------------	-----	----------

EPLAN Data Portal 752-9401	URL	Download
----------------------------	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 752-9401

URL

Download

Edge Computer; 2 x ETHERNET, 4 x USB, HDMI, DP; 8GB RAM; 64GB FLASH

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.