


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

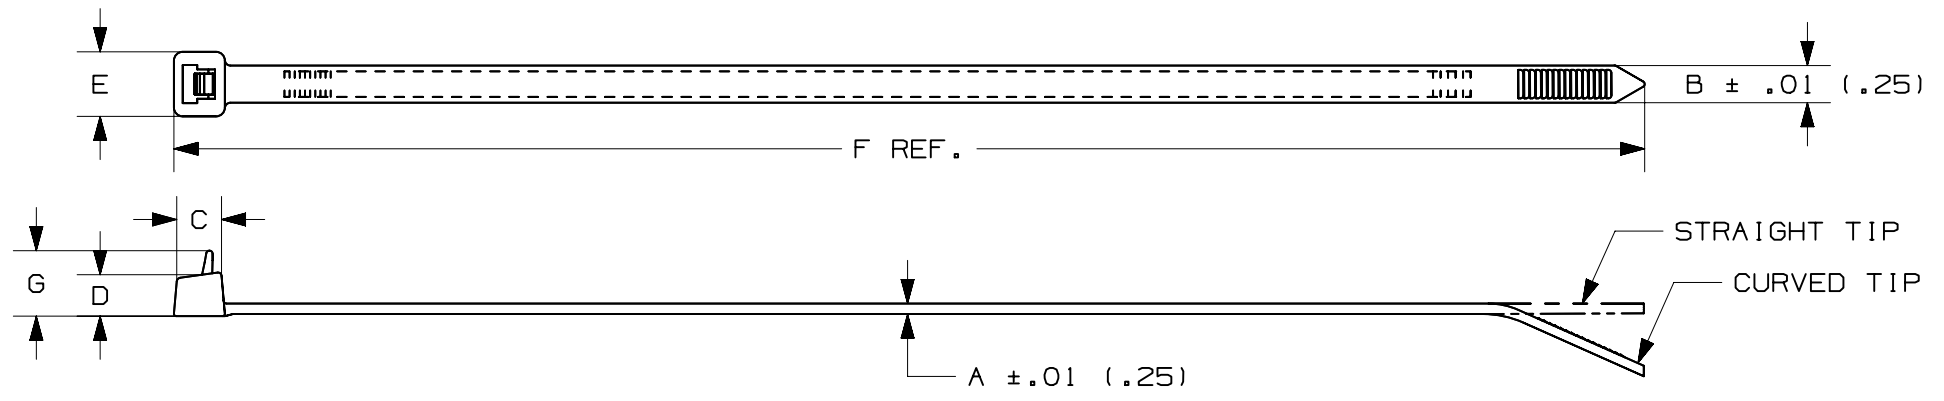

PANDUIT * PART NO.	BUNDLE DIA.		A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	G in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS- SECTION	TIP STYLE	WEIGHT lbs/100pcs (g)
	MIN in (mm)	MAX in (mm)											
PRT1S	.06 (1.5)	1.00 (25)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	4.8 (122)	.318 (8.1)	50 (222)	STANDARD	CURVED	.13 (59)
PRT1.5S	.06 (1.5)	1.50 (38)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	6.3 (160)	.318 (8.1)	50 (222)	STANDARD	CURVED	.26 (119)
PRT2S	.06 (1.5)	1.88 (48)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	7.4 (188)	.318 (8.1)	50 (222)	STANDARD	CURVED	.29 (132)
PRT3S	.06 (1.5)	3.00 (76)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.219 (5.6)	.337 (8.6)	11.5 (292)	.318 (8.1)	50 (222)	STANDARD	CURVED	.45 (205)
PRT4S	.06 (1.5)	4.00 (102)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.219 (5.6)	.337 (8.6)	14.5 (368)	.318 (8.1)	50 (222)	STANDARD	CURVED	.56 (255)

* SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR


REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	ITEM REVISION NAME	DATASET FILE NAME	MATERIAL	DRAWING NUMBER
							PAN-TY CABLE TIES RELEASEABLE SERIES	10B0150P/00	10B0150P_DC_PRT/00A	NYLON 6.6	
							CUSTOMER DRAWING				
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				
							.x ± .xx ± .02 [.5]				
							.xxx ± .020 [.51]				
							ANGLES ±				
							THIRD ANGLE PROJECTION				
14	11.17.14	BDK	MPH	JADE	UPDATED TITLE BORDER AND UPDATED NOTES	SS-4472					SS-4472
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 2
							CEW	7-31-85	HVP	NONE	A

D10100DA/16

2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

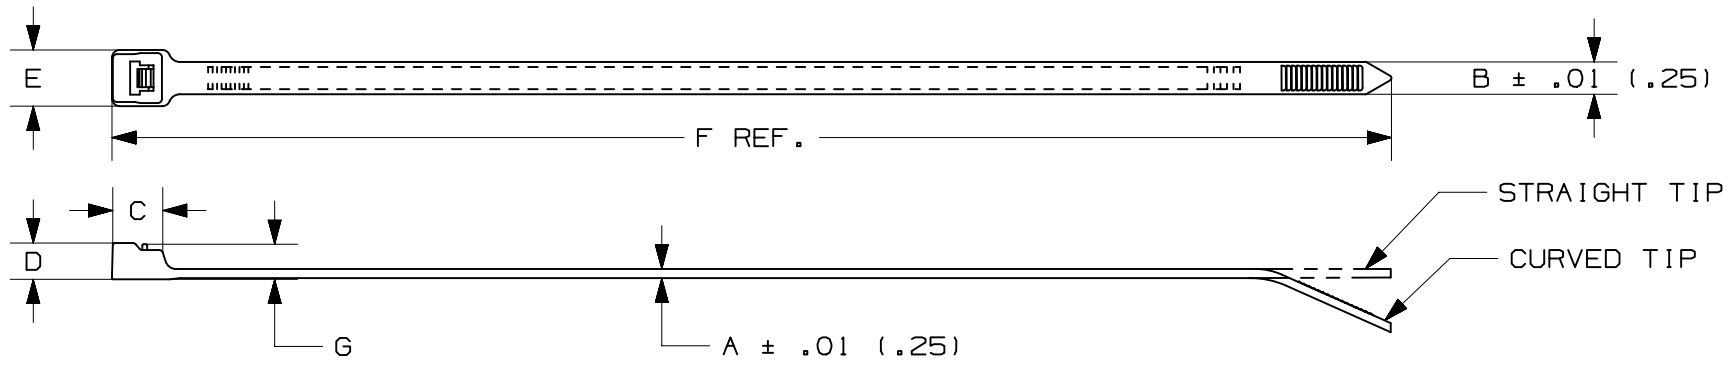

PANDUIT * PART NO.	BUNDLE DIA.		A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	G in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS-SECTION	TIP STYLE	WEIGHT lbs/100pcs (g)
	MIN in (mm)	MAX in (mm)											
PRT2H	.188 (4.8)	2.00 (51)	.075 (1.9)	.300 (7.6)	.413 (10.5)	.300 (7.6)	.480 (12.2)	8.4 (213)	.430 (10.9)	80 (356)	HEAVY	STRAIGHT	.76 (346)
PRT3H	.188 (4.8)	3.00 (76)	.075 (1.9)	.300 (7.6)	.413 (10.5)	.300 (7.6)	.480 (12.2)	11.4 (290)	.430 (10.9)	80 (356)	HEAVY	STRAIGHT	1.04 (473)
PRT4H	.188 (4.8)	4.00 (102)	.075 (1.9)	.300 (7.6)	.413 (10.5)	.300 (7.6)	.480 (12.2)	14.5 (368)	.430 (10.9)	80 (356)	HEAVY	STRAIGHT	1.28 (581)

* SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2	SIZE
14	11.17.14	BDK	MPH	JADE	UPDATED TITLE BORDER AND UPDATED NOTES	SS-4472	CEW	7-31-85	HVP	NONE		A

TITLE		PAN-TY CABLE TIES RELEASESLE SERIES	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		10B0150P/00	
		PANDUIT	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x ± .xx ± .02 [.5]		NYLON 6.6	
.xxx ± .020 [.51]		DRAWING NUMBER:	
ANGLES ±		SS-4472	
THIRD ANGLE PROJECTION			

2

1

D10100DA/16