


No. of Contacts	DIMENSIONS	
	A	B
4	6.00	8.50
5	8.00	10.50
6	10.00	12.50
7	12.00	14.50
8	14.00	16.50
9	16.00	18.50
10	18.00	20.50
11	20.00	22.50
12	22.00	24.50
13	24.00	26.50
14	26.00	28.50
15	28.00	30.50
16	30.00	32.50
17	32.00	34.50

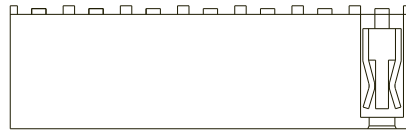


**SPECIFICATIONS**

Current Rating: 1 Amp  
 Insulator Resistance: 5000 Mega Ohm Min.  
 Contact Resistance: 20 milli Ohm Max.  
 Dielectric Withstanding: 500VAC  
 Operating Temperature: -40 Degree C. to +105 Degree C.  
 Max Processing Temp: 230 Degree C. for 30 seconds  
 (260 Degree C. for 10 seconds)  
 Contact Material: Phospher Bronze  
 Insulator Material: Polyester, UL 94V-0  
 Standard: Nylon-6T

Contact Finish: Gold/Tin, Selective Plating

Please refer to Catalog # 35, page 61 for all available configurations. Or refer to drawings on our website at [www.SullinsElectronics.com](http://www.SullinsElectronics.com)

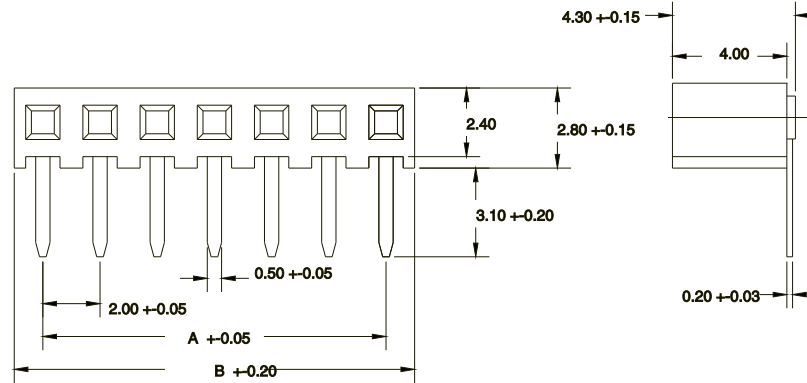

\* Where "xx" is number of positions.

<b>SULLINS</b> 801 E. MISSION RD. SAN MARCOS, CA 92069	GENERAL TOLERANCE		SCALE	DRAWN	DATE	DWG. NO.	TITLE	REV.
	XX. +	XXX. +	NTS	CHECK	DATE	T0031		
	X. + 0.20	.XXX +	UNIT	APPROVE	DATE			
	.X + 0.10	X.B +	MM			PPPxx1FGGN*		
.XX + 0.05	.XB +	SIZE						