



Smart Technology. Delivered.

CRS-CRX RINGO

150 to 174 MHz and 220-222 MHz



CRX-150B

BROADBAND OMNIDIRECTIONAL BASE STATION ANTENNA

These popular omnidirectional antennas have been selected for use with repeaters, talk-around systems, paging systems, security alarms, VHF dedicated systems, 220 trunking systems, and in such applications as police, fire, agricultural and hundreds of others requiring reliability, long life and economy. Field tunable and easy to install, they can be mounted on any vertical tubular support up to 1-1/4 inch (3.2 cm) diameter. Ringo, Ringo Ranger, and Ringo Ranger II can be shipped economically by UPS.

Ringo Ranger II, CRX-150B and CRX-220B, 6 dBi gain

Our most popular base station antenna is now available in the 220 MHz band. Both the CRX-220B (220-222 MHz) and the CRX-150B (150-174 MHz) feature a full 6 dB gain vs. a quarterwave antenna. The Ringo Ranger II is perfect for trunking or any other system where ease of installation, performance and economy are priorities.

Ringo Ranger, CRX-150 and CRX-220, 5 dBi gain


Field tunable and easily installed, the CRX-150 (150-174 MHz) and the CRX-220 (220-222 MHz) have 5 dB gain. Installation involves measuring the radiator length and tightening two clamps; the antenna is assembled just that easily. Add a simple adjustment of the tuning rod, and you're ready to go!

Rugged Ringo CRS-150 and CRS-220, 2 dBi gain

Our Ringo is a single half-wave, end-fed antenna with a matching section featuring a ring inductor. With a frequency range of 150-174 MHz (CRS-150) or 220-222 MHz (CRS-220) and 2 dB gain, the Ringo is completely grounded. It is shipped with a fully assembled base section and requires only adjustment of the radiator tube and simple tuning to be operational. Ringos include stainless steel hardware and radiators fabricated from seamless aluminum tubing.

VHF RINGO SELECTOR GUIDE

MODEL	FREQ. MHz	GAIN dBi	VSWR Nominal	BANDWIDTH 1.5:1 MHz	-3dB BEAMWIDTH E-PLANE°	CONNECTOR (female)	HEIGHT In (cm)	WEIGHT lb (kg)	W/SUR AREA ft ² (m ²)	W/ SURVIVAL
CRX-150B	150-174	7	1.5:1	4	30	UHF	162 (412)	7 (3.2)	1.4 (0.13)	80 (125)
CRX-150	150-174	5	1.5:1	6	36	UHF	116 (294)	5 (2.2)	0.5 (0.05)	80 (125)
CRS-150	150-174	2	1.5:1	7	73	UHF	45 (114)	2 (0.9)	0.18 (0.02)	80 (125)
CRX-220B	220-222	7	1.5:1	2	30	UHF	110 (279)	5 (2.25)	.95 (.088)	80 (125)
CRX-220	220-222	5	1.5:1	2	36	UHF	79 (200)	3.5 (1.57)	.34 (.130)	80 (125)
CRS-220	220-222	2	1.5:1	2	73	UHF	30 (76)	1.5 (.67)	.122 (.017)	80 (125)

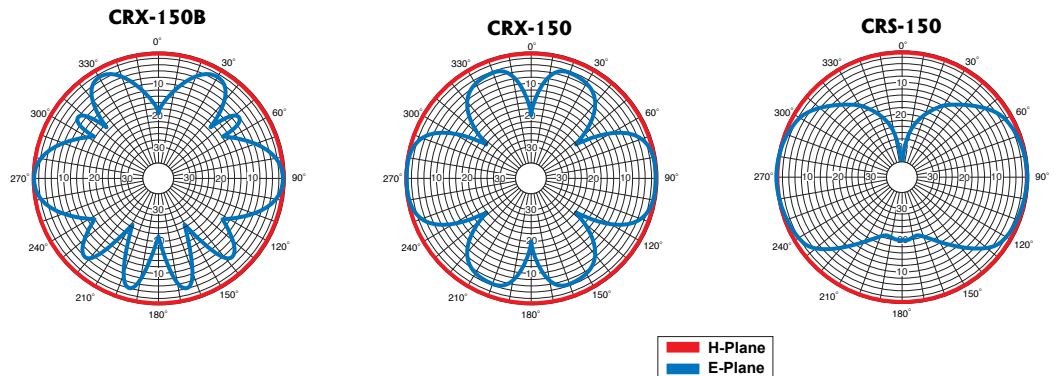

Americas: +1.847.839.6907
 IAS-AmericasEastSales@lairdtech.com
 Europe: +44.1628.858941
 IAS-EUSales@lairdtech.com
 Asia: +86.21.5855.0827.127
 IAS-AsiaSales@lairdtech.com
 www.lairdtech.com

ANT-DS-CRS-CRX RINGO 0915

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.