

Advantech Panel PCs

Diverse offerings for a wide range of applications

- Introduction
- Benefits and Features
- Selection Guide



ADVANTECH

Enabling an Intelligent Planet

www.advantech.com

Advantech's PPC Product Family

Reliable, Cost-Effective, and High-Performance Industrial Panel PCs

Advantech's PPC (panel PC) product family offers highly scalable, economical solutions in a range of performance classes that support various display sizes to satisfy diverse equipment manufacturing and process automation applications. The PPC product portfolio includes an all-in-one series (PPC-3000) and a configurable series (PPC-6000C). The all-in-one series features an optimized design, compact form factor, and industrial-grade specifications, such as rich I/O, flexible expansion slots, and a wide operating temperature range. Regarding the configurable series, these products are designed to be equipped with any mini-ITX motherboard according to price and functionality.

All-in-One Series

Advantech's PPC-3000/3000S series systems are equipped with a fanless, low-power Intel® Core™ i/Atom™ processor. The standard PPC model (PPC-3000 series) features rich I/O and expansion slots that enable system integrators to build complex systems. Meanwhile, the PPC-3000S series systems, which are aimed at industrial IoT applications, are ultra slim devices that feature a stylish appearance to ensure easy integration.

All-in-One

- Fanless
- Compact
- Low power consumption

General Purpose

- Essential I/O
- Ultra slim
- All-metal body

Industry Oriented

- Rich I/O
- Slim
- Expandible
- Wide temperature range

Configurable Series

Compatible with diverse mini-ITX motherboards, the PPC-6000C series allows system integrators to configure the device according to their exact usage requirements. This flexibility and versatility makes PPC-6000C ideal for applications that require high-performance computing and multiple expansions, such as machine vision operations.

Configurable

- Fan
- High computing power
- Selectable motherboard

Customizable

Features




IP65-rated true-flat panel

In addition to IP65 certification for dust and water resistance, Advantech's panel PCs are equipped with a true flat P-CAP/resistive touchscreen, giving the system an elegant and stylish appearance.



Rich industrial-grade I/O

To ensure excellent connectivity for integrating devices and peripherals, Advantech's PPC systems are equipped with multiple industrial-grade I/O, including isolated RS-422/485, GPIO, RS-232, USB 3.0, DisplayPort, and Line Out ports.



intel Core i

intel

PPC-3001S

- 6th gen Intel® Core™ i processor
- PCAP touch screen control
- All-metal body



PPC-3000S

- Intel® Celeron® N4200/N2930/N2807 processor
- PCAP/resistive touch screen control
- All-metal body

PPC-3001

- 6/7th gen Intel® Core™ i processor
- PCAP/resistive touch screen control
- PCIe x4/PCI expansion



PPC-3000

- Intel® Atom™ E3845/E3940 processor
- Wide operating temperature (-20 ~ 60 °C/-4 ~ 140 °F)
- Resistive touch screen control
- PCIe x1/PCI expansion


PPC-6000C

- Compatible with diverse mini-ITX MBs
- Supports CPUs with up to 65W TDP
- PCAP/resistive touch screen control
- PCIe x4/2 x PCI or PCIe x1




Expansion slots

PPC series systems feature expansion slots that support a range of optional riser cards, such as PCI, PCIe x1, and PCIe x4, to enable flexible expansion according to the platform specifications.



Wide operating temperature range


All PPC-3000 series systems equipped with an Intel® Atom™ processor support a wide operating temperature range of -20 ~ 60 °C, making them suitable for operation in harsh environments.



Wide input power range

With support for a wide input power range of 12 ~ 24 V_{DC}, Advantech PPC systems can be operated in various industrial environments without necessitating an additional power converter or generating increased energy costs.

Atom

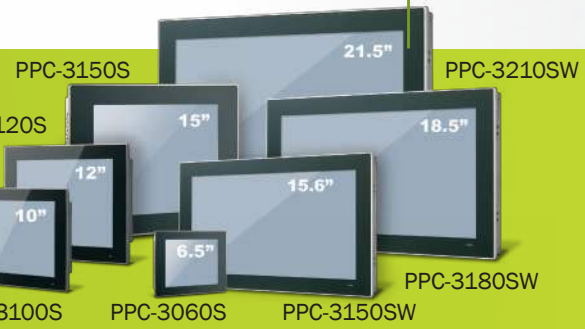

All-metal body
PPC-3000S series products are designed with an all-metal body to ensure an elegant and streamlined appearance.

Accessories

PPC-IPS-AE



A lightweight, intelligent power management module that protects the system from electrical damage and reduces the potential for data losses. This module can serve as a temporary power source during short-term power outages and can ensure safe system shutdowns.



PPC-STAND-A1E

An elegant desktop stand made of aluminum alloy that supports VESA 75/100. This stand allows users to adjust the vertical viewing angle and can be affixed to surfaces using two screws.



PPC-ARM-A03

A swivel arm equipped with a C-clamp to enable installation on any surface. The swivel arm supports 360-degree rotation.



PPC-174T-WL-MTE

A compact wall-mount kit that supports 360-degree rotation and vertical/horizontal viewing angle adjustment.



PPC-WLAN-C1E

An optional WiFi + BT4.2 Combo Module with dual antennae (2T2R) and 802.11 a/b/g/n/ac support.

	PPC-3001S			PPC-3000S						
Model	NEW PPC-3151SW/3181SW/3211SW			PPC-3060S	PPC-3100S/3120S/3150S/3210SW				NEW PPC-3150SW/3180SW	
CPU	6th Gen Intel® Core™ i5-6300U			Intel® Celeron® N2807 (1.58 GHz)	Intel® Celeron® N2930 (1.86 GHz)				Intel® Pentium® N4200 (1.1G up to 2.5GHz)	
Memory	1 x SODIMM DDR4 1866/2133 MHz (up to 16 GB)			1 x SODIMM DDR3L 1333 (up to 4 GB)	1 x SODIMM DDR3L, 1333 MHz (up to 8 GB)				1 x SODIMM, DDR3L 1600/1866 (up to 8GB)	
Display Size	15.6"	18.5"	21.5"	6.5"	10.4"	12.1"	15"	21.5"	15.6"	18.5"
Max. Resolution	1920 x 1080	1366 x 768	1920 x 1080	640 x 480	800 x 600	1024 x 768	1024 x 768	1920 x 1080	1366 x 768	1366 x 768
Luminance (cd/m ²)	450	450	300	700	400	500	400	300	400	450
Backlight MTBF	50,000	50,000	50,000	50,000	30,000	30,000	50,000	50,000	50,000	50,000
Touchscreen	Multi-touch projected capacitive			5-wire analog resistive				PCT	Multi-touch projected capacitive	
Network (LAN)	2 x GbE (Intel® I211-AT, I219LM)			2 x GbE (Intel® I211)				2 x GbE (Intel® I211)		
I/O	1 x RS-232, 1x RS-232/422/485 (by BIOS), 2 x USB 3.0, 2 x USB 2.0, 1 x HDMI, 1 x TPM2.0 (optional module),			1 x RS-232, 1x RS-232/422/485 (by BIOS), 2 x USB 2.0, 1 x USB 3.0,				1 x RS-232, 1x RS-232/422/485 (by BIOS), 2 x USB 3.0, 2 x USB 2.0, 1 x Line-out, 1 x HDMI,		
Storage	1 x 2.5" SATA bay, 1 x mSATA bay			1 x 2.5" SATA bay (optional), 1 x mSATA bay				1 x 2.5" SATA bay (optional), 1 x mSATA bay		
Expansion Slots	N/A			N/A				N/A		
Additional Expansion	1 x Full-size Mini PCIe			1 x Full-size Mini PCIe				1 x Full-size Mini PCIe		
Input Power	12 ~ 24 V _{DC}			12 ~ 24 V _{DC}				12 ~ 24 V _{DC}		
Operating Temperature	0 ~ 50 °C with SSD			0 ~ 50 °C with SSD				0 ~ 50 °C with SSD		
Operating System	Windows 7/10 (64bit), Linux			Windows 7/10 (64bit), Linux, Android 6.0				Windows 10 (64bit), Linux, Android 8.0		

	PPC-3001			PPC-3000					PPC-6000C			
Model	PPC-3151	NEW PPC-3151W/3211W	NEW PPC-3100/3120-RE9A	PPC-3150/3170/3190			NEW PPC-6121	PPC-6151C	PPC-6171C	PPC-6191C		
CPU	6th Gen Intel® Core™ i5-6300U	7th Gen Intel® Core™ i5-7300U	Intel® Atom™ E3940 (1.6 GHz)	Intel® Atom™ E3845 (1.91 GHz)			8th Gen Intel® Core™ i / Celeron® processor	Supports processors with up to 65 W TDP depending on the Mini-ITX motherboard				
Memory	1 x SODIMM DDR4, 1866/2133 MHz (up to 16 GB)		1 x SODIMM DDR3L 1600/1866 MHz (up to 8 GB)	1 x SODIMM DDR3L 1333 MHz (up to 8 GB)			2 x 260-pin SO-DIMM DDR4, 2666 MHz (up to 32 GB, 16 GB per SODIMM)	Dependent on the Mini-ITX motherboard specifications				
Display Size	15"	15.6"	21.5"	10.4"	12.1"	15"	17"	19"	12.1"	15"	17"	19"
Max. Resolution	1024 x 768	1920 x 1080	1920 x 1080	800 x 600	1024 x 768	1024 x 768	1280 x 1024	1280 x 1024	1024 x 768	1024 x 768	1280 x 1024	1280 x 1024
Luminance (cd/m ²)	400	450	300	400	600	400	350	350	600	400	350	350
Backlight MTBF	50,000	50,000	50,000	30,000	50,000	50,000	50,000	50,000	50,000	50,000	50,000	50,000
Touchscreen	Multi-touch projected capacitive			5-wire analog resistive		5-wire analog resistive		5-wire analog resistive		5-wire analog resistive		
Network (LAN)	2 x GbE (Intel® I211-AT, I219LM)			2 x GbE (Intel® I210)		2 x GbE (Intel® I210)		2 x GbE (Intel® I211-AT, I219LM)		Dependent on the Mini-ITX motherboard specifications		
I/O	1 x isolated RS-422/485, 4 x RS-232 (2 x by optional module), 1 x GPIO (8 channels, TTL level), 4 x USB 3.0, 1 x VGA, 1 x DP1.2, 1 x Line-Out, 1 x Mic-In, 1 x TPM2.0 (optional module)		4 x RS-232, 1 x isolated RS-422/485 (by BIOS), 4 x USB 3.0, 1 x Line-out, 1 x Mic-in, 1 x VGA, 1 x HDMI, 1 x GPIO (8 channels, TTL),	1 x isolated RS-422/485, 4 x RS-232 (2 x by optional module), 1 x GPIO (8 channels, TTL level), 1 x USB 3.0, 3 x USB 2.0, 1 x VGA, 1 x DP1.1a, 1 x Line-Out, 1 x Mic-In		4 x RS-232, 1 x isolated RS-422/485, 4 x USB3.1, 1 x VGA, 1 x HDMI 1.4, 1 x Mic in, 1 x Line out, 1 x GPIO (8channels, TTL)		4 x Reserved ports 2 x WLAN antenna ports				
Storage	1 x 2.5" SATA bay, 1 x M.2 bay (22 x 42 mm)	2 x 2.5" SATA bay, 1 x M.2 bay (22 x 42 mm)	1 x 2.5" SATA bay, 1 x mSATA bay	1 x 2.5" SATA bay, 1 x mSATA bay		1 x 2.5" SATA bay, 1 x mSATA bay		1 x 2.5" SATA bay, 1 x mSATA bay		1 x 2.5" SATA bay, 2 x 2.5" SATA bay (optional)		
Expansion Slots	1 x PCIe x4 or PCI			N/A	(optional) 1 x PCIe x1 or 1 PCI	1 x PCI or 1 x PCIe x1		(optional) 1 x PCIe x4 or 1 x PCI		2 x PCI or 1 x PCIe x 4 (in the accessory box)		
Additional Expansion	1 x Full-size Mini PCIe, (optional) 1 x Cfast,			1 x Full-size Mini PCIe		1 x Full-size Mini PCIe, (optional) 1 x Cfast,		1 x M.2 2230 (E Key)		Dependent on the Mini-ITX motherboard specifications		
Input Power	9 ~ 32 V _{DC}	9 ~ 32 V _{DC}	12 ~ 32 V _{DC}	9 ~ 32 V _{DC}		9 ~ 32 V _{DC}		12 ~ 30 V _{DC}		100 ~ 240 V _{AC} @ 50/60 Hz		
Operating Temperature	0 ~ 50 °C with SSD			-20 ~ 60 °C with SSD		-20 ~ 60 °C with SSD		0 ~ 50 °C with SSD		0 ~ 50 °C with 35W CPU 0 ~ 45 °C with 65W CPU		
Operating System	Windows 7/10 (64bit), Linux	Windows 10 (64bit), Linux		Windows 10 (64bit), Linux, Android 8.0		Windows 7/10(64bit), WEC7, Linux, Android 6.0		Windows 10 (64bit), Linux		Dependent on the Mini-ITX motherboard specifications		

Regional Service & Customization Centers

China	Kunshan 86-512-5777-5666	Taiwan	Taipei 886-2-2792-7818	Netherlands	Eindhoven 31-40-267-7000	Poland	Warsaw 00800-2426-8080	USA	Milpitas, CA 1-408-519-3898
--------------	-----------------------------	---------------	---------------------------	--------------------	-----------------------------	---------------	---------------------------	------------	--------------------------------

Worldwide Offices

Greater China

China	
Toll Free	800-810-0345
Beijing	86-10-6298-4346
Shanghai	86-21-3632-1616
Shenzhen	86-755-8212-4222
Chengdu	86-28-8545-0198
Hong Kong	852-2720-5118
Taiwan	
Toll Free	0800-777-111
Taipei & IoT Campus	886-2-2792-7818
Taichung	886-4-2372-5058
Kaohsiung	886-7-392-3600

Middle East and Africa

Israel	072-2410527
--------	-------------

Asia

Japan	
Toll Free	0800-500-1055
Tokyo	81-3-6802-1021
Osaka	81-6-6267-1887
Nagoya	81-0800-500-1055
Korea	
Toll Free	080-363-9494/5
Seoul	82-2-3660-9255
Singapore	
Singapore	65-6442-1000
Malaysia	
Kuala Lumpur	60-3-7725-4188
Penang	60-4-537-9188
Thailand	
Bangkok	66-02-2488306-9
Vietnam	
Hanoi	84-24-3399-1155
Indonesia	
Jakarta	62-21-751-1939
Australia	
Toll Free	1300-308-531
Melbourne	61-3-9797-0100
India	
Bangalore	91-80-6814-4600
Pune	91-94-2260-2349

Europe

Netherlands	
Eindhoven	31-40-267-7000
Breda	31-76-523-3100
Germany	
Toll Free	00800-2426-8080/81
Munich	49-89-12599-0
Düsseldorf	49-2103-97-855-0
France	
Paris	33-1-4119-4666
Italy	
Milan	39-02-9544-961
UK	
Newcastle	44-0-191-262-4844
London	44-0-870-493-1433
Spain	
Madrid	34-91-668-86-76
Sweden	
Stockholm	46-0-864-60-500
Poland	
Warsaw	48-22-31-51-100
Russia	
Moscow	8-800-555-01-50
St. Petersburg	8-800-555-81-20
Czech Republic	
Ústí nad Orlicí	420-465-524-421
Ireland	
Galway	353-91-792444

Americas

North America	
Toll Free	1-888-576-9668
Cincinnati	1-513-742-8895
Milpitas	1-408-519-3898
Irvine	1-949-420-2500
Ottawa	1-815-433-5100
Brazil	
Toll Free	0800-770-5355
São Paulo	55-11-5592-5367
Mexico	
Toll Free	1-800-467-2415
Mexico City	52-55-6275-2727

Buy Now



ADVANTECH

Enabling an Intelligent Planet

www.advantech.com

Please verify specifications before quoting. This guide is intended for reference purposes only. All product specifications are subject to change without notice.

No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of the publisher.

All brand and product names are trademarks or registered trademarks of their respective companies. © Advantech Co., Ltd. 2019

860000493